


IA5130



Inductive sensor

IAE3010-BPKG/US-100/ANGLED

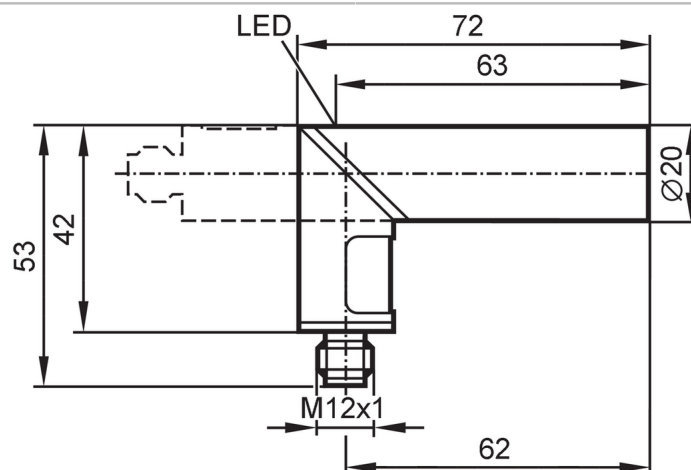

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	10
Housing	tubular
Dimensions [mm]	Ø 20 / L = 72

Application

Application	Industrial applications
-------------	-------------------------

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	300
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	10
Real sensing range Sr [mm]	10 ± 10 %
Operating distance [mm]	0...8.1

IA5130



Inductive sensor

IAE3010-BPKG/US-100/ANGLED

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis [% of Sr]		1...15
Switch-point drift [% of Sr]		-10...10

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	1147	

Mechanical data

Weight [g]	87.7
Housing	tubular
Mounting	non-flush mountable
Dimensions [mm]	Ø 20 / L = 72
Material	housing: PBT; LED window: PC

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	Mounting clamp: 1
----------------	-------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 4



Connection

