


IB5063



Inductive sensor

IBE3020-FPKG

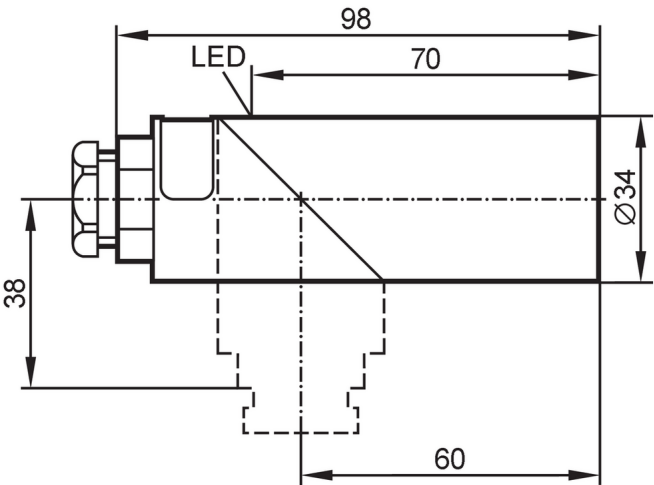

Product characteristics

Electrical design	PNP
Output function	normally open / closed; (selectable)
Sensing range [mm]	20
Housing	tubular
Dimensions [mm]	Ø 34 / L = 98

Application

Application	Industrial applications
-------------	-------------------------

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	350
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	20
Real sensing range Sr [mm]	20 ± 10 %
Operating distance [mm]	0...16.2



Inductive sensor

IBE3020-FPKG

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15
Switch-point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 65

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	2450
UL approval	Ta	0...40 °C
	Enclosure type	Type 1
	File number UL	E174191

Mechanical data

Weight	[g]	186.5
Housing		tubular
Mounting		non-flush mountable
Dimensions	[mm]	Ø 34 / L = 98
Material		housing: PBT; bevelled housing part: PC

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	Mounting clamp: 1
----------------	-------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: ...2.5 mm²; Cable sheath: Ø 7...13 mm; Cable gland: M20 X 1.5

Connection

