


IF503A



Inductive full-metal sensor

IFK3003BBPKG/AM/US104DPS/3G/3D

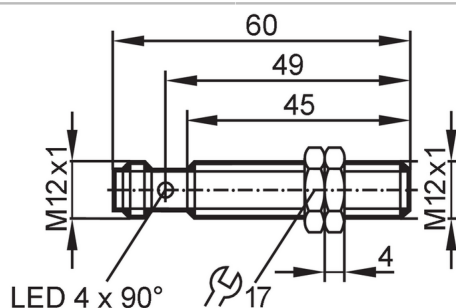

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	3
Housing	Threaded type
Dimensions [mm]	M12 x 1 / L = 60

Application

Special feature	gold-plated contacts; Increased sensing range; Full-metal housing	
Application	For applications in hazardous areas	
Pressure rating	100 bar	10 MPa
Note on pressure rating	sensing face	

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 20
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	100
Short-circuit protection	yes
Overload protection	yes

Monitoring range

Sensing range [mm]	3
Real sensing range Sr [mm]	3 ± 10 %
Operating distance [mm]	0...2.43
Increased sensing range	yes

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.6 / brass: 0.7 / aluminum: 0.6 / copper: 0.3
Hysteresis [% of Sr]	1...20

IF503A



Inductive full-metal sensor

IFK3003BBPKG/AM/US104DPS/3G/3D

Switch-point drift	[% of Sr]	-10...10
--------------------	-----------	----------

Operating conditions

Ambient temperature	[°C]	-40...60
---------------------	------	----------

Protection	IP 67; (when used outside the hazardous area: IP 65, IP 67, IP 68, IP 69K)	
------------	--	--

Tests / approvals

Approval	BVS 20 ATEX E 055 X; IECEx BVS 20.0042 X	
----------	--	--

ATEX marking	II 3G Ex ec IIC T6 Gc	
--------------	-----------------------	--

	II 3D Ex tc IIIC T85°C Dc	
--	---------------------------	--

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
-----	------------------	-------------------

EN 61000-4-3 HF radiated	10 V/m
--------------------------	--------

EN 61000-4-4 Burst	2 kV
--------------------	------

EN 61000-4-6 HF conducted	10 V
---------------------------	------

EN 55011	class B
----------	---------

Impact resistance	EN 60068-2-75 Ehc	1 J
-------------------	-------------------	-----

Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles per frequency; 1 octave per minute in 3 axes
----------------------	-----------------	--

Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
------------------	------------------	--

Continuous shock resistance	EN 60068-2-27 Ea	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
-----------------------------	------------------	---

Fast temperature changes	EN 60068-2-14 Na	TA = -40°C; TB = 85°C; t1 = 30 min; t2 = 10 s 50 cycles
--------------------------	------------------	--

Salt spray test	EN 60068-2-52 Kb	severity level 5 (4 test cycles)
-----------------	------------------	----------------------------------

MTTF	[years]	1258
------	---------	------

Embedded software included	no	
----------------------------	----	--

Mechanical data

Weight	[g]	54
--------	-----	----

Housing	Threaded type	
---------	---------------	--

Mounting	flush mountable	
----------	-----------------	--

Dimensions	[mm]	M12 x 1 / L = 60
------------	------	------------------

Thread designation	M12 x 1	
--------------------	---------	--

Material	housing: stainless steel (1.4404 / 316L); LED window: PEI; lock nuts: stainless steel	
----------	---	--

Tightening torque	[Nm]	15
-------------------	------	----

Full-metal housing	yes	
--------------------	-----	--

Displays / operating elements

Display	Switching status	4 x 90° LED, yellow
---------	------------------	---------------------

Accessories

Items supplied	lock nuts: 2	
----------------	--------------	--

Remarks

Pack quantity	1 pcs.	
---------------	--------	--

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 3, gold-plated




IF503A



Inductive full-metal sensor

IFK3003BBPKG/AM/US104DPS/3G/3D

Connection

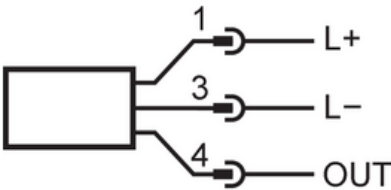

1	L+	
3	L-	
4	OUT	DO (NO)

DO: digital output; NO: normally open