


IFC263



Inductive full-metal sensor

IFK32,5BBPKG/AM/US-104/K0

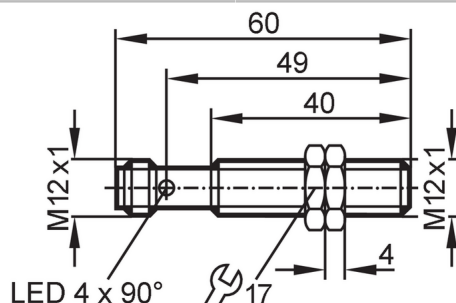

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	2.5
Housing	Threaded type
Dimensions [mm]	M12 x 1 / L = 60

Application

Special feature	gold-plated contacts; Increased sensing range; Full-metal housing; correction factor = 0	
Application	Oils and coolants; Ferrous only; aluminum chip immune	
Pressure rating	100 bar	10 MPa
Note on pressure rating	sensing face	

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 20
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	100
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	2.5
Operating distance [mm]	0...2.02
Increased sensing range	yes

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.5
-------------------	---------------------------------



Inductive full-metal sensor

IFK32,5BBPKG/AM/US-104/K0

Hysteresis	[% of Sr]	1...20
Correction factor = 0		yes

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 68; ("Coolant")

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
Impact resistance	EN 60068-2-27 Ehc	1 J
MTTF	[years]	1114
Embedded software included		no
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	A012
	File number UL	E174191

Mechanical data

Weight	[g]	28.1
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M12 x 1 / L = 60
Thread designation		M12 x 1
Material		housing: stainless steel (1.4404 / 316L); sensing face: stainless steel (1.4404 / 316L); LED window: PEI; lock nuts: brass white bronze coated
Tightening torque	[Nm]	15
Full-metal housing		yes

Displays / operating elements

Display	Switching status	4 x 90° LED, yellow
---------	------------------	---------------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 3, gold-plated




IFC263



Inductive full-metal sensor

IFK32,5BBPKG/AM/US-104/K0

Connection

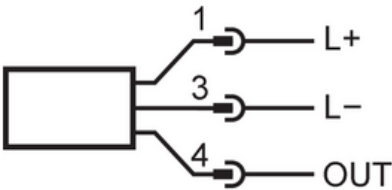

1	L+	
3	L-	
4	OUT	DO (NO)

DO: digital output; NO: normally open