


Inductive sensor

IG-3005-BPKG/6M

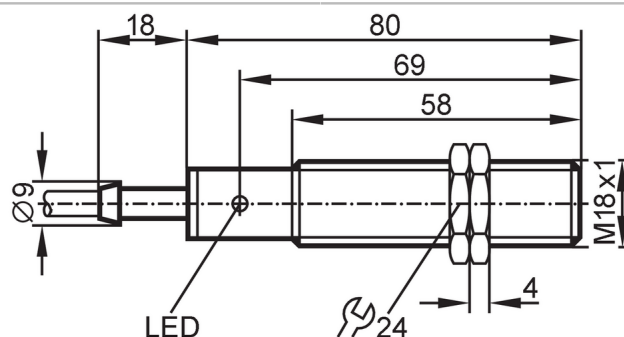

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	5
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 80

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	500
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	5
Real sensing range S_r [mm]	$5 \pm 10 \%$
Operating distance [mm]	0...4.05

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2
Hysteresis [% of S_r]	1...15
Switch-point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...80
--------------------------	----------

IG5339



Inductive sensor

IG-3005-BPKG/6M

Protection	IP 67
------------	-------

Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	1884

Mechanical data

Weight [g]	331.5
Housing	Threaded type
Mounting	flush mountable
Dimensions [mm]	M18 x 1 / L = 80
Thread designation	M18 x 1
Material	housing: PBT

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 6 m, PVC; 3 x 0.5 mm²

Connection

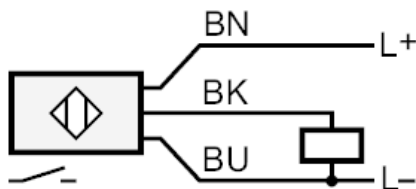

BK =	Core colors :
BN =	black
BU =	brown
	blue