




Inductive sensor

IGB4010-CPKG/V4A/US-104-DPA

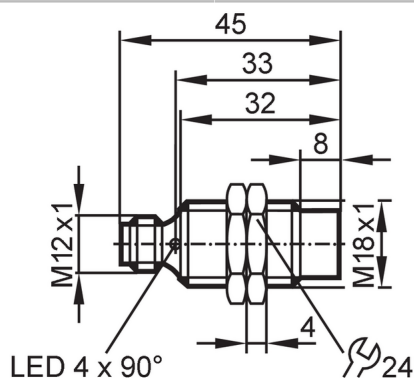

Product characteristics

Electrical design	PNP
Output function	complementary
Sensing range [mm]	10
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 45

Application

Special feature	gold-plated contacts
Application	Industrial applications

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	complementary
Max. voltage drop switching output DC [V]	2.5
Max. leakage current [mA]	0.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	300
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	10
Real sensing range S_r [mm]	$10 \pm 10 \%$
Operating distance [mm]	0...8.1



Inductive sensor

IGB4010-CPKG/V4A/US-104-DPA

Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	3...15	
Switch-point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature		[°C]	-25...80
Protection		IP 67	
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	3 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5 kV line to line, Ri: 2 Ohm
		EN 61000-4-6 HF conducted	3 V
		EN 55011 emission	class B
MTTF	[years]	1447	
Mechanical data			
Weight		[g]	41.6
Housing		Threaded type	
Mounting		non-flush mountable	
Dimensions		[mm]	M18 x 1 / L = 45
Thread designation		M18 x 1	
Material		stainless steel (1.4571/316Ti); sensing face: PBT	
Displays / operating elements			
Display		Switching status	4 x 90° LED, red
Accessories			
Items supplied		lock nuts: 2	
Remarks			
Pack quantity		1 pcs.	
Electrical connection - plug			
Connector: 1 x M12; coding: A; Contacts: 4, gold-plated			
			

IG5846



Inductive sensor

IGB4010-CPKG/V4A/US-104-DPA

Connection

