




Inductive sensor

IGA3008-BPKG/BS-201-APS/94MM

Article to be discontinued
Discontinuation date: 03/31/2026

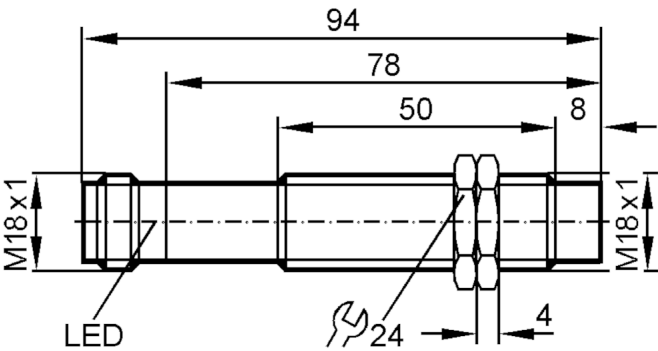

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	8
Housing		Threaded type
Dimensions	[mm]	M18 x 1 / L = 94
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)



Inductive sensor

IGA3008-BPKG/BS-201-APS/94MM

Overload protection	yes
---------------------	-----

Monitoring range

Sensing range	[mm]	8
Real sensing range S_r	[mm]	$8 \pm 10 \%$
Operating distance	[mm]	0...6.5

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of S_r]	3...15
Switch-point drift	[% of S_r]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 65

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	1853

Mechanical data

Weight	[g]	63.7
Housing		Threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 94
Thread designation		M18 x 1
Material		housing: brass nickel-plated; sensing face: PC

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M18; coding: A



IG5893



Inductive sensor

IGA3008-BPKG/BS-201-APS/94MM

Connection

