




Inductive sensor

IGK2008BFRKG/2LED/US-104

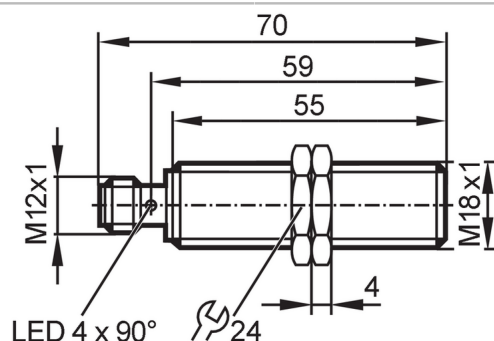

Product characteristics

Electrical design	PNP/NPN
Output function	normally open / closed; (selectable)
Sensing range [mm]	8
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 70

Application

Special feature	gold-plated contacts; Increased sensing range; optical setting aid
Application	Industrial applications

Electrical data

Operating voltage [V]	10...30 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	4.6
Minimum load current [mA]	4
Max. leakage current [mA]	1
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	400
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	8
Operating distance [mm]	0...6.5
Increased sensing range	yes

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.5 / copper: 0.4
-------------------	--

IG5953



Inductive sensor

IGK2008BFRKG/2LED/US-104

Hysteresis	[% of Sr]	1...15
------------	-----------	--------

Operating conditions

Ambient temperature	[°C]	-25...70
---------------------	------	----------

Protection	IP 68; ("Coolant")
------------	--------------------

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5 kV line to line, Ri: 2 Ohm
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B

MTTF	[years]	1424
------	---------	------

Mechanical data

Weight	[g]	52.7
--------	-----	------

Housing	Threaded type
---------	---------------

Mounting	flush mountable
----------	-----------------

Dimensions	[mm]	M18 x 1 / L = 70
------------	------	------------------

Thread designation	M18 x 1
--------------------	---------

Material	housing: brass white bronze coated; sensing face: PBT orange; LED window: PEI; lock nuts: brass white bronze coated
----------	--

Tightening torque	[Nm]	25
-------------------	------	----

Displays / operating elements

Display	Switching status	4 x 90° LED, yellow
---------	------------------	---------------------

Setting aid	1 x LED, red
-------------	--------------

Optical setting aid	yes
---------------------	-----

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated



IG5953



Inductive sensor

IGK2008BFRKG/2LED/US-104

Connection

