




Inductive sensor

IW-3008-ANKG

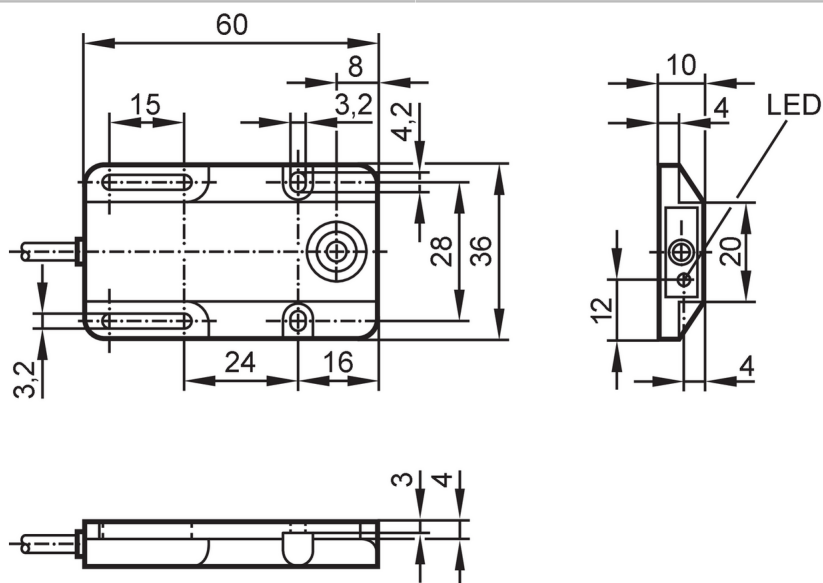

Product characteristics

Electrical design		NPN
Output function		normally open
Sensing range	[mm]	8
Housing		rectangular
Dimensions	[mm]	60 x 36 x 10

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes

Outputs

Electrical design		NPN
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	120
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Sensing range	[mm]	8
Real sensing range Sr	[mm]	8 ± 10 %
Operating distance	[mm]	0...6.5

IW5008



Inductive sensor

IW-3008-ANKG

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis [% of Sr]		1...15
Switch-point drift [% of Sr]		-10...10

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	1745	

Mechanical data

Weight [g]	58.6
Housing	rectangular
Mounting	non-flush mountable
Dimensions [mm]	60 x 36 x 10
Material	housing: PBT

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PVC; 3 x 0.14 mm²

Connection

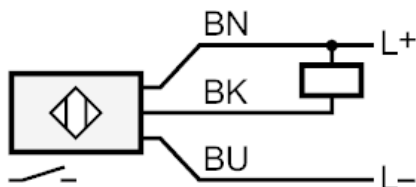

Core colors :
BN = brown
BU = blue
BK = black