


KQ5102



Capacitive sensor

KQ-3120NFPKG/0,04M/AS

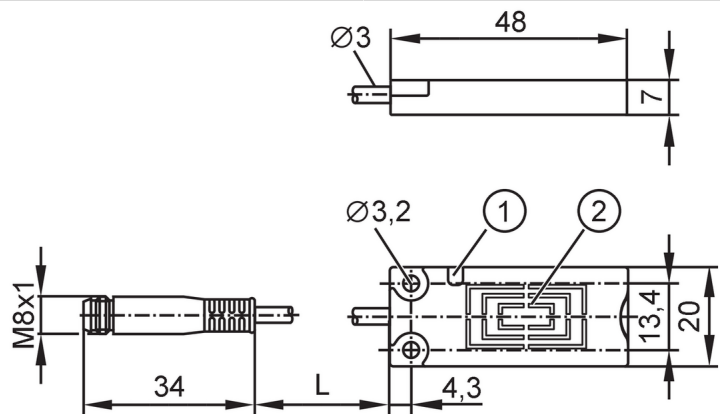

- 1 LED
2 sensing face



Product characteristics

Electrical design	PNP
Output function	normally open / closed; (selectable)
Sensing range [mm]	12
Communication interface	IO-Link
Housing	rectangular
Dimensions [mm]	20 x 7 x 48

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 17
Protection class	III
Reverse polarity protection	yes
Measuring principle	capacitive

Outputs

Electrical design	PNP
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	10
Short-circuit protection	yes
Overload protection	yes

Monitoring range

Sensing range [mm]	12
Real sensing range Sr [mm]	12 ± 10 %

Accuracy / deviations

Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-20...20

KQ5102



Capacitive sensor

KQ-3120NFPKG/0,04M/AS

Software / programming		
Parameter setting options		only via IO-Link
Interfaces		
Communication interface		IO-Link
Transmission type		COM1 (4,8 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9 CDV
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Multiple switching signal
	Function	Process data variable
	Function	Teach channel
SIO mode		yes
Min. process cycle time [ms]		100.8
Supported DeviceIDs		Type of operation default
		DeviceID 371
Operating conditions		
Ambient temperature [°C]		-25...80
Note on ambient temperature		for UL application: ...50 °C
Protection		IP 65; IP 67; IP 69K
Tests / approvals		
EMC	EN 61000-4-2	8 kV AD
	EN 61000-4-3	10 V/m
	EN 61000-4-4	2 kV
	EN 61000-4-6	3 V
	EN 55011	class B
Vibration resistance	EN 60068-2-6 Fc	(10...55 Hz) / 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz
Shock resistance	EN 60068-2-27 Ea	30 g 6 shocks / 11 ms half-sine (x, y, z)
MTTF [years]		771
UL approval	Ta	-25...50 °C
	Enclosure type	Type 1
	voltage supply	Class 2
Mechanical data		
Weight [g]		17.9
Housing		rectangular
Mounting		non-flush mountable
Dimensions [mm]		20 x 7 x 48
Material		PBT; TPE-U; stainless steel
Displays / operating elements		
Display		Switching status 1 x LED, yellow
Remarks		
Pack quantity		1 pcs.

KQ5102




Capacitive sensor

KQ-3120NFPKG/0,04M/AS


Electrical connection - plug

Cable: 0.04 m, PUR, Ø 2.9 mm

Connector: 1 x M8; coding: A; Contacts: 3



Connection

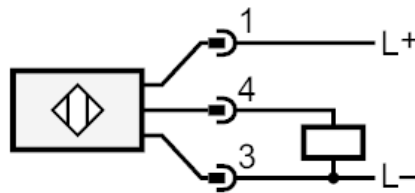

4: OUT / IO-Link