


KT5006



Capacitive touch sensor

KTRSHMK-RBPKG/AM/AS/0,3M

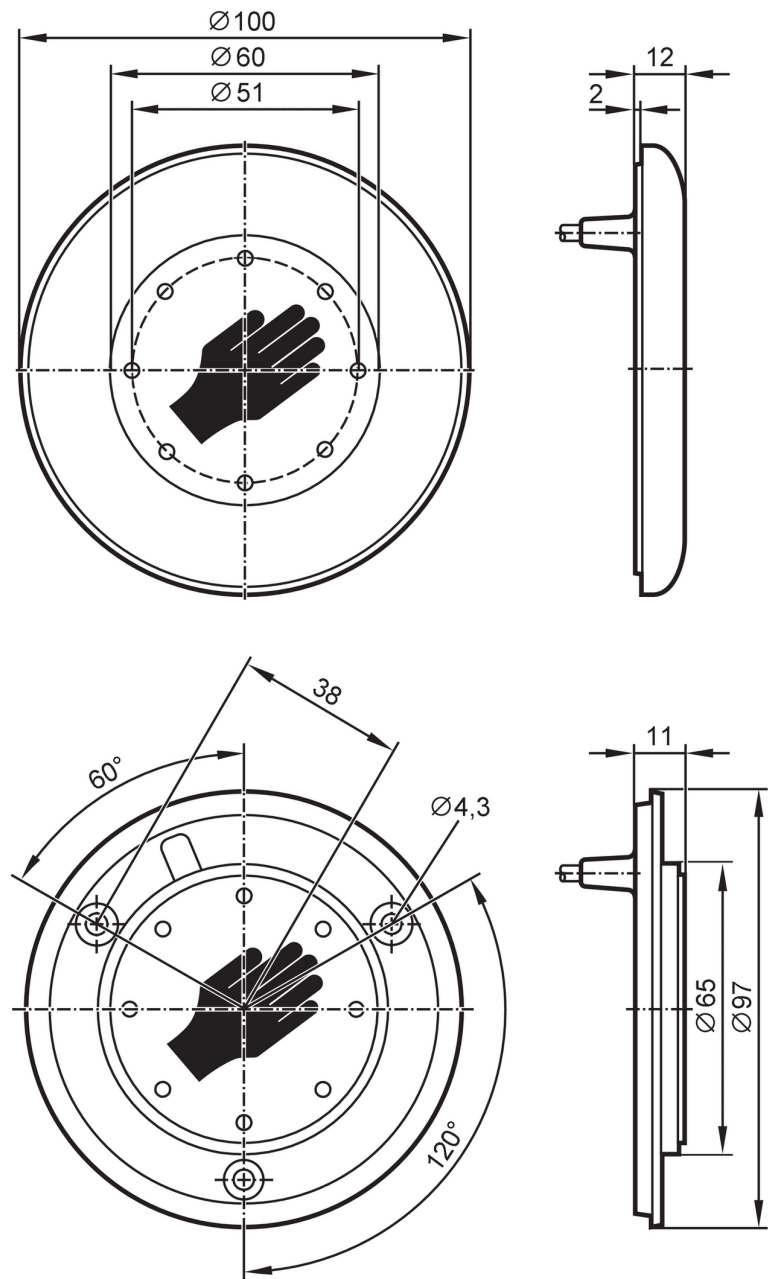

Product characteristics

Electrical design	PNP
Output function	normally open
Housing	tubular
Dimensions [mm]	Ø 100 / L = 11

Application

Principle of operation	static
------------------------	--------

Electrical data

Operating voltage [V]	12...30 DC
Current consumption [mA]	30

KT5006



Capacitive touch sensor

KTRSHMK-RBPKG/AM/AS/0,3M

Protection class	III
Reverse polarity protection	yes
Max. power-on delay time [ms]	500

Outputs

Electrical design	PNP
Output function	normally open
Permanent current rating of switching output DC [mA]	200
Short-circuit proof	yes
Overload protection	yes

Reaction times

Response time [ms]	35
--------------------	----

Operating conditions

Ambient temperature [°C]	-40...85
Protection	IP 67; IP 69K; (on the front)

Tests / approvals

MTTF [years]	394
--------------	-----

Mechanical data

Weight [g]	129.5
Housing	tubular
Dimensions [mm]	Ø 100 / L = 11
Material	actuating surface: PA Grilamid TR 90UV transparent; housing: PC/ABS black; Colored surround: PC/ABS green

Displays / operating elements

Display	Switching status	8 x LED, red
	Power	8 x LED, green

Accessories

Accessories (optional)	surround in different colors
------------------------	------------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Cable: 0.3 m, PUR

Connector: 1 x M8; coding: A; Contacts: 4



KT5006



Capacitive touch sensor

KTRSHMK-RBPKG/AM/AS/0,3M

Connection

