


KT5013



Capacitive touch sensor

KTRSHOK-RBPKG/AM/AS/0,3M

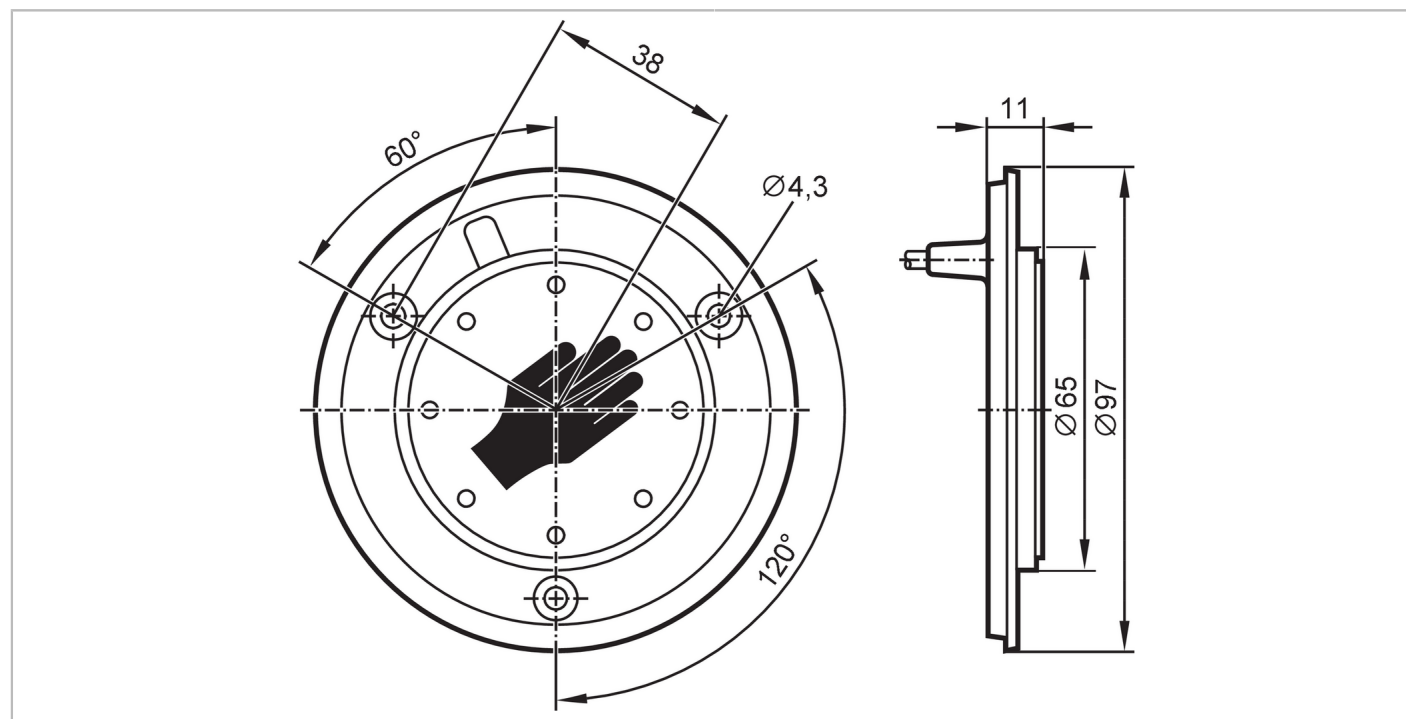

Product characteristics

Electrical design	PNP
Output function	normally open
Housing	tubular
Dimensions [mm]	Ø 96.9 / L = 11

Application

Principle of operation	static
------------------------	--------

Electrical data

Operating voltage [V]	12...30 DC
Current consumption [mA]	30
Protection class	III
Reverse polarity protection	yes
Max. power-on delay time [ms]	500

Outputs

Electrical design	PNP
Output function	normally open
Permanent current rating of switching output DC [mA]	200
Short-circuit protection	yes
Overload protection	yes

Reaction times

Response time [ms]	35
--------------------	----

Operating conditions

Ambient temperature [°C]	-40...85
--------------------------	----------

KT5013



Capacitive touch sensor

KTRSHOK-RBPKG/AM/AS/0,3M

Protection	IP 67; IP 69K; (on the front)
------------	-------------------------------

Tests / approvals

MTTF	[years]	490.4
------	---------	-------

Mechanical data

Weight	[g]	113.5
Housing		tubular
Dimensions	[mm]	Ø 96.9 / L = 11
Material		actuating surface: PA Grilamid TR 90UV transparent; housing: PC/ABS black

Displays / operating elements

Display	Switching status	8 x LED, red
	Power	8 x LED, green

Accessories

Accessories (optional)	surround in different colors
------------------------	------------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Cable: 0.3 m, PUR

Connector: 1 x M8; coding: A; Contacts: 4



Connection

