


LDH110



Oil humidity sensor

OIL HUMIDITY SENSOR ANALOG

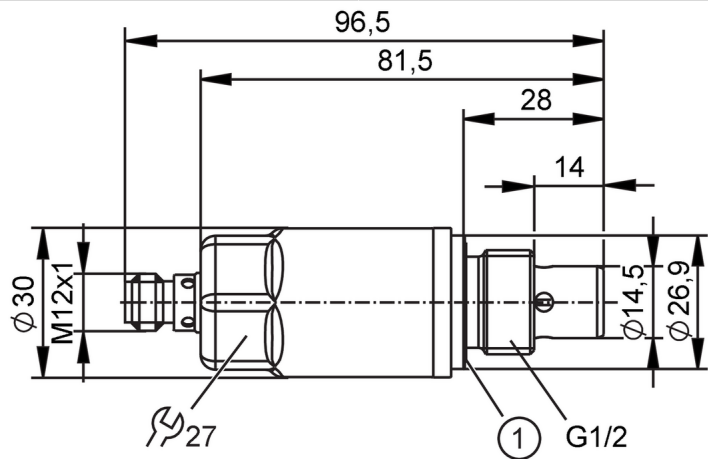

1 sealing



Product characteristics

Number of inputs and outputs	Number of analog outputs: 2
Process connection	threaded connection G 1/2

Application

Special feature	gold-plated contacts
Media	mineral oils; synthetic esters; biodegradable oils
Cannot be used for	See operating instructions, chapter "Intended use".
Medium temperature [°C]	-40...120
Pressure rating	50 bar 5 MPa
Vacuum resistance [mbar]	-1000

Electrical data

Operating voltage [V]	9...33 DC
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	2
Max. current load total [A]	0.085

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 2
------------------------------	-----------------------------

Outputs

Total number of outputs	2
Output signal	analog signal
Output function	analog output humidity / temperature
Number of analog outputs	2
Analog current output [mA]	4...20
Max. load [Ω]	(UB - 5V) * 50

Measuring/setting range

Measuring range [% RH]	0...100
------------------------	---------

LDH110



Oil humidity sensor

OIL HUMIDITY SENSOR ANALOG

Temperature measurement		
Measuring range	[°C]	-40...120
Accuracy / deviations		
Accuracy		± 3%; (± 5 % in the range < 10 %, > 90 %)
Repeatability		± 0,5 %
Resolution	[%]	12 Bit
Temperature measurement		
Accuracy	[K]	± 1
Repeatability	[K]	± 0,5
Resolution	[%]	12 Bit process value
Reaction times		
Response time	[s]	oil: T09 < 30
Temperature measurement		
Response time	[s]	oil: T09 < 30
Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	100
Protection		IP 68; IP 69K; (7 days / 3 m water depth / 0.3 bar: IP 68)
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	284
UL approval	File number UL	E364788
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	118.5
Material	stainless steel (1.4404 / 316L); PEI; sealing: FKM	
Materials (wetted parts)	stainless steel (1.4404 / 316L); PA6 GF50; epoxy resin; sealing: NBR	
Process connection	threaded connection G 1/2	
Remarks		
Remarks	Accuracy values expressed in percent refer to the measuring span	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: 4, gold-plated		
		


LDH110



Oil humidity sensor

OIL HUMIDITY SENSOR ANALOG

Connection

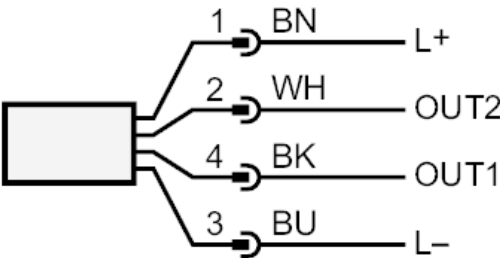

OUT1	analog output temperature
OUT2	analog output humidity
	Colors to DIN EN 60947-5-2
BK=	black
BN=	brown
BU=	blue
WH=	white