


LDH112



Oil humidity sensor

OIL HUMIDITY SENSOR IO-LINK

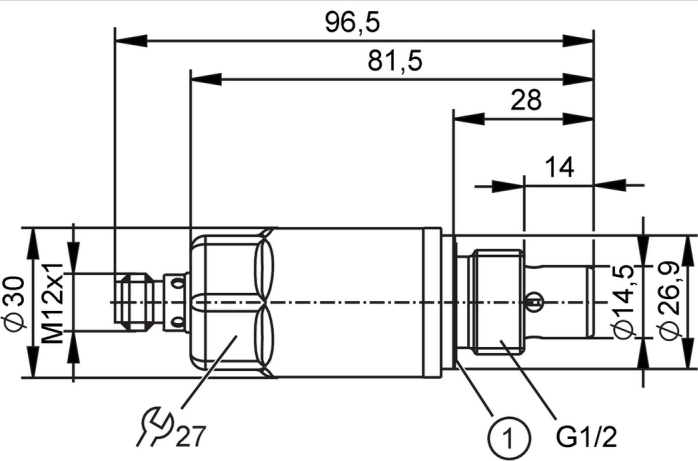

1 sealing



Product characteristics		
Number of inputs and outputs	Number of digital outputs: 1	
Process connection	threaded connection G 1/2	
Application		
Special feature	gold-plated contacts	
Media	mineral oils; synthetic esters; biodegradable oils	
Cannot be used for	See operating instructions, chapter "Intended use".	
Medium temperature [°C]	-40...120	
Pressure rating	50 bar	5 MPa
Vacuum resistance [mbar]	-1000	
Electrical data		
Operating voltage [V]	18...30 DC	
Current consumption [mA]	< 50	
Protection class	III	
Reverse polarity protection	yes	
Power-on delay time [s]	2	
Max. current load total [A]	0.065	
Inputs / outputs		
Number of inputs and outputs	Number of digital outputs: 1	
Outputs		
Total number of outputs	1	
Output signal	IO-Link	
Number of digital outputs	1	
Measuring/setting range		
Measuring range [% RH]	0...100	
Temperature measurement		
Measuring range [°C]	-40...120	

LDH112



Oil humidity sensor

OIL HUMIDITY SENSOR IO-LINK

Accuracy / deviations		
Accuracy		± 3; (± 5 % in the range < 10 %, > 90 %)
Repeatability		± 0,5 %
Resolution	[%]	0,1; (process value)
Temperature measurement		
Accuracy	[K]	± 1
Repeatability	[K]	± 0,5
Resolution	[K]	0.1
Reaction times		
Response time	[s]	oil: T09 < 30
Temperature measurement		
Response time	[s]	oil: T09 < 30
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Common - I&D	Identification and Diagnosis
	Function	Measurement data, standard resolution
SIO mode	no	
Required master port class	A	
Process data analog	5	
Min. process cycle time	[ms]	4.5
Supported DeviceIDs	Type of operation	DeviceID
	default	1249
Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	100
Protection	IP 68; IP 69K; (7 days / 3 m water depth / 0.3 bar: IP 68)	
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	284
UL approval	File number UL	E364788
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	119.55
Material	stainless steel (1.4404 / 316L); PEI; sealing: FKM	
Materials (wetted parts)	stainless steel (1.4404 / 316L); PA6 GF50; epoxy resin; sealing: NBR	
Process connection	threaded connection G 1/2	

LDH112



Oil humidity sensor

OIL HUMIDITY SENSOR IO-LINK


Remarks	
Remarks	Accuracy values expressed in percent refer to the measuring span
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: gold-plated



Connection

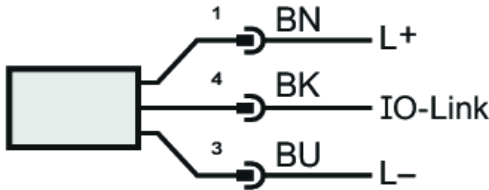

	Colors to DIN EN 60947-5-2
BK=	black
BN=	brown
BU=	blue