


LDL201



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V 077

Digital meets analog: integrating modern IO-Link sensors the analog way. The EIO104 allows you to realize two analog signals from intelligent IO-Link sensors with several process values.

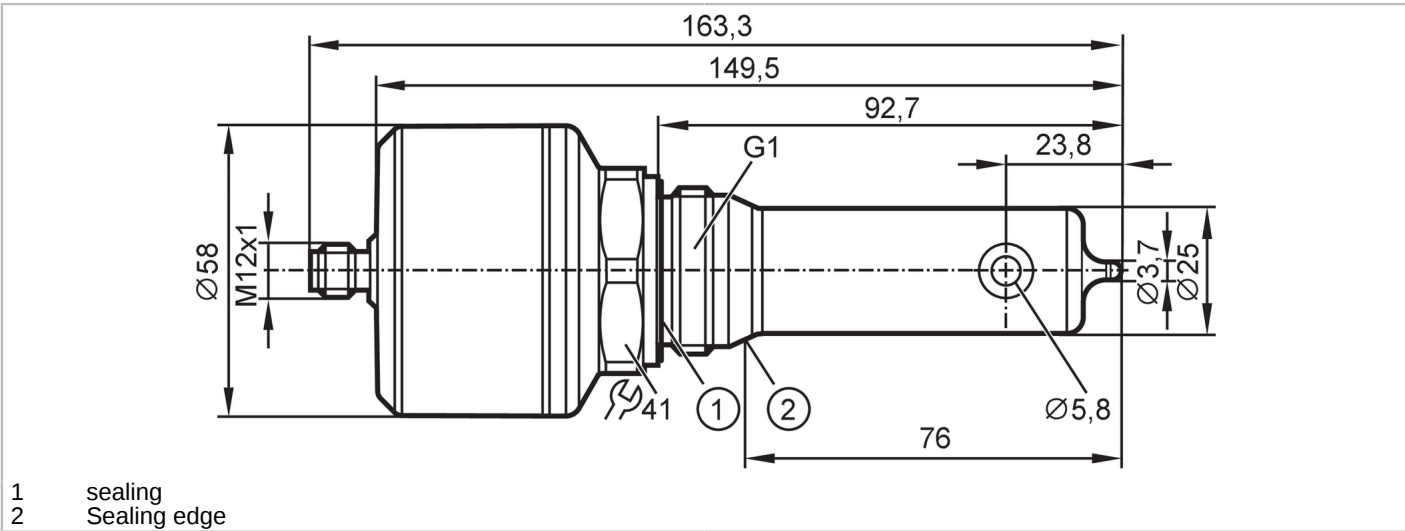

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1
Process connection	G 1 external thread Aseptoflex Vario

Application

Special feature	gold-plated contacts
Media	Conductive liquids
Note on media	water
	milk
	CIP liquids
Cannot be used for	See the operating instructions, chapter "Function and features".
Medium temperature [°C]	-25...100; (< 1 h: 150)
Pressure rating	16 bar 1.6 MPa
Vacuum resistance [mbar]	-1000
MAWP (for applications according to CRN)	14 bar 1.4 MPa

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 100
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	2
Measuring principle	inductive

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1
------------------------------	-----------------------------

Outputs

Total number of outputs	1
-------------------------	---



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V 077

Output signal	analog signal; IO-Link
Output function	analog output scalable; selectable conductivity / temperature
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	500

Measuring/setting range

Conductivity measurement			
Measuring range	[μS/cm]	100...1000000	
Resolution	[μS/cm]	0...10.000	1
		10.000...100.000	10
		100.000...1.000.000	100
Temperature measurement			
Measuring range	[°C]	-25...150	

Accuracy / deviations

Conductivity measurement	
Accuracy (in the measuring range)	2 % MW $\pm$ 25 $\mu\text{S/cm}$
Drift [%/K]	0,1 %/K MW $\pm$ 25 $\mu\text{S/cm}$
Repeatability	1 % MW $\pm$ 25 $\mu\text{S/cm}$
Long-term stability	0,5 % MW $\pm$ 25 $\mu\text{S/cm}$
Temperature measurement	
Accuracy [K]	20...50 $^{\circ}\text{C}$: $< \pm 0,2 \text{ K}$; -25...150 $^{\circ}\text{C}$: $< \pm 1,5 \text{ K}$
Repeatability [K]	0,2
Resolution [K]	0.1

Reaction times

Conductivity measurement	
Response time [s]	< 2 ; (T09; Damping = 0)
Temperature measurement	
Response time [s]	< 25 ; (T09)

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 3.1	Measuring Sensor
	Common - I&D	Identification and Diagnosis
SIO mode	no	
Required master port class	A	
Process data analog	1	
Min. process cycle time [ms]	6.4	
Supported DeviceIDs	Type of operation	DeviceID
	default	922

LDL201



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V 077

Operating conditions		
Ambient temperature	[°C]	-40...60
Storage temperature	[°C]	-40...85
Protection		IP 68; IP 69K; (7 days / 3 m water depth / 0.3 bar: IP 68)
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	in a closed metal tank
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	129
UL approval	File number UL	E364788
Mechanical data		
Weight	[g]	749.7
Material		stainless steel (1.4404 / 316L); PEEK; PEI; FKM
Materials (wetted parts)		PEEK
Process connection		G 1 external thread Aseptoflex Vario
Surface characteristics Ra/Rz of the wetted parts		Ra ≤ 0.8 µm
Remarks		
Remarks		MW = Measured value
Notes		Digital meets analog: integrating modern IO-Link sensors the analog way. The EIO104 allows you to realize two analog signals from intelligent IO-Link sensors with several process values.
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: 4, gold-plated		


LDL201



Inductive conductivity sensor

IND CONDUCTIVITY HYG ASF-V 077

Connection

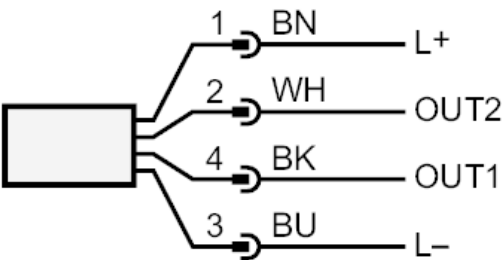

OUT1	IO-Link
OUT2	analog output
	Colors to DIN EN 60947-5-2
	Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white