




Conductive conductivity sensor

COND CONDUCTIVITY UPW 1/2NPT

Digital meets analog: integrating modern IO-Link sensors the analog way. The EIO104 allows you to realize two analog signals from intelligent IO-Link sensors with several process values.

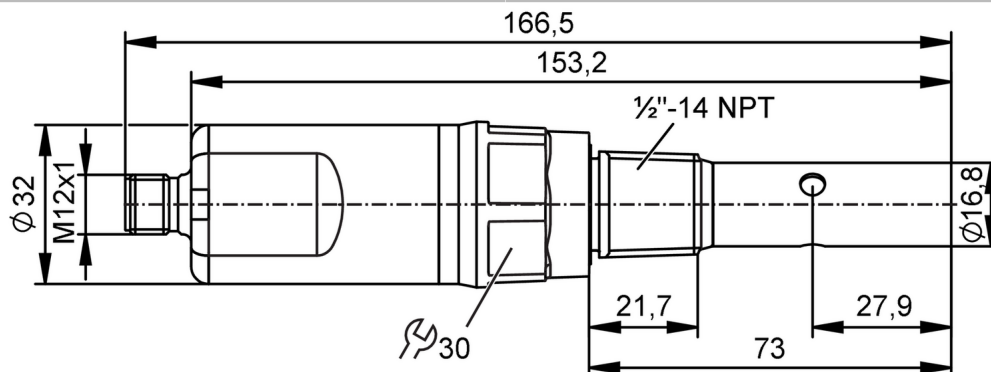

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1
Process connection	threaded connection 1/2" NPT external thread

Application

Special feature	gold-plated contacts
Media	Conductive liquids
Note on media	ultra-pure water
Cannot be used for	See the operating instructions, chapter "Function and features".
Medium temperature [°C]	-25...80
Pressure rating	16 bar 1.6 MPa
Note on pressure rating	at max. +80 °C
Vacuum resistance	-1000 mbar -0.1 MPa

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 60
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	2
Measuring principle	konduktiv

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1
------------------------------	-----------------------------

Outputs

Total number of outputs	1
Output signal	analog signal; IO-Link
Output function	analog output scalable; selectable conductivity / specific resistance / temperature
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	500



Conductive conductivity sensor

COND CONDUCTIVITY UPW 1/2NPT

Measuring/setting range		
Conductivity measurement		
Measuring range	[μS/cm]	0.04...1000
Spezifischer Widerstand		
Measuring range	[MΩ·cm]	0.001...25
Temperature measurement		
Measuring range	[°C]	-25...90
Accuracy / deviations		
Conductivity measurement		
Accuracy (in the measuring range)		3 % MW ± 0,00005 μS/cm
Drift	[%/K]	0,1 %/K; (referred to the ambient / electronics temperature)
Repeatability		1 % MW ± 0,00002 μS/cm
Long-term stability		1,5 % MW ± 0,00002 μS/cm
Spezifischer Widerstand		
Accuracy (in the measuring range)		depends on the accuracy of the conductivity measurement
Temperature measurement		
Accuracy	[K]	-25...90 °C: < ± 0,5 K / @ 25 °C: < ± 0,015 K
Repeatability	[K]	0,2
Resolution	[K]	0.1
Reaction times		
Conductivity measurement		
Response time	[s]	< 2; (T09; Damping = 0); conductivity <1 μS/cm: <5 s; (T09; Damping = 0)
Spezifischer Widerstand		
Response time	[s]	>1 MΩcm: <5 s (T09; Dämpfung = 0)
Temperature measurement		
Response time	[s]	< 9; (T09)
Interfaces		
Communication interface		IO-Link
IO-Link revision		1.1
SDCI standard		IEC 61131-9
SIO mode		no
Required master port class		A
Supported DeviceIDs	Type of operation	DeviceID
	default	1491
Operating conditions		
Ambient temperature	[°C]	-25...50
Storage temperature	[°C]	-25...75
Protection		IP 68; IP 69; (7 days / 3 m water depth / 0.3 bar: IP 68; DIN EN 60529)
Tests / approvals		
EMC	DIN EN 61326-1	group 1: class B
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)

LDL321



Conductive conductivity sensor

COND CONDUCTIVITY UPW 1/2NPT

Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]		181

Mechanical data		
Weight [g]		291.4
Housing		tubular
Dimensions [mm]		Ø 32 / L = 166.5
Material		housing: PP fiber-reinforced; process connection: PVDF; probe: stainless steel (1.4435 / 316L); insulator: PEEK; sealing: FKM
Materials (wetted parts)		housing: PP fiber-reinforced; process connection: PVDF; probe: stainless steel (1.4435 / 316L); insulator: PEEK; sealing: FKM
Tightening torque [Nm]		< 8
Process connection		threaded connection 1/2" NPT external thread


Remarks		
Remarks		MW = Measured value
Notes		Digital meets analog: integrating modern IO-Link sensors the analog way. The EIO104 allows you to realize two analog signals from intelligent IO-Link sensors with several process values.
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: 4, gold-plated



Connection

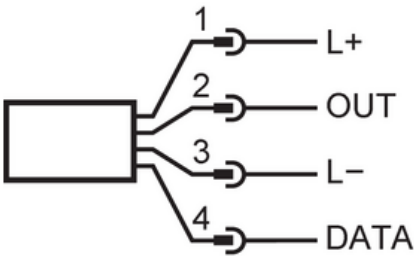

1	L +	
2	OUT	AO
3	L -	
4	DATA	IO-Link

AO: analog output