


LR7300



Continuous level sensor (guided wave radar)

LR0000B-BN34AQPKG/US

Please see the technical note under "Downloads"
For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.

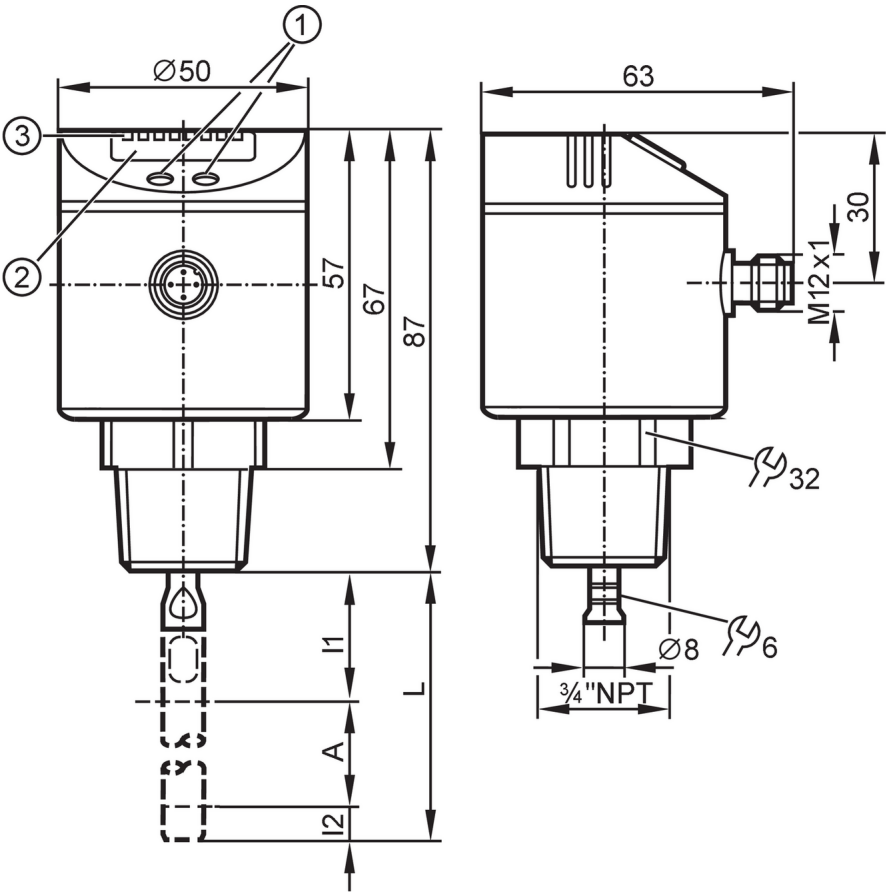

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / Switching status
- 3 Programming buttons
- A Active zone
- I1 / I2 Inactive ranges



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2
Probe length L [mm]	100...1600
Process connection	threaded connection 3/4" NPT external thread

Application

Special feature	gold-plated contacts
Application	for industrial applications
Media	Liquids
Dielectric constant of the medium	≥ 5
Recommended media	water; water-based media
Cannot be used for	See the operating instructions, chapter "Function and features".
Process temperature [°C]	-25...80; (90 < 1 h ; see note under remarks)

LR7300



Continuous level sensor (guided wave radar)

LR0000B-BN34AQPKG/US

Pressure rating	16 bar	1.6 MPa
Vacuum resistance	-1000 mbar	-0.1 MPa
MAWP (for applications according to CRN) [bar]	16	

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 30
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 3
Measuring principle	guided wave radar

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2
------------------------------	------------------------------

Outputs

Total number of outputs	2
Output signal	switching signal; IO-Link
Electrical design	PNP
Number of digital outputs	2
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Short-circuit protection	yes
Type of short-circuit protection	thermal, pulsed
Overload protection	yes

Measuring/setting range

Probe length L [mm]	100...1600
Active range A [mm]	L-40
Inactive range I1 / I2 [mm]	30 / 10
Sampling rate [Hz]	4

Setting range

Set point SP [mm]	15...L-30
Reset point rP [mm]	10... L-35
In steps of [mm]	5
Hysteresis [mm]	> 5

Accuracy / deviations

Repeatability [mm]	± 5
Measuring error [mm]	± 7
Offset error [mm]	5
Resolution [mm]	1
Temperature drift per 10 K	± 0.2 %

Interfaces

Communication interface	IO-Link
-------------------------	---------

LR7300



Continuous level sensor (guided wave radar)

LR0000B-BN34AQPKG/US

Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
SIO mode	yes	
Required master port class	A	
Process data analog	1	
Process data binary	2	
Min. process cycle time [ms]	2.3	
Supported DeviceIDs	Type of operation	DeviceID
	default	9

Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-40...85	
Protection	IP 67	

Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	in a closed metal tank
	DIN EN 61000-6-4	in plastic or open metal tanks
Shock resistance	DIN EN 60068-2-27	50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz) / 1 g (5...200 Hz) with reference rod 0.5 m
MTTF [years]	233	
UL approval	UL approval number	H007
	File number UL	E174191

Mechanical data		
Weight [g]	397.25	
Material	stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); FKM; PBT; PC; PEI; TPE-V	
Materials (wetted parts)	stainless steel (1.4305 / 303); probe connection: stainless steel (1.4435 / 316L); PTFE; FKM	
Process connection	threaded connection 3/4" NPT external thread	

Displays / operating elements		
Display	Display unit	3 x LED, green
	Switching status	2 x LED, yellow
	Level	alphanumeric display, 4-digit
	Parameter setting	alphanumeric display, 4-digit

Remarks		
Notes	Please see the technical note under "Downloads"; For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.	
Pack quantity	1 pcs.	

Electrical connection		
Connector: 1 x M12; coding: A; Contacts: 4, gold-plated		
		


LR7300



Continuous level sensor (guided wave radar)

LR0000B-BN34AQPKG/US

Connection

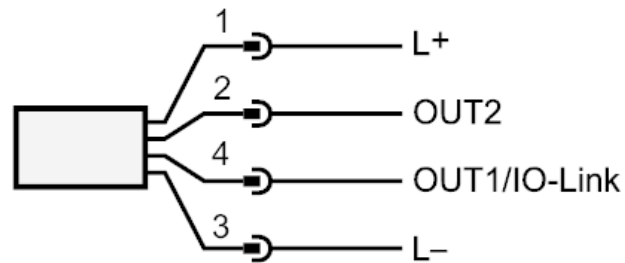

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

