

LR8320




Continuous level sensor (guided wave radar)

LR0000--BN34ASPKG/US

For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.

For 8-wire cordsets the core colors are not standardized.
Please note the wiring of the sensor and the cordsets (see data sheet).
Please see the technical note under "Downloads"

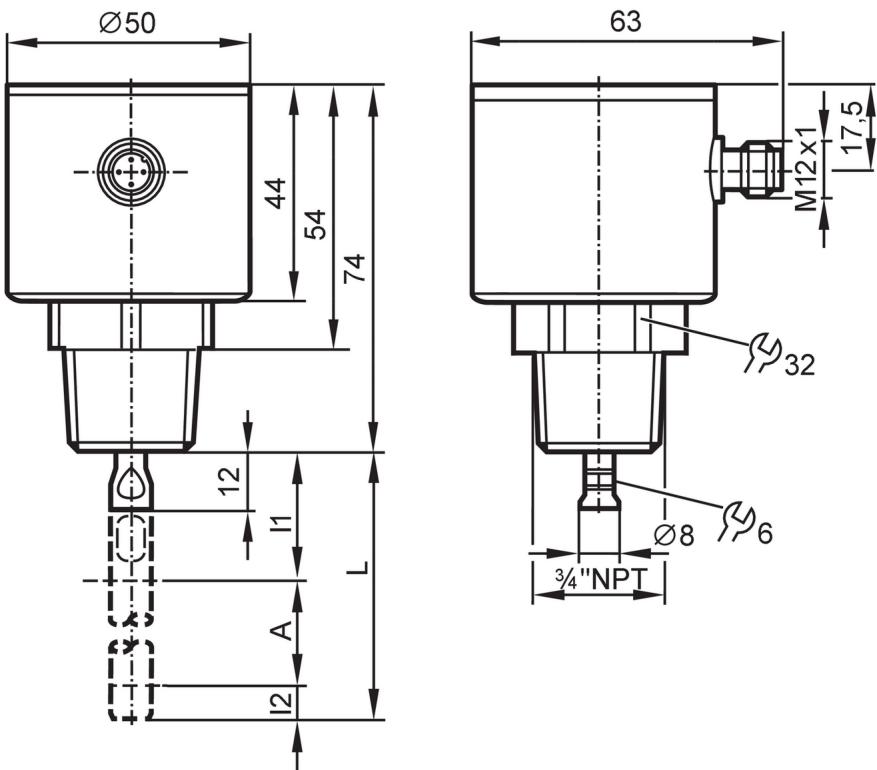

A Active zone
I1 / I2 Inactive ranges



Product characteristics	
Number of inputs and outputs	Number of digital outputs: 4
Probe length L [mm]	100...2000
Process connection	threaded connection 3/4" NPT external thread
Application	
Special feature	gold-plated contacts
Application	for industrial applications
Media	Liquids
Dielectric constant of the medium	> 5
Recommended media	water; water-based media

LR8320



Continuous level sensor (guided wave radar)

LR0000--BN34ASPKG/US

Process temperature	[°C]	-25...80; (90 < 1 h ; see note under remarks)	
Pressure rating		16 bar	1.6 MPa
Vacuum resistance		-1000 mbar	-0.1 MPa

Electrical data

Operating voltage	[V]	18...30 DC	
Current consumption	[mA]	< 25	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	< 3	
Measuring principle		guided wave radar	

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 4		
------------------------------	------------------------------	--	--

Outputs

Total number of outputs		4	
Output signal		switching signal; IO-Link	
Electrical design		PNP/NPN	
Number of digital outputs		4	
Output function		normally open / closed; (configurable)	
Max. voltage drop switching output DC	[V]	2.5	
Permanent current rating of switching output DC	[mA]	200	
Short-circuit protection		yes	
Type of short-circuit protection		yes (non-latching)	
Overload protection		yes	

Measuring/setting range

Probe length L	[mm]	100...2000	
Active range A	[mm]	L-40	
Inactive range I1 / I2	[mm]	30 / 10	
Sampling rate	[Hz]	4	

Setting range

Set point SP	[mm]	15...L-30	
Reset point rP	[mm]	10... L-35	
In steps of	[mm]	5	
Hysteresis	[mm]	> 5	

Accuracy / deviations

Repeatability	[mm]	5	
Measuring error	[mm]	± 7	
Offset error	[mm]	5	
Resolution	[mm]	1	
Temperature drift per 10 K		± 0.2 %	

Interfaces

Communication interface	IO-Link		
-------------------------	---------	--	--

LR8320



Continuous level sensor (guided wave radar)

LR0000--BN34ASPKG/US

Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 3.1	Measuring Sensor
	Common - I&D	Identification and Diagnosis
SIO mode	yes	
Required master port class	A	
Process data analog	3	
Process data binary	4	
Min. process cycle time [ms]	3.2	
Supported DeviceIDs	Type of operation	DeviceID
	default	980

Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-40...85	
Protection	IP 68; IP 69K; (7 days / 1 m water depth / 0.1 bar: IP 68)	


Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	: in a closed metal tank
	DIN EN 61000-6-4	: in plastic or open metal tanks
Shock resistance	DIN EN 60068-2-27	50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz) / 1 g (5...200 Hz) with reference rod 0.5 m
MTTF [years]	242	
UL approval	UL approval number	H011
	File number UL	E174191

Mechanical data		
Weight [g]	444.8	
Material	stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); FKM; PEI	
Materials (wetted parts)	stainless steel (1.4305 / 303); probe connection: stainless steel (1.4435 / 316L); PTFE; FKM	
Process connection	threaded connection 3/4" NPT external thread	

Remarks		
Notes	For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.	
Pack quantity	1 pcs.	

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 7, gold-plated






Continuous level sensor (guided wave radar)

LR0000--BN34ASPKG/US

Connection

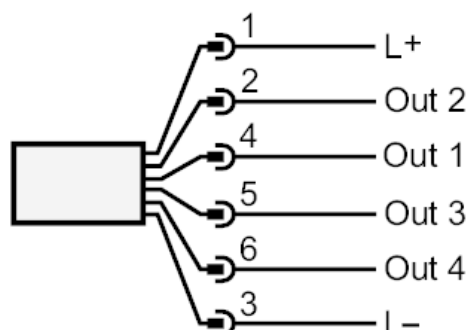

OUT1 : switching output or IO-Link
OUT2...4 : Switching output

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

