


M9H202



Cylinder sensor

M9B3002BBPKG/B/AM/500/1M/AMP

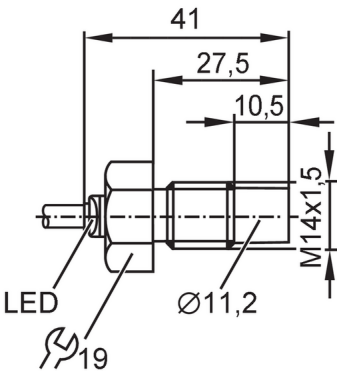

Product characteristics		
Electrical design	PNP	
Output function	normally open	
Sensing range	[mm]	2
Housing	Threaded type	
Dimensions	[mm]	M14 x 1.5 / L = 41
Application		
Special feature	Full-metal housing	
Application	Detects ferrous metals; Hydraulic cylinder	
Min. burst pressure	2000 bar	200 MPa
Pressure rating	500 bar	50 MPa
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 23
Protection class	III	
Reverse polarity protection	yes	
Outputs		
Electrical design	PNP	
Output function	normally open	
Max. voltage drop switching output DC	[V]	1.6
Max. leakage current	[mA]	0.1
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection	yes	
Overload protection	yes	
Monitoring range		
Sensing range	[mm]	2
Accuracy / deviations		
Hysteresis	[% of Sr]	< 15
Switch-point drift	[% of Sr]	10

M9H202



Cylinder sensor

M9B3002BBPKG/B/AM/500/1M/AMP

Repeatability	[% of Sr]	10	
Operating conditions			
Pressure peak		1000 bar	100 MPa
Ambient temperature	[°C]	-25...85	
Protection		IP 65; IP 68; IP 69K	
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-6 HF conducted	10 V
		EN 55011	class B
		DIN ISO 11452-5	100 V/m
Vibration resistance		EN 60068-2-6 Fc	20 g 50 sweep cycles per frequency; 1 octave per minute in 3 axes / 10...3000 Hz -20...50 °C
Shock resistance		EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes / -25...85 °C
Continuous shock resistance		EN 60068-2-27 Ea	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes / -20...50 °C
MTTF	[years]	925	
Mechanical data			
Weight	[g]	81.6	
Housing		Threaded type	
Mounting		flush mountable	
Dimensions	[mm]	M14 x 1.5 / L = 41	
Thread designation		M14 x 1.5	
Material		housing: stainless steel stainless steel (1.4404 / 316L); O-ring: FKM	
Tightening torque	[Nm]	< 25	
Full-metal housing		yes	
Displays / operating elements			
Display		Switching status	1 x LED, yellow
Remarks			
Pack quantity		1 pcs.	

M9H202



Cylinder sensor

M9B3002BBPKG/B/AM/500/1M/AMP

Electrical connection

Cable: 1 m, PUR; 3 x 0.34 mm²

Connection



Core colors :
BK = black
BN = brown
BU = blue

Connector: 1 x AMP ((282105-1))

Diagrams and graphs

