


MFH211



Cylinder sensor

MFH3002BBPKG/B/500/0,12M/ZH/DT

customer-specific

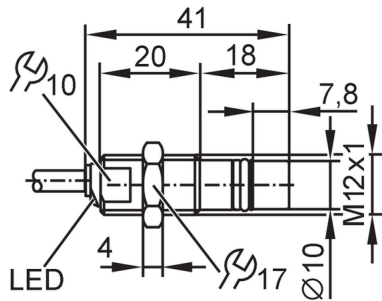

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	1.8
Housing	Threaded type
Dimensions [mm]	M12 x 1 / L = 41

Application

Special feature	Full-metal housing	
Application	Detects ferrous metals; Hydraulic cylinder	
Min. burst pressure	2000 bar	200 MPa
Pressure rating	500 bar	50 MPa

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 23
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	1.6
Max. leakage current [mA]	0.1
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	1.8
--------------------	-----

Accuracy / deviations

Hysteresis [% of Sr]	< 15
----------------------	------

MFH211



Cylinder sensor

MFB3002BBPKG/B/500/0,12M/ZH/DT

Switch-point drift	[% of Sr]	10
Repeatability	[% of Sr]	10

Operating conditions		
Pressure peak	1000 bar	100 MPa
Ambient temperature	[°C]	-25...85
Protection	IP 65; IP 68; IP 69K	

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
	DIN ISO 11452-5	100 V/m
Vibration resistance	EN 60068-2-6 Fc	20 g 50 sweep cycles per frequency; 1 octave per minute in 3 axes / 10...3000 Hz -20...50 °C
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes / -40...85 °C
Continuous shock resistance	EN 60068-2-27 Ea	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes / -20...50 °C

Mechanical data		
Weight	[g]	47.3
Housing	Threaded type	
Mounting	flush mountable	
Dimensions	[mm]	M12 x 1 / L = 41
Thread designation	M12 x 1	
Material	housing: stainless steel; O-ring: FKM; supporting ring: PTFE	
Min. pressure cycles	10 million	
Tightening torque	[Nm]	< 25
Full-metal housing	yes	

Displays / operating elements		
Display	Switching status	1 x LED, yellow

Accessories	
Items supplied	lock nuts: 1 x M12

Remarks	
Notes	customer-specific
Pack quantity	1 pcs.

MFH211



Cylinder sensor


MFB3002BBPKG/B/500/0,12M/ZH/DT

Electrical connection


Cable: 0.125 m, PUR, Ø 4.9 mm; 3 x 0.5 mm²

Electrical connection - plug

Connector: 1 x DEUTSCH connector (DT04-3P-CE02); Contacts: 3; potted



Connection

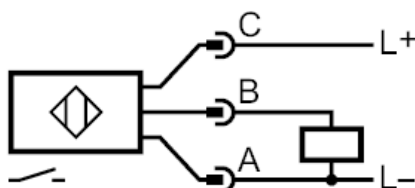

Diagrams and graphs

