


MGS213



Magnetic sensor

MGB3070-APKG/AM/G/ZH

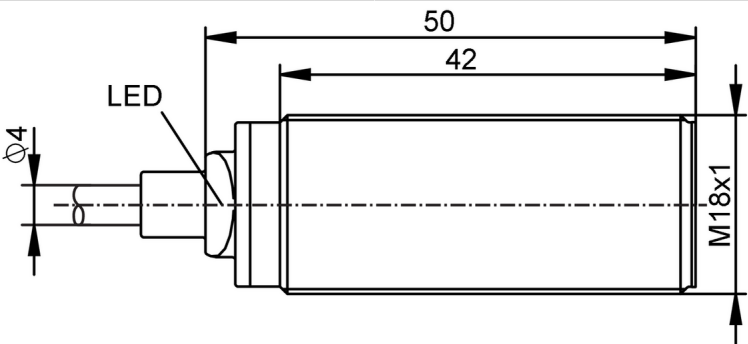

Product characteristics		
Electrical design		PNP
Output function		normally closed
Sensing range	[mm]	70; (referred to magnet M 4.0)
Housing		Threaded type
Dimensions	[mm]	M18 x 1 / L = 50
Application		
Special feature		Full-metal housing
Pressure rating	[bar]	20
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Rated insulation voltage	[V]	60
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	50
Outputs		
Electrical design		PNP
Output function		normally closed
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	5000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Sensing range	[mm]	70; (referred to magnet M 4.0)
Magnetic sensitivity	[mT]	0.8
Accuracy / deviations		
Hysteresis	[% of Sr]	1...10

MGS213



Magnetic sensor

MGB3070-APKG/AM/G/ZH

Switch-point drift	[% of Sr]	< 10
Repeatability	[% of Sr]	< 10

Operating conditions		
Ambient temperature	[°C]	-25...75
Protection		IP 67
Pollution degree		3

Tests / approvals		
EMC	EN 61000-4-2	4 kV CD / 8 kV AD
	EN 61000-4-3	10 V/m
	EN 61000-4-4	2 kV
	EN 61000-4-5	0,5 kV line to line, Ri: 2 Ohm
	EN 61000-4-6	10 V
	EN 55011	class B
	DIN ISO 11452-2	100 V/m
	EN 60068-2-6 Fc	20 g 50 sweep cycles per frequency; 1 octave per minute in 3 axes / 10...3000 Hz
Vibration resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Shock resistance	EN 60068-2-52 Kb	severity level 5 (4 test cycles)
Salt spray test		
MTTF	[years]	1445
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	UL approval number	C024
	File number UL	E174191

Mechanical data		
Weight	[g]	89.95
Housing		Threaded type
Dimensions	[mm]	M18 x 1 / L = 50
Thread designation		M18 x 1
Material		housing: stainless steel (316L / 1.4404); cable plug: PEI; lock nuts: brass
Full-metal housing		yes

Displays / operating elements		
Display	Switching status	1 x LED, yellow

Accessories		
Items supplied		lock nuts: 2

Remarks		
Remarks		voltage supply to EN50178, SELV, PELV
Pack quantity		1 pcs.

MGS213




Magnetic sensor

MGB3070-APKG/AM/G/ZH

Electrical connection

Cable: 2 m, PUR; 3 x 0.34 mm²

Connection

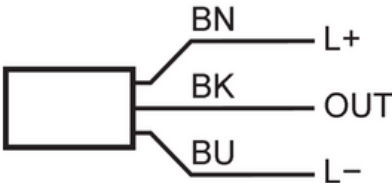

BN : brown
BK: black
BU: blue

BN: L+
BK: OUT DO (NC)
BU: L-