


MK5116



Cylinder sensor with GMR cell

MKT3028BBPKG/G/1,0M/ZH/US

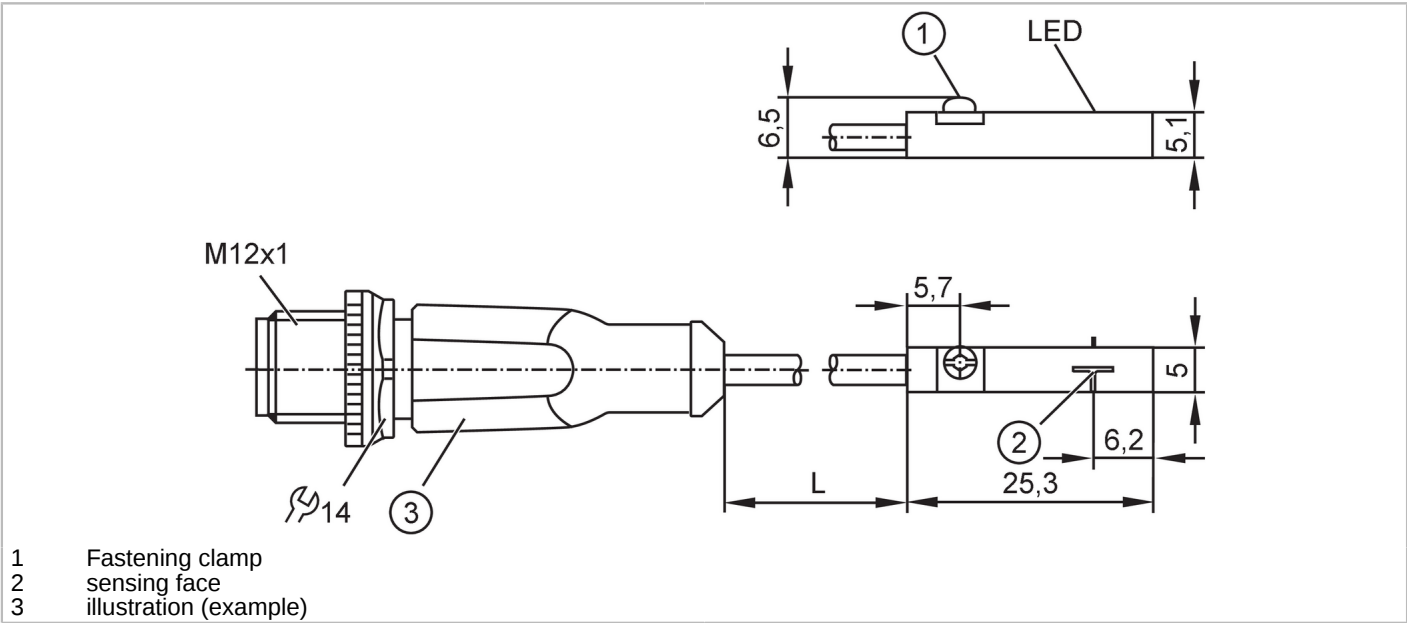

- 1 Fastening clamp
- 2 sensing face
- 3 illustration (example)



Product characteristics		
Electrical design		PNP
Output function		normally open
Dimensions	[mm]	25 x 5 x 6.5
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	30
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	10000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Magnetic sensitivity	[mT]	2.8
Travel speed	[m/s]	> 10
Accuracy / deviations		
Hysteresis	[mm]	< 1.5

MK5116



Cylinder sensor with GMR cell

MKT3028BBPKG/G/1,0M/ZH/US

Repeatability	[mm]	< 0.2	
Operating conditions			
Ambient temperature	[°C]	-25...85	
Protection		IP 65; IP 67	
Tests / approvals			
EMC	EN 61000-4-2 ESD	- CD / 8 kV AD	
	EN 61000-4-3 HF radiated	10 V/m	
	EN 61000-4-4 Burst	2 kV	
	EN 61000-4-6 HF conducted	10 V	
	EN 55011	class B	
MTTF	[years]	3694	
UL approval	Ta	-25...75 °C	
	Enclosure type	Type 1	
	voltage supply	Limited Voltage/Current (Marking Class 2)	
	UL approval number	C003	
	File number UL	E174191	
Mechanical data			
Weight	[g]	29.4	
Mounting		flush mountable	
Type of mounting		fastening clamp with combined slot / hexagon socket, width across flats 1.5	
Cylinder type		T-slot cylinders	
Dimensions	[mm]	25 x 5 x 6.5	
Material		housing: PA; Fastening clamp: stainless steel	
Displays / operating elements			
Display	Switching status	1 x LED, yellow	
Accessories			
Items supplied	rubber memory stop: 1		
	cable clip: 1		
Remarks			
Pack quantity	1 pcs.		
Electrical connection - plug			
Cable: 1 m, PUR; cross-linked			
Connector: 1 x M12; coding: A; Contacts: 4; Locking: Knurled nut, rotatable			
			

MK5116



Cylinder sensor with GMR cell

MKT3028BBPKG/G/1,0M/ZH/US

Connection

