

BAR LIGHT 10x150 IR/0,3M/US



ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — EN-US — O2D925-01 — 11.04.2017 — 

O2D925



External illumination

BAR LIGHT 10x150 IR/0,3M/US

Inputs

Trigger	24 V PNP
---------	----------

Operating conditions

Ambient temperature	[°C]	-10...55
Storage temperature	[°C]	-25...75
Protection		IP 65
Overheat protection		yes; (deactivation at 65...75 °C)

Tests / approvals

Photobiological safety	risk group 1; (DIN EN 62471:2008)
------------------------	-----------------------------------

Mechanical data

Weight	[g]	218.5
Dimensions	[mm]	200 x 13 x 18
Material		housing: aluminum black anodized
Lens material		Illuminated field:glass

Displays / operating elements

Display	Illumination status	1 x LED, yellow
	Power	1 x LED, green
	Excess temperature	1 x LED, red

Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection

Cable: 0.3 m, PUR, black; 4 x 0.34 mm²

Connector: 1 x M12; coding: A



Connection

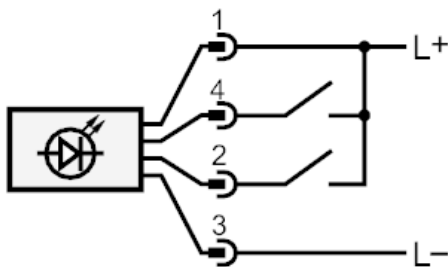

- 4 Trigger
2 operating mode "high light intensity"