




3D camera

O3RI00KG/2D3D/ZN/O/S/60

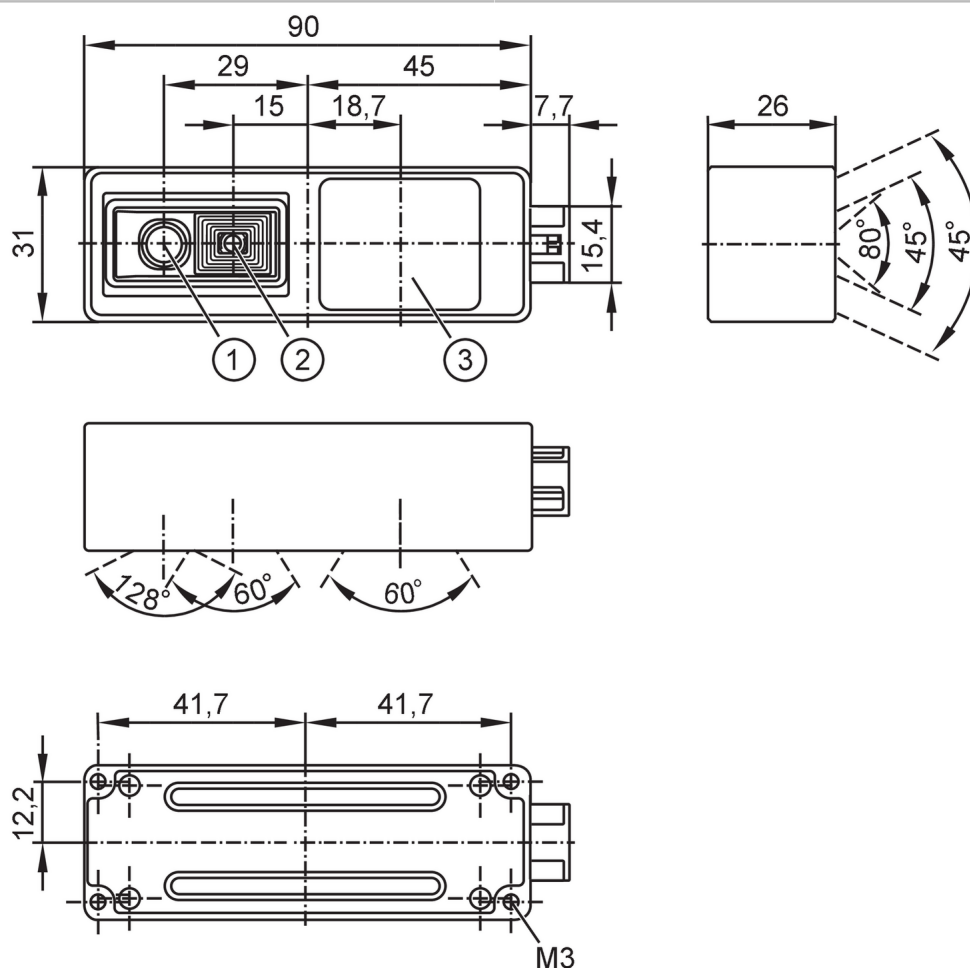

- 1 2D camera
- 2 3D sensor
- 3 Illumination unit



Product characteristics

Image resolution	[px]	1280 x 800
Image resolution 3D	[px]	224 x 172
Angle of aperture	[°]	128 x 80
Angle of aperture 3D	[°]	60 x 45
Image repetition frequency	[Hz]	20
Image repetition frequency 3D	[Hz]	20

Electrical data

Operating voltage	[V]	19.2...28.8 DC
Max. current consumption	[mA]	800
Power consumption	[W]	8.6; ((FPS x 0,32) + 2,2; FPS = Framerate Head)
Image sensor		PMD 3D ToF-Chip / 2D Chip
Integrated lighting		yes; (infrared: 940 nm invisible radiation)

Monitoring range

Image resolution	[px]	1280 x 800
------------------	------	------------



3D camera

O3RIOOKG/2D3D/ZN/O/S/60

Image resolution 3D	[px]	224 x 172
Angle of aperture	[°]	128 x 80
Angle of aperture 3D	[°]	60 x 45
Image repetition frequency	[Hz]	20
Image repetition frequency 3D	[Hz]	20

Interfaces

Transmission standard	FPD-Link
Type of connector	HFM (Mini-FAKRA)

Operating conditions

Ambient temperature	[°C]	-10...40
Storage temperature	[°C]	-40...85
Protection		IP 54

Tests / approvals

EMC	EN IEC 61000-6-4	radiation of interference / residential, commercial and light-industrial environments
	EN IEC 61000-6-2	noise immunity / industrial environments
Shock resistance	EN 60068-2-27	50 g / (11 ms) not repetitive
	EN 60068-2-27	40 g / (6 ms) repetitive
Vibration resistance	EN 60068-2-6	2 g / (10...150 Hz)
	EN 60068-2-64	2.3 g RMS / (10...500 Hz)
Laser protection class		1
Notes on laser protection	Caution:	invisible laser radiation
	laser class:	1
		IEC 60825-1:2014
		Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
Electrical safety	EN 61010-2-201	electrical supply only via PELV circuits
MTTF	[years]	42

Mechanical data

Weight	[g]	190.495
Dimensions	[mm]	90 x 31 x 26
Material		housing: diecast zinc coated; Cover: polycarbonate; window: glass / polycarbonate; rear of the housing: aluminum coated
Tightening torque	[Nm]	< 0.8

Accessories

Accessory required	Video Processing Unit 1 x, OVP810
	Video Processing Unit 1 x, OVP811
	Video Processing Unit 1 x, OVP812
	Video Processing Unit 1 x, OPP813
	only one of the listed video processing units is required; the required version depends on the respective application.

Remarks

Pack quantity	1 pcs.
---------------	--------

**3D camera**

O3RI00KG/2D3D/ZN/O/S/60

Electrical connection - 2D/3D camera

Connector: 1 x Dual-HFM (AMK142-1M4Z5-A)

Other data**Field of view size**

Measuring range / distance [m]	Length [m]	Width [m]
1.00	1.15	0.80
2.00	2.30	1.65
3.00	3.45	2.50
4.00	4.60	3.30
5.00	5.80	4.15
6.00	6.95	4.95
7.00	8.10	5.80

repeatability of the distance measurement of an individual pixel

Measuring range / distance [m]	repeatability of the measured distance values on grey objects (18% reflectivity) [mm]	Accuracy [mm]
	typical value	typical value
0...1	± 5	± 9
1...2	± 6	± 10
2...3	± 9	± 12
3...4	± 13	± 13
4...5	± 19	± 15
5...6	± 27	± 16
6...7	± 36	± 18

object in centre of the image

Ambient temperature

20° C

measured at a reflectivity of 18% to 90%

The repeatability can be optimized with filter functions

Temperature drift

Temperature range	-10...40 °C
Temperature drift [mm/K]	0.1