


O5H205



Diffuse reflection sensors with background suppression

O5H-DPKG/US100

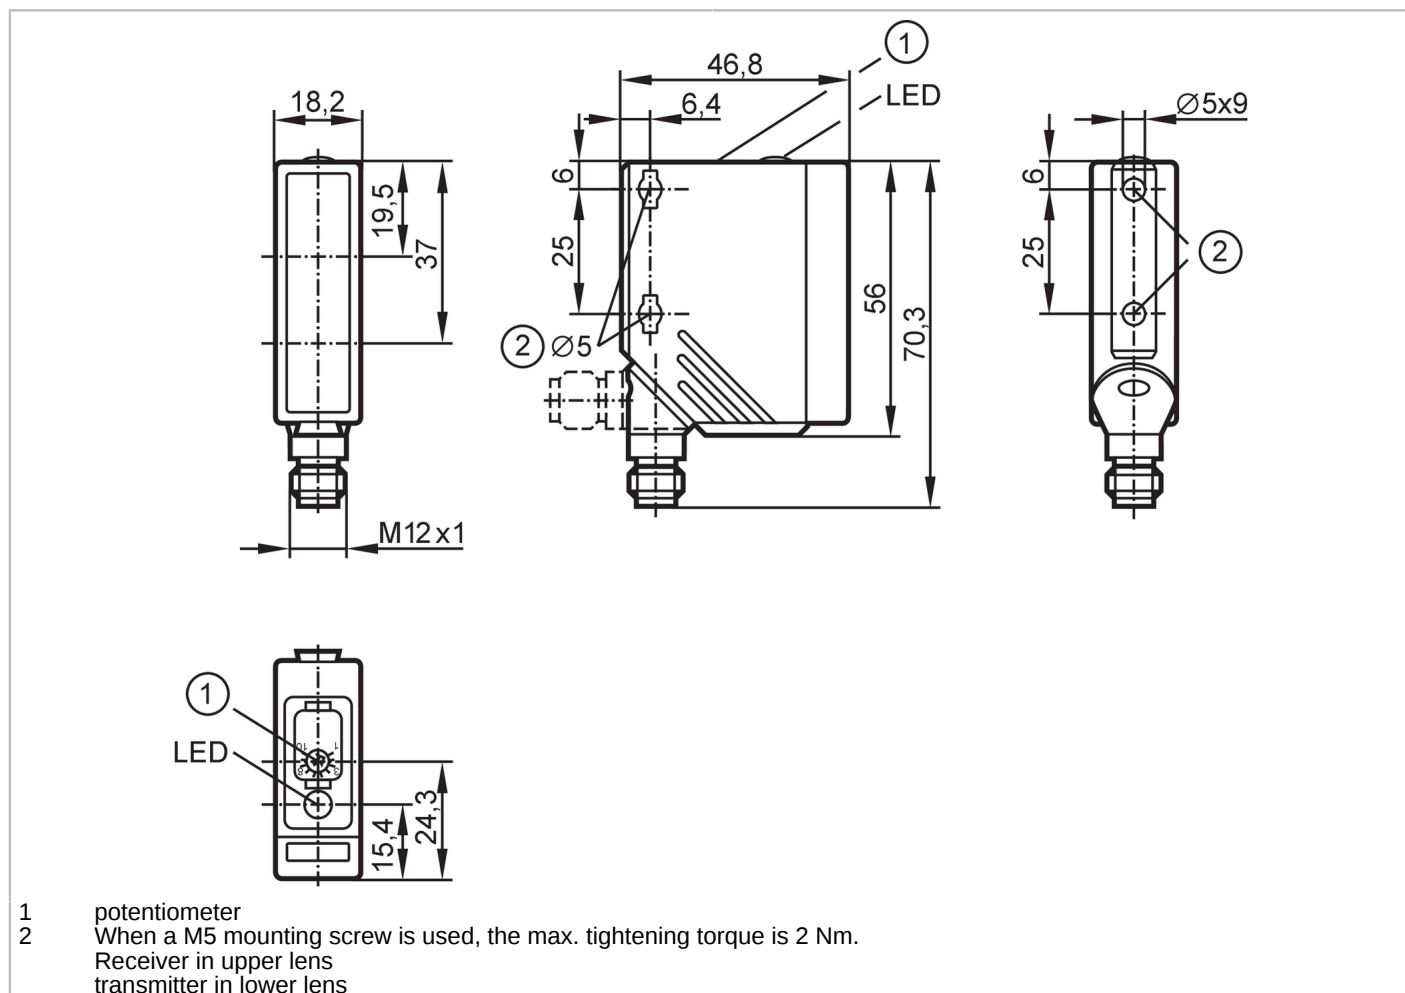

Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Special feature		Background suppression
Function principle		Diffuse reflection sensor
Application		Industrial applications
Electrical data		
Operating voltage	[V]	10...36 DC; (cULus - Class 2 source required)
Current consumption	[mA]	25
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Outputs		
Electrical design		PNP
Output function		dark-on mode



Diffuse reflection sensors with background suppression

O5H-DPKG/US100

Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range		
Range	[mm]	50...1400; (white paper 200 x 200 mm 90 % remission)
Range on white object (90 % remission)	[mm]	50...1400
Range on grey object (18 % remission)	[mm]	50...800
Range on black object (6 % remission)	[mm]	50...550
Range adjustable		yes
Max. light spot diameter	[mm]	50
Light spot dimensions refer to		Range
Background suppression available		yes

Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65

Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	331

Mechanical data		
Weight	[g]	63
Housing		rectangular
Dimensions	[mm]	56 x 18.2 x 46.8
Material		operator interface: TPE; housing: PA; Front framework: stainless steel
Lens material		front lens:PMMA
Lens alignment		Side sensing

Displays / operating elements		
Display	Switching status	1 x LED, yellow
Operating elements		potentiometer

Remarks		
Pack quantity		1 pcs.

Electrical connection		
-----------------------	--	--


Connector: 1 x M12; coding: A; Contacts: 4




Diffuse reflection sensors with background suppression

O5H-DPKG/US100

Connection

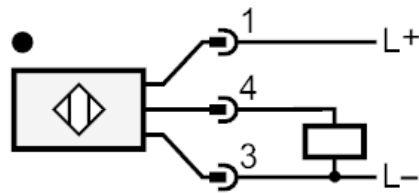

Diagrams and graphs

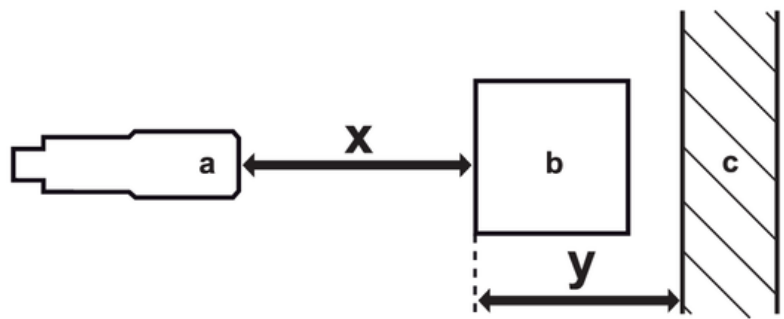


- a: sensor
- b: object
- c: background
- x: distance sensor/object [mm]
- y: min. distance object/background [mm]



Diffuse reflection sensors with background suppression

O5H-DPKG/US100

Background suppression chart

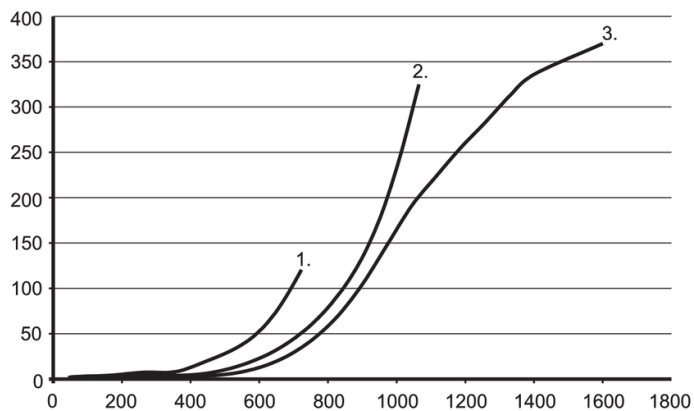

x: distance sensor/object [mm]

y: min. distance object/background [mm]

1 = object black (6 % remission) , Background white (90 % remission)

2 = object grey (18 % remission) , Background white (90 % remission)

3 = object white (90 % remission) , Background white (90 % remission)