


O5S501



Through-beam sensor transmitter

O5S-OOKG/2M

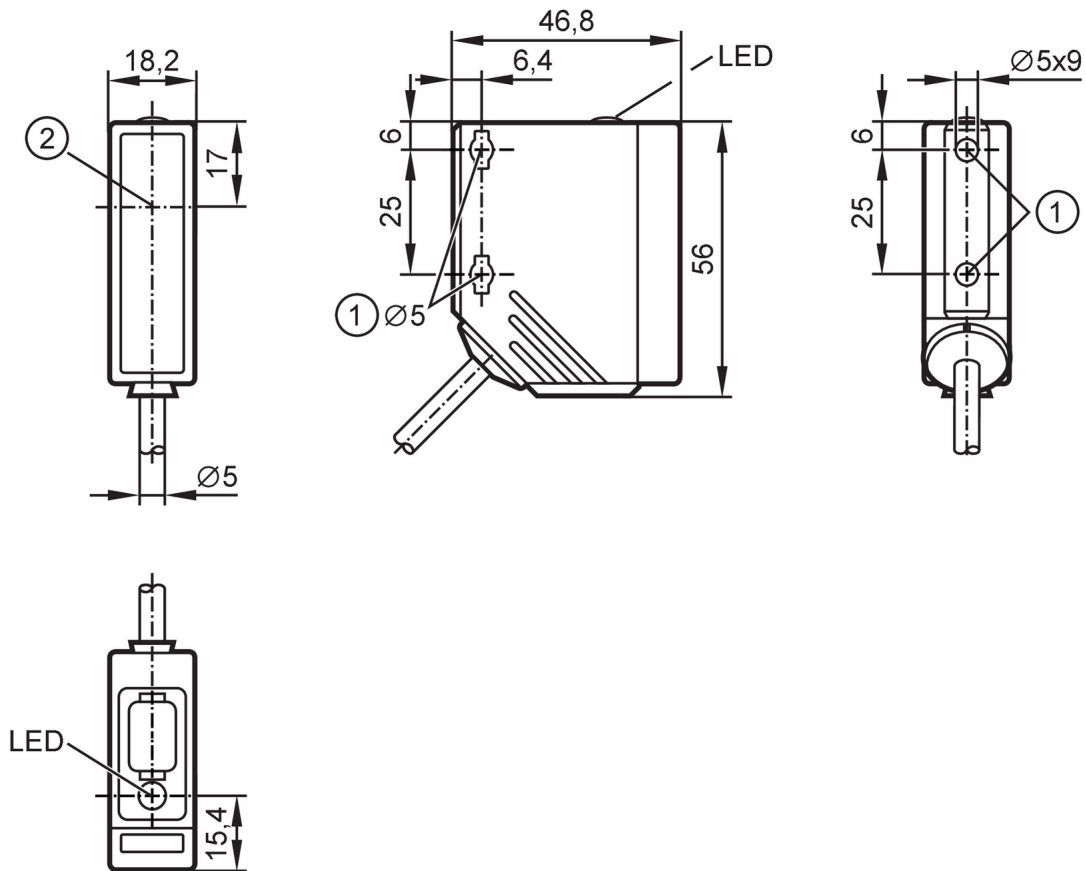

- 1 When a M5 mounting screw is used, the max. tightening torque is 2 Nm.
2 Sensing surface



Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Through-beam sensor
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	20
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

Monitoring range

Transmitter / receiver		transmitter
Range	[m]	< 25
Range adjustable		no
Max. light spot diameter	[mm]	625

O5S501



Through-beam sensor transmitter

O5S-00KG/2M

Light spot dimensions refer to _____ at maximum range _____

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	617

Mechanical data

Weight	[g]	109.45
Housing		rectangular
Dimensions	[mm]	56 x 18.2 x 46.8
Material		housing: PA; Front framework: stainless steel; operator interface: TPU (urethane)
Lens material		front lens:PMMA
Lens alignment		Side sensing

Displays / operating elements

Display	Power	1 x LED, green
---------	-------	----------------


Remarks

Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.

Electrical connection

Cable: 2 m, PUR; 3 x 0.34 mm²

Connection

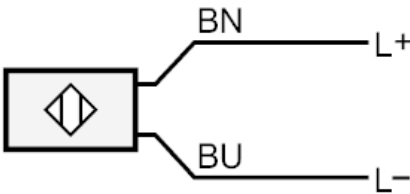

BN = Core colors : brown
BU = blue

O5S501



Through-beam sensor transmitter

O5S-OOKG/2M

Diagrams and graphs

excess gain graph

