


O6S301



Through-beam sensor transmitter

O6S-OOKG/0,30m/US

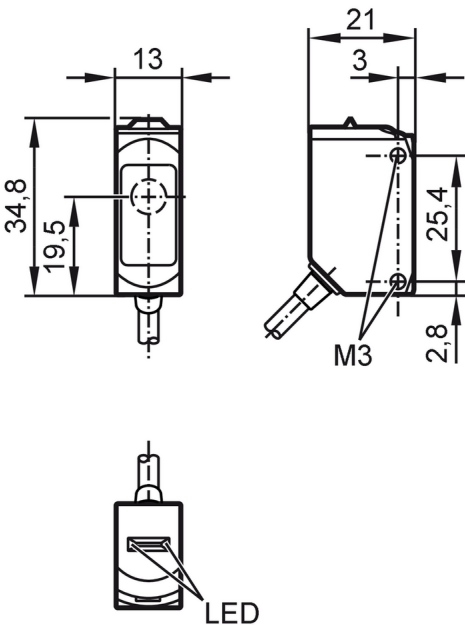

Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Function principle		Through-beam sensor
Application		food and beverage industry
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	11; ((24 V))
Protection class		III
Type of light		red light
Wave length	[nm]	633
Monitoring range		
Transmitter / receiver		transmitter
Range	[m]	< 10
Max. light spot diameter	[mm]	300
Light spot dimensions refer to		at maximum range
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65; IP 67; IP 68; IP 69K
Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	2600

O6S301



Through-beam sensor transmitter

O6S-OOKG/0,30m/US

UL approval	Ta	-25...40 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	UL approval number	E005

Mechanical data		
Weight	[g]	50.5
Housing		rectangular
Dimensions	[mm]	34.8 x 13 x 21
Material		housing: stainless steel (1.4404 / 316L); sealing: EPDM; plastics: PPSU
Lens material		front lens:PMMA
Lens alignment		Side sensing
Tightening torque	[Nm]	1; (screws)

Displays / operating elements		
Display	Power	1 x LED, green

Remarks		
Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.


Electrical connection

Cable: 0.3 m, PVC; 2 x 0.25 mm²

Connector: 1 x M12; coding: A; Contacts: 4



Connection

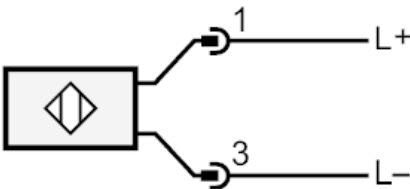

O6S301




Through-beam sensor transmitter

O6S-00KG/0,30m/US

Diagrams and graphs

excess gain graph

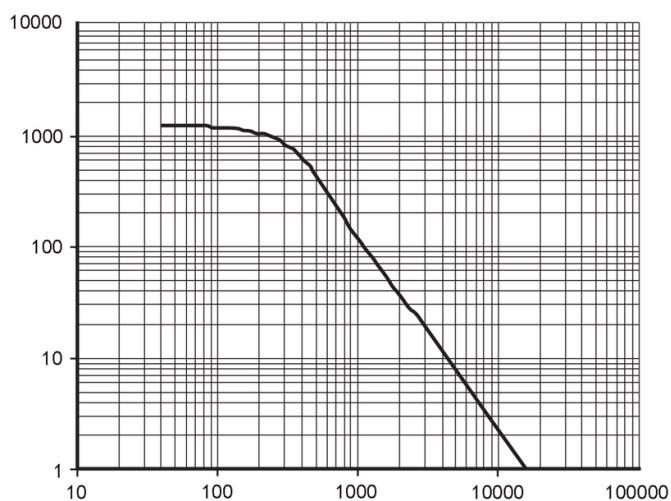

x: distance [mm]

y: excess gain factor