


OGE503



Through-beam sensor receiver

OGE-FNKG/US100

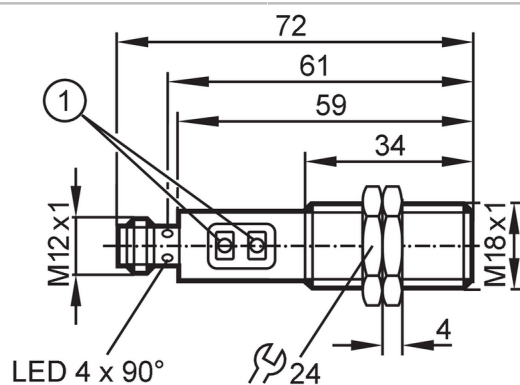

1 Programming buttons



Product characteristics

Type of light	red light
Housing	Threaded type

Application

Function principle	Through-beam sensor
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	11
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

Outputs

Electrical design		NPN
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C))
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range


Transmitter / receiver		receiver
Range	[m]	< 25
Factory setting		dark-on mode
Range adjustable		yes

OGE503



Through-beam sensor receiver

OGE-FNKG/US100

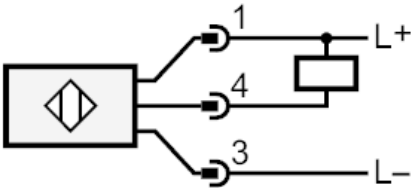Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	822
Mechanical data		
Weight	[g]	61.8
Housing		Threaded type
Dimensions	[mm]	M18 x 1 / L = 72
Thread designation		M18 x 1
Material		stainless steel (1.4404 / 316L); PA; LCP; EPDM; TPU (urethane)
Lens material		front lens:PMMA
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Accessories		
Items supplied		lock nuts: 2
Remarks		
Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: 4		
		
Connection		
		



Through-beam sensor receiver

OGE-FNKG/US100

Diagrams and graphs

excess gain graph

