




Through-beam sensor transmitter

OGS-00KG/6M

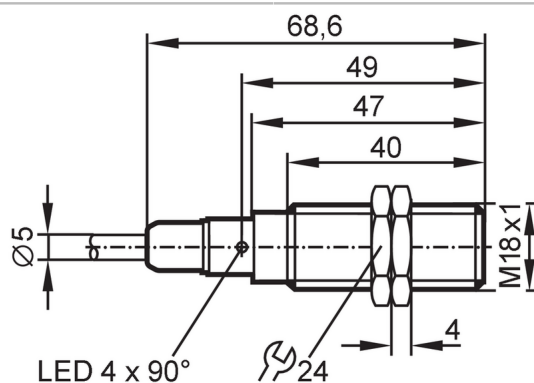

Product characteristics

Type of light	red light
Housing	Threaded type

Application

Function principle	Through-beam sensor
Application	food and beverage industry

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15
Protection class	II
Reverse polarity protection	yes
Type of light	red light

Monitoring range

Transmitter / receiver	transmitter
Range [m]	< 20
Range adjustable	no
Max. light spot diameter [mm]	800
Light spot dimensions refer to	at maximum range

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 65; IP 67; IP 68; IP 69K

Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	755

Mechanical data

Weight [g]	245.8
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 68.6
Thread designation	M18 x 1
Material	housing: stainless steel (1.4404 / 316L); sealing: EPDM
Lens material	front lens: PMMA

OGS301



Through-beam sensor transmitter


OGS-00KG/6M

Displays / operating elements		
Display	Power	1 x LED, green
Accessories		
Items supplied	lock nuts: 2	
Remarks		
Remarks	cULus - Class 2 source required	
Pack quantity	1 pcs.	

Electrical connection

Cable: 6 m, PVC; 3 x 0.34 mm²

Connection

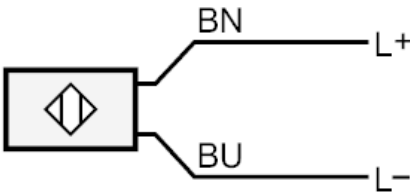

BN = Core colors : brown
BU = blue

Diagrams and graphs

excess gain graph

