


OGS380



Through-beam sensor transmitter

OGS-00KG/US/V4A/CUBE

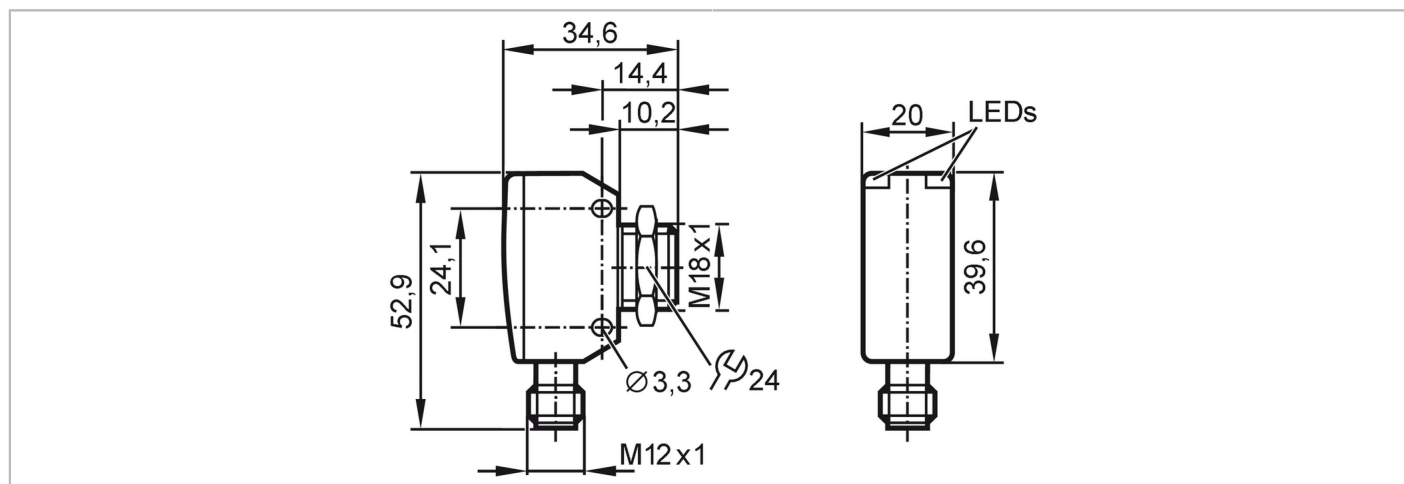

Product characteristics

Type of light	red light
Housing	rectangular with M18 thread

Application

Function principle	Through-beam sensor
Application	food and beverage industry

Electrical data

Operating voltage	[V]	10...30 DC
Rated insulation voltage	[V]	32
Current consumption	[mA]	17
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	300
Type of light		red light
Wave length	[nm]	662

Monitoring range

Transmitter / receiver	transmitter
Range [m]	15
Max. light spot diameter [mm]	800
Light spot dimensions refer to	at maximum range

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Common - I&D	Identification and Diagnosis
SIO mode	no	
Required master port class	A	



Through-beam sensor transmitter

OGS-00KG/US/V4A/CUBE

Min. process cycle time	[ms]	2.5
IO-Link process data (cyclical)	Function	bit length
IO-Link functions (acyclical)	device status	4
Supported DeviceIDs	application specific tag; operating hours counter	
Note	Type of operation	DeviceID
	default	1135
For further information please see the IODD PDF file at "Downloads"		

Operating conditions

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...80
Protection	IP 65; IP 67; IP 68; IP 69K	

Tests / approvals

EMC	EN 60947-5-2	
MTTF	[years]	1011
UL approval	Ta	-25...80 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191

Mechanical data

Weight	[g]	78
Housing	rectangular with M18 thread	
Dimensions	[mm]	52.9 x 20 x 34.6
Thread designation	M18 x 1	
Material	housing: stainless steel (630/1.4542/17-4 PH); rear of the housing: PEI	
Lens material	front lens:PEI	
Lens alignment	Side sensing	

Displays / operating elements

Display	Power	1 x LED, green
---------	-------	----------------

Accessories

Items supplied	lock nut: 1
----------------	-------------

Remarks

Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4





Through-beam sensor transmitter

OGS-00KG/US/V4A/CUBE

Connection



Diagrams and graphs

excess gain graph

