




Diffuse reflection sensors with background suppression

OGWIHPKG/US/IO-LINK

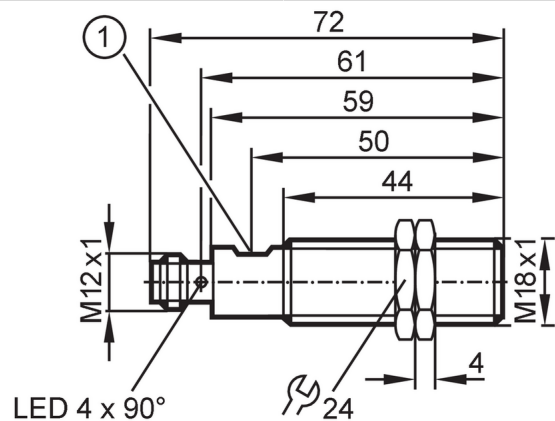

1 potentiometer



Product characteristics		
Type of light		Infrared light
Housing		Threaded type
Application		
Special feature		Background suppression
Application	[m]	0.025...2
Function principle		Diffuse reflection sensor
Application		Industrial applications
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	300
Type of light		Infrared light
Wave length	[nm]	940
Outputs		
Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Monitoring range		
Range	[mm]	25...400
Range adjustable		yes
Max. light spot diameter	[mm]	200
Light spot dimensions refer to		at maximum range



Diffuse reflection sensors with background suppression

OGWIHPKG/US/IO-LINK

Background suppression available	yes	
Background suppression [m]	2	
Measuring/setting range		
Sampling rate [Hz]	10	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 3.1	Measuring Sensor
	Common - I&D	Identification and Diagnosis
	Function	Multiple switching signal
	Function	Teach channel
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	10	
Supported DeviceIDs	Type of operation	DeviceID
	default	1161
Operating conditions		
Ambient temperature [°C]	-20...55	
Storage temperature [°C]	-40...85	
Protection	IP 65	
Max. immunity to extraneous light [klx]	8	
Tests / approvals		
EMC	EN 60947-5-2	
Notes on laser protection	Caution:	Laser light
	laser class:	1
		EN / IEC60825-1:2007
		EN / IEC60825-1:2014
		Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF [years]	690	
UL approval	Ta	-20...55 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191
Mechanical data		
Weight [g]	55.2	
Housing	Threaded type	
Dimensions [mm]	M18 x 1 / L = 72	
Thread designation	M18 x 1	
Material	housing: stainless steel (1.4404 / 316L); End cap: ABS; operator interface: TPE; lock nuts: brass white bronze coated	



Diffuse reflection sensors with background suppression

OGWIHPKG/US/IO-LINK


Lens material	front lens:PMMA	
Displays / operating elements		
Display	Switching status	4 x 90° LED, yellow
Operating elements		potentiometer
Accessories		
Items supplied	lock nuts: 2 x M18	
Remarks		
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4




Connection

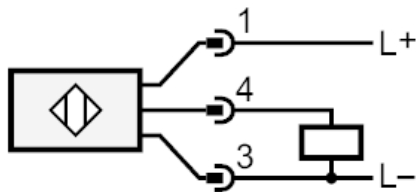

4 OUT / IO-Link

Diagrams and graphs

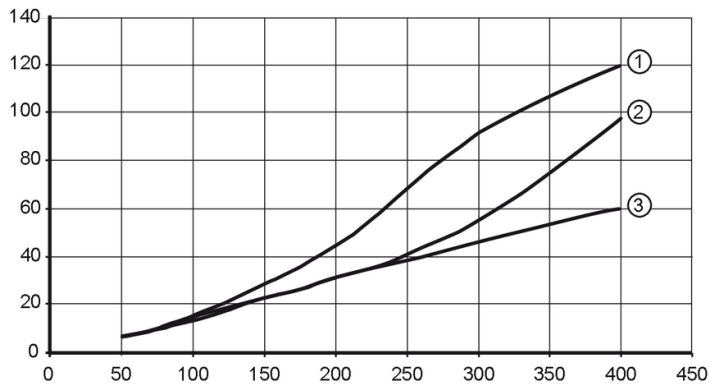


- 1 < 8 kLux
- 2 < 3 kLux
- 3 < 1 kLux



Diffuse reflection sensors with background suppression

OGWIHPKG/US/IO-LINK

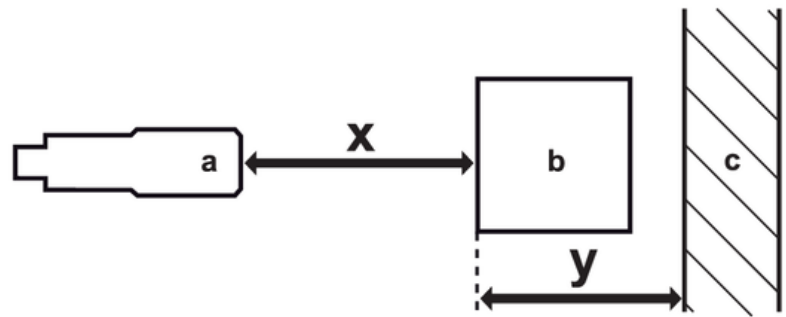

- a: sensor
- b: object
- c: background
- x: distance sensor/object [mm]
- y: min. distance object/background [mm]