




Through-beam sensor receiver

OJE-FPKG/SO

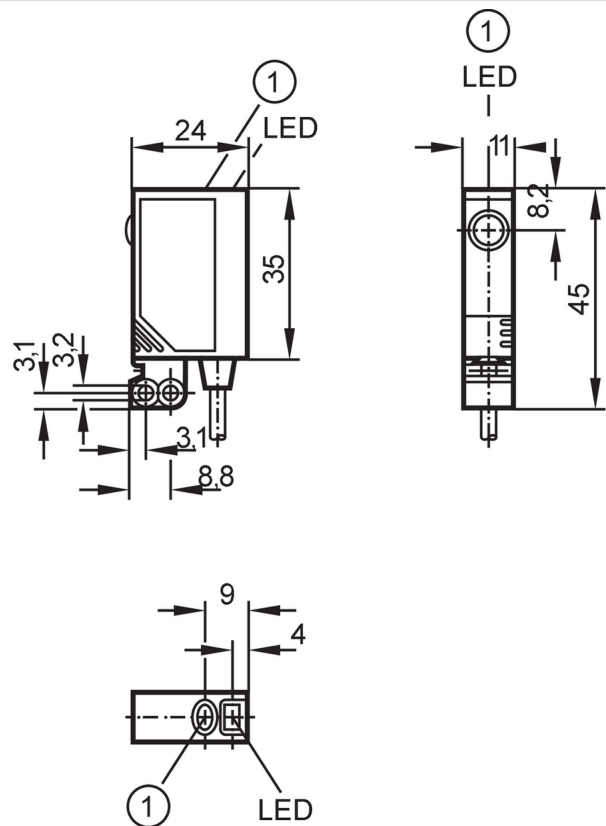

1 pushbutton



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Function principle		Through-beam sensor
Application		Industrial applications
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 12
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660
Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1200



Through-beam sensor receiver

OJE-FPKG/SO

Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Monitoring range		
Transmitter / receiver	receiver	
Range [m]	< 10	
Range adjustable	yes	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]	952	
Mechanical data		
Weight [g]	72.5	
Housing	rectangular	
Dimensions [mm]	35 x 11 x 24	
Material	housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS	
Lens material	front lens:glass	
Lens alignment	Side sensing	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red
Electronic lock	yes	
Accessories		
Items supplied	screws: 2 x (M3 x 16 mm)	
	Basic clip: 1, E20964	
	spring washers: 2	
	Nuts: 2	
Remarks		
Remarks	cULus - Class 2 source required	
Pack quantity	1 pcs.	




Through-beam sensor receiver

OJE-FPKG/SO

Electrical connection

Cable: 2 m, PVC; 4 x 0.14 mm²

Connection

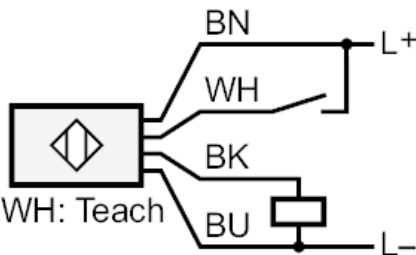

- | | |
|------|---------------|
| | Core colors : |
| BK = | black |
| BN = | brown |
| BU = | blue |
| WH = | white |

Diagrams and graphs

excess gain graph

