




LASER diffuse reflection sensor

OJHLFNKG/SO/AS

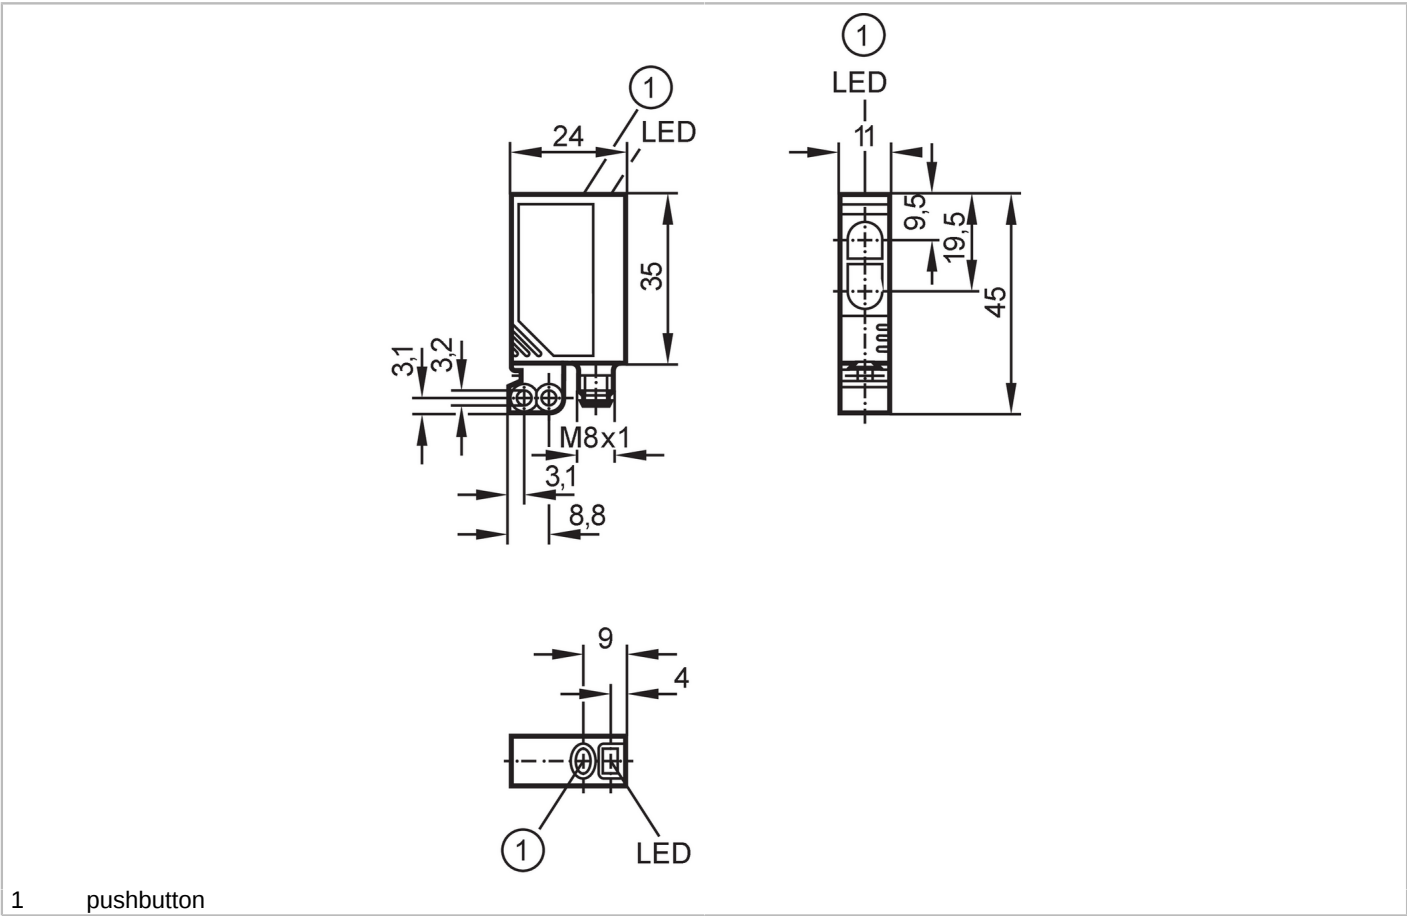

Product characteristics		
Type of light	red light	
Laser protection class	1	
Housing	rectangular	
Application		
Special feature	Background suppression	
Function principle	Diffuse reflection sensor	
Application	For applications in robotics, assembly and handling technology	
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	13
Protection class	III	
Reverse polarity protection	yes	
Type of light	red light	
Wave length	[nm]	650
Typ. lifetime	[h]	50000
Outputs		
Electrical design	NPN	
Output function	light-on/dark-on mode; (programmable)	



LASER diffuse reflection sensor

OJHLFNKG/SO/AS

Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range		
Range	[mm]	15...200; (white paper 200 x 200 mm 90 % remission)
Range adjustable		yes
Diameter of the smallest detectable object	[mm]	2
Max. light spot width	[mm]	2
Max. light spot height	[mm]	1
Background suppression available		yes

Operating conditions		
Ambient temperature	[°C]	-10...60
Protection		IP 67

Tests / approvals		
EMC	EN 60947-5-2	
Laser protection class		1
Notes on laser protection	Caution:	Laser light
	laser class:	1
		EN / IEC60825-1:2007
		EN / IEC60825-1:2014
		Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF	[years]	516

Mechanical data		
Weight	[g]	29.9
Housing		rectangular
Dimensions	[mm]	35 x 11 x 24
Material		housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS
Lens material		front lens:PMMA
Lens alignment		Side sensing

Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Electronic lock		yes

OJ5055




LASER diffuse reflection sensor


OJHLFNKG/SO/AS

Accessories	
Items supplied	Basic clip: 1, E20964
	screws: 2 x (M3 x 16 mm)
	spring washers: 2
	Nuts: 2

Remarks	
Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.

Electrical connection	
Connector: 1 x M8; coding: A; Contacts: 4	
	

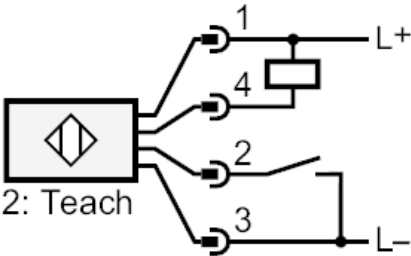Connection	
	

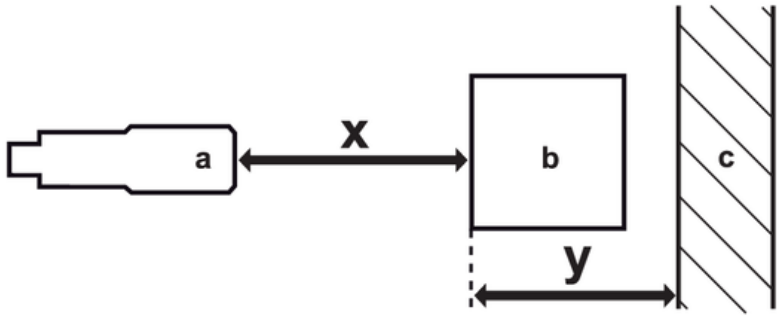
Diagrams and graphs	
	
a: sensor b: object c: background x: distance sensor/object [mm] y: min. distance object/background [mm]	



LASER diffuse reflection sensor

OJHLFNKG/SO/AS

Background suppression chart

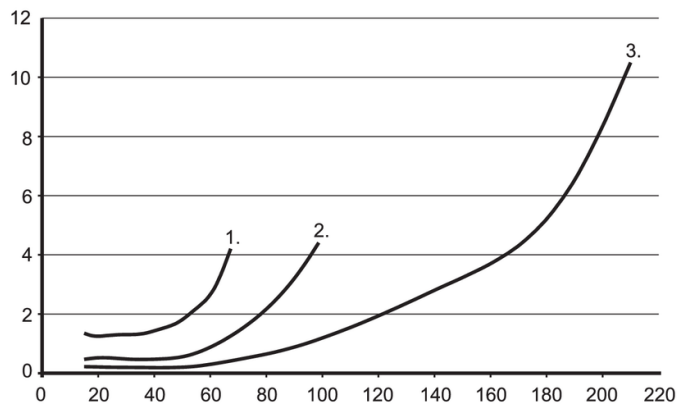

x: distance sensor/object [mm]

y: min. distance object/background [mm]

1 = object black (6 % remission) , Background white (90 % remission)

2 = object grey (18 % remission) , Background white (90 % remission)

3 = object white (90 % remission) , Background white (90 % remission)