


OJS200



Through-beam sensor transmitter

OJS-OOKG/SO/AS

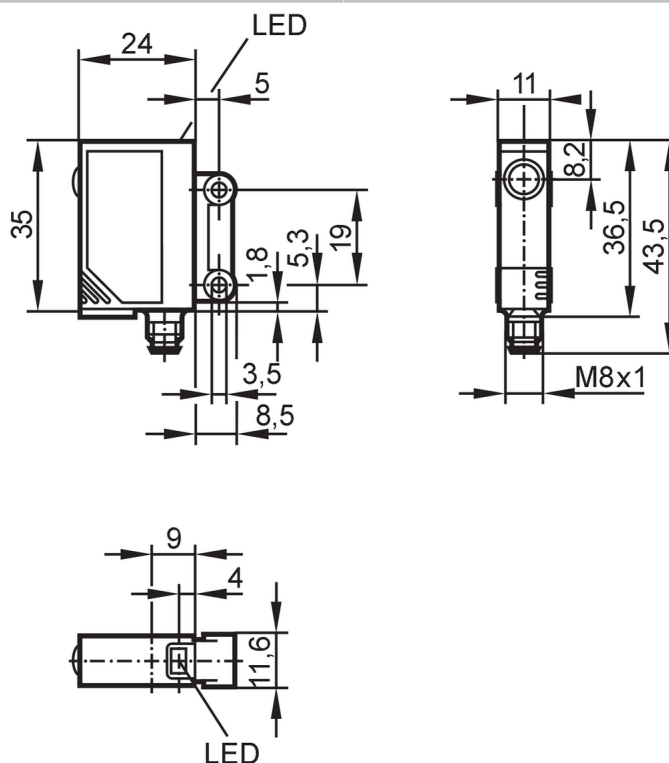

Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Through-beam sensor
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes
Type of light		red light

Monitoring range

Transmitter / receiver		transmitter
Range	[m]	0...10
Range adjustable		no
Max. light spot diameter	[mm]	1000
Light spot dimensions refer to		at maximum range

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

OJS200



Through-beam sensor transmitter

OJS-00KG/SO/AS

Tests / approvals

EMC	EN 60947-5-2	
MTTF	[years]	2230

Mechanical data

Weight	[g]	16.6
Housing		rectangular
Dimensions	[mm]	35 x 11 x 24
Material		housing: ABS; LED window: SEPS
Lens material		front lens:PMMA
Lens alignment		Side sensing

Displays / operating elements

Display	Power	1 x LED, green
---------	-------	----------------

Remarks

Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M8; coding: A; Contacts: 3



Connection

