


OT5008



Through-beam sensor transmitter

OTS-00KG/US-100

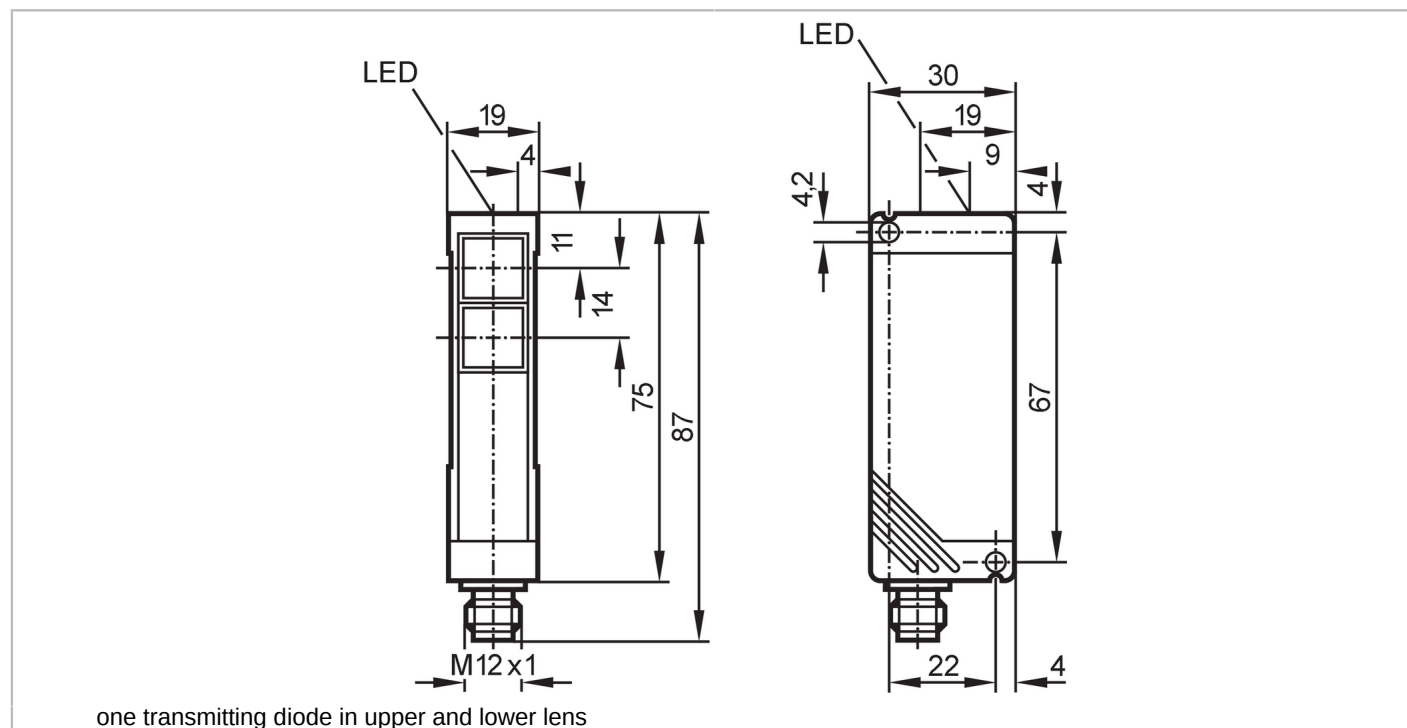

Product characteristics

Type of light	Infrared light
Housing	rectangular

Application

Function principle	Through-beam sensor
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...50 DC
Current consumption	[mA]	20; ((24 V))
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	880

Monitoring range

Transmitter / receiver		transmitter
Range	[m]	< 10
Range adjustable		no
Max. light spot diameter	[mm]	524
Light spot dimensions refer to		at maximum range

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 65

OT5008



Through-beam sensor transmitter

OTS-00KG/US-100

Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	1862
Mechanical data		
Weight	[g]	153
Housing		rectangular
Dimensions	[mm]	87 x 19 x 30
Material		housing: PBT
Lens material		front lens:PMMA
Lens alignment		Side sensing
Displays / operating elements		
Display	Power	1 x LED, green
Accessories		
Items supplied	Angle bracket: 1, E20461	
	screwdrivers	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: 4		
		
Connection		
