




Retro-reflective sensor

OTR-FPKG/US-100-IPF

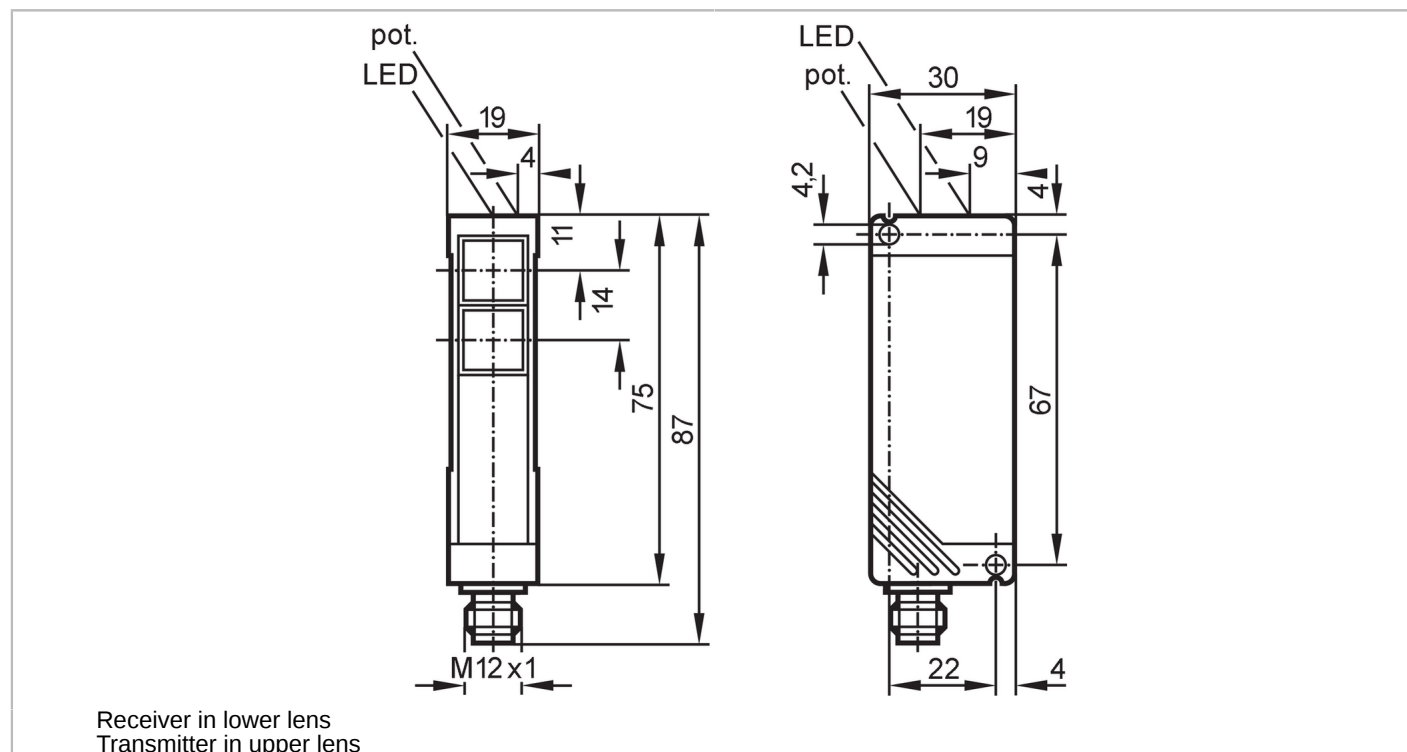

Product characteristics

Type of light	Infrared light
Housing	rectangular

Application

Function principle	Retro-reflective sensor
Application	Industrial applications

Electrical data

Operating voltage [V]	10...50 DC
Current consumption [mA]	40; ((24 V))
Protection class	II
Reverse polarity protection	yes
Type of light	Infrared light
Wave length [nm]	880

Outputs

Electrical design	PNP
Output function	light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	150
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)

OT5013



Retro-reflective sensor

OTR-FPKG/US-100-IPF

Overload protection	yes
---------------------	-----

Monitoring range

Range referred to prismatic reflector [m]	0.15...5; (Prismatic reflector Ø 80 E20005)
Range adjustable	yes
Max. light spot diameter [mm]	262
Light spot dimensions refer to	at maximum range

Operating conditions

Ambient temperature [°C]	-25...60
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	583

Mechanical data

Weight [g]	161.5
Housing	rectangular
Dimensions [mm]	75 x 19 x 30
Material	housing: PBT
Lens material	front lens: PMMA
Lens alignment	Side sensing

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green

Accessories

Items supplied	Angle bracket: 1, E20461 screwdrivers
----------------	--

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



OT5013



Retro-reflective sensor

OTR-FPKG/US-100-IPF

Connection



Diagrams and graphs

excess gain graph

