




Through-beam sensor receiver

OUE-HPKG/US-100-DPO

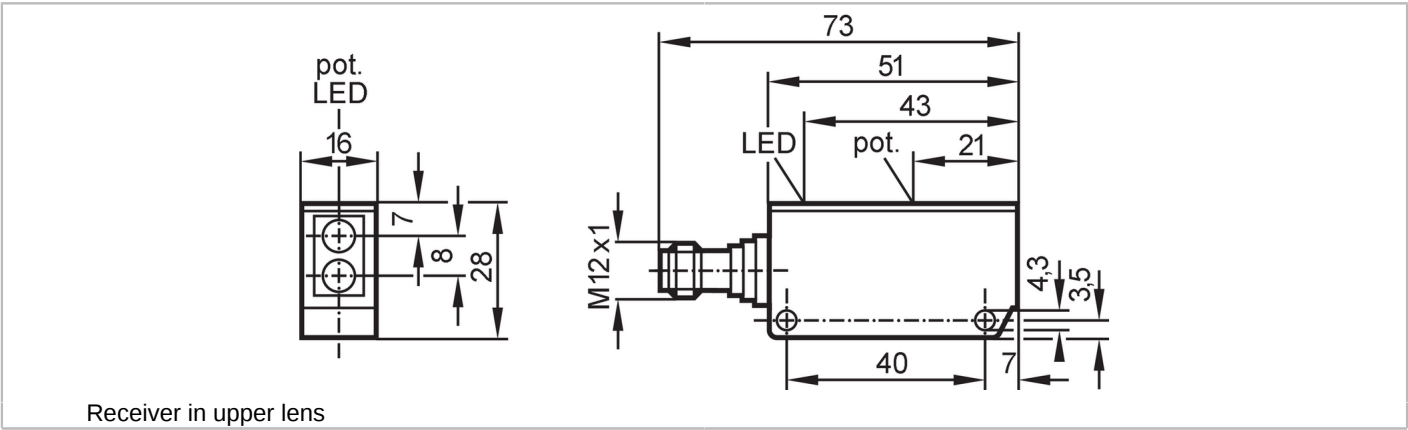

Receiver in upper lens



Product characteristics		
Type of light		Infrared light
Housing		rectangular
Application		
Function principle		Through-beam sensor
Application		Industrial applications
Electrical data		
Operating voltage	[V]	10...55 DC; (cULus - Class 2 source required)
Current consumption	[mA]	20; ((24 V))
Protection class		III
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	880
Outputs		
Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	140
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Transmitter / receiver		receiver
Range	[m]	< 6
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...80



Through-beam sensor receiver

OUE-HPKG/US-100-DPO

Protection	IP 67
------------	-------

Tests / approvals

EMC	EN 60947-5-2	
MTTF [years]	618	
UL approval	Ta	< 40 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	UL approval number	E032
	File number UL	E174191

Mechanical data

Weight [g]	73.5
Housing	rectangular
Dimensions [mm]	28 x 16 x 51
Number of channels	1
Material	housing: PPO modified
Lens material	front lens:glass

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	Angle bracket: 1, E20211
----------------	--------------------------

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



Connection

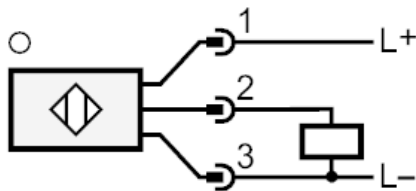



Through-beam sensor receiver

OUE-HPKG/US-100-DPO

Diagrams and graphs

excess gain graph

