




Flush pressure sensor with display

PI-001BREA01-MFRKG/US/ /P

Alternative articles: PI1707
When selecting an alternative article and accessories please note that technical data may differ!

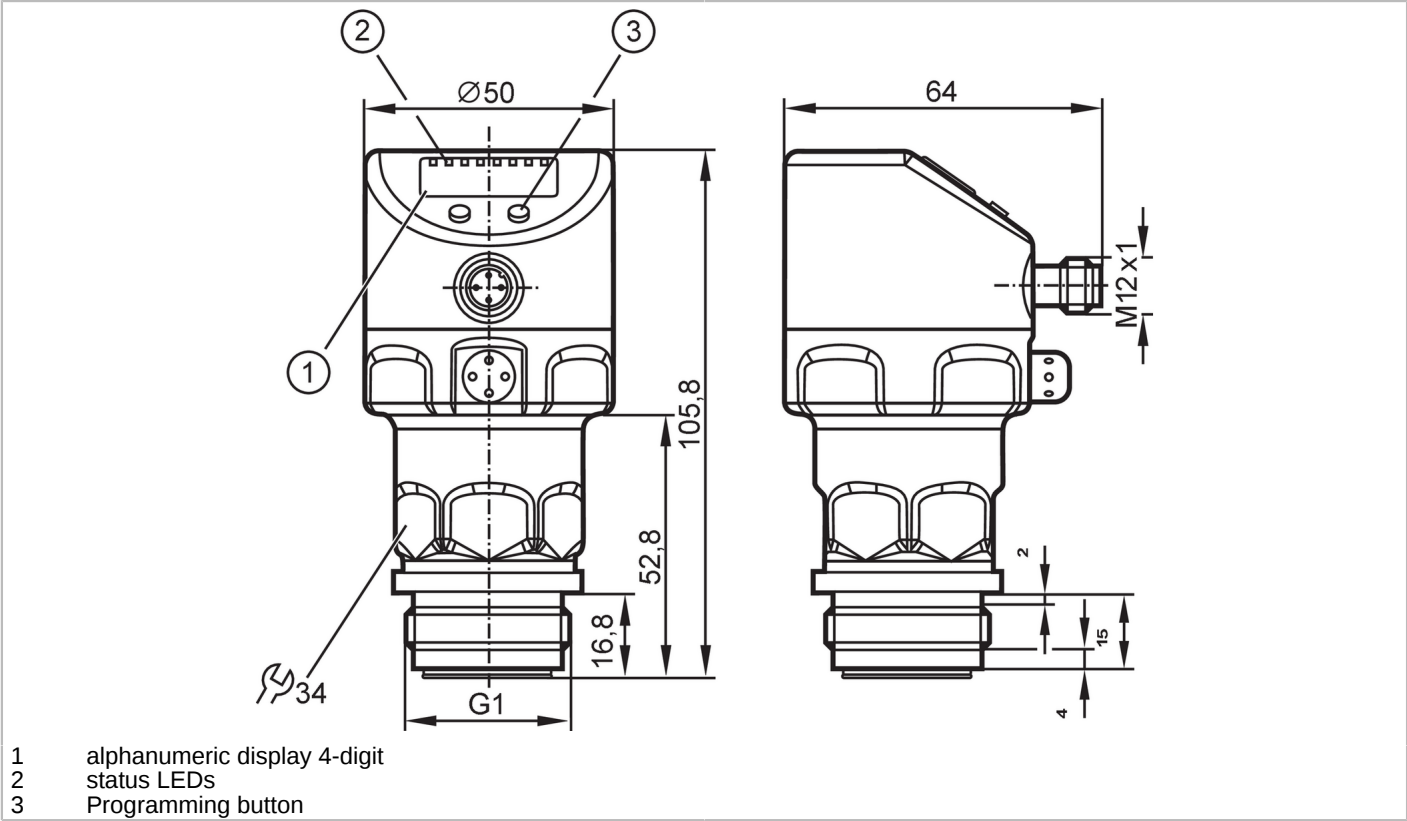

ACS CRN LISTED EHEDG Certified Reg31

Product characteristics			
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1		
Measuring range	-0.05...1 bar	-50...1000 mbar	-0.73...14.5 psi -5...100 kPa
Process connection	threaded connection G 1 external thread with Aseptoflex Vario sealing contour		
Note	G1 Gewinde nach ISO 228. Alternativ dichtend über rückwärtige Dichtkontur mit Dichtung in Anlehnung an DIN EN ISO 1179-2.		
Application			
Special feature	gold-plated contacts		
Application	flush mountable for the food and beverage industry		
Media	viscous media and liquids with suspended particles; liquids and gases		
Medium temperature [°C]	-25...125; (145 max. 1h)		
Min. burst pressure	30000 mbar	435 psi	3000 kPa
Pressure rating	10000 mbar	145 psi	1000 kPa
Vacuum resistance	-1000 mbar		-0.1 MPa
Type of pressure	relative pressure		
No dead space	yes		
MAWP (for applications according to CRN) [bar]	10		
Electrical data			
Min. insulation resistance [MΩ]	100; (500 V DC)		



Flush pressure sensor with display

PI-001BREA01-MFRKG/US/ /P

Protection class	III			
Reverse polarity protection	yes			
Integrated watchdog	yes			
2-wire				
Operating voltage	[V]	20...32 DC		
Current consumption	[mA]	3.6...21		
Power-on delay time	[s]	1		
3-wire				
Operating voltage	[V]	18...32 DC		
Current consumption	[mA]	< 45		
Power-on delay time	[s]	0.5		
Inputs / outputs				
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1			
Outputs				
Total number of outputs	2			
Output signal	switching signal; analog signal; IO-Link; (configurable)			
Electrical design	PNP/NPN			
Number of digital outputs	2			
Output function	normally open / closed; (configurable)			
Number of analog outputs	1			
Analog current output	[mA]	4...20, invertible; (scalable)		
Short-circuit protection	yes			
Type of short-circuit protection	yes (non-latching)			
Overload protection	yes			
2-wire				
Max. load	[Ω]	300		
3-wire				
Max. voltage drop switching output DC	[V]	2		
Permanent current rating of switching output DC	[mA]	250		
Switching frequency DC	[Hz]	125		
Max. load	[Ω]	(Ub - 10 V) / 20 mA		
Measuring/setting range				
Measuring range	-0.05...1 bar	-50...1000 mbar	-0.73...14.5 psi	-5...100 kPa
Set point SP	-48...1000 mbar	-0.7...14.5 psi	-4.8...100 kPa	
Reset point rP	-50...998 mbar	-0.73...14.47 psi	-0.5...99.8 kPa	
Analog start point	-50...750 mbar	-0.73...10.88 psi	-5...75 kPa	
Analog end point	200...1000 mbar	2.9...14.5 psi	20...100 kPa	
In steps of	1 mbar	0.01 psi	0.1 kPa	
Factory setting		SP1 = 250 mbar	rP1 = 230 mbar	
		SP2 = 750 mbar	rP2 = 730 mbar	
		ASP = 0 mbar	AEP = 1000 mbar	
		dAP = 0.06 s	dAA = 0.03 s	



Flush pressure sensor with display

PI-001BREA01-MFRKG/US/ /P

Accuracy / deviations		
Switch point accuracy [% of the span]	< ± 0,2; (Turn down 1:1)	
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)	
Characteristics deviation [% of the span]	< ± 0,2; (Turn down 1:1 , linearity, incl. hysteresis and repeatability , limit value setting to DIN EN IEC 62828-1)	
Linearity deviation [% of the span]	< ± 0,15; (Turn down 1:1)	
Hysteresis deviation [% of the span]	< ± 0,15; (Turn down 1:1)	
Long-term stability [% of the span]	< ± 0,1; (Turn down 1:1; per year)	
Temperature coefficient zero point [% of the span / 10 K]	< ± 0,05; (0...70 °C)	
Temperature coefficient span [% of the span / 10 K]	< ± 0,15; (0...70 °C)	
Reaction times		
Damping process value dAP [s]	0...30	
Damping for the analog output dAA [s]	0.01...99.99	
2-wire		
Step response time analog output [ms]	45	
3-wire		
Min. response time of switching output (dAP) [ms]	3	
Step response time analog output [ms]	7	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.0	
SIO mode	yes	
Required master port class	A	
Process data analog	1	
Process data binary	2	
Min. process cycle time [ms]	2.3	
Supported DeviceIDs	Type of operation	DeviceID
	default	256
Operating conditions		
Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-40...100	
Protection	IP 67; IP 68; IP 69K	



Flush pressure sensor with display

PI-001BREA01-MFRKG/US/ /P

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	160
Note on approval	Factory certificate available as download at www.factory-certificate.ifm	
Mechanical data		
Weight	[g]	356
Housing		tubular
Dimensions	[mm]	Ø 50 / L = 105.8
Material	stainless steel (1.4404 / 316L); FKM; PTFE; PBT; PEI; PFA	
Materials (wetted parts)	ceramics (99.9 % Al2O3); stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm; PTFE	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1 external thread with Aseptoflex Vario sealing contour	
Displays / operating elements		
Display	Display unit	LED, green
	Switching status	LED, yellow
	Function display	alphanumeric display, 4-digit
	Measured values	alphanumeric display, 4-digit
Display unit	mbar; kPa; psi; inH2O; mWS; % of the span	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: 4, gold-plated		
		



Flush pressure sensor with display

PI-001BREA01-MFRKG/US/ /P

Connection



- 1 connection for 2-wire operation
- 2 connection for 3-wire operation :
- OUT1 Switching output
- OUT2 Switching output
- analog output
- 3 connection for IO-Link parameter setting (P = communication via IO-Link)