


PQD489



Pressure sensor for pneumatics

PQ-001BKHR18-MFPKG/AS/

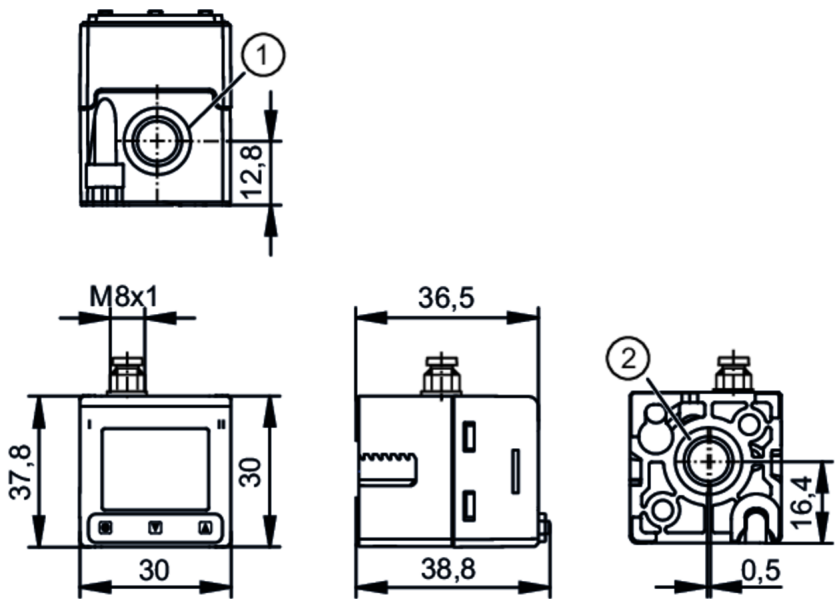

- 1 main pressure connection (P1) G 1/8 Tightening torque < 8 Nm insertion depth < 6.8 mm
2 differential pressure connection (P2) G 1/8 Tightening torque < 8 Nm insertion depth < 6.8 mm



Product characteristics				
Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1			
Measuring range	-1...1 bar	-1000...1000 mbar	-14.5...14.5 psi	-100...100 kPa
Process connection	threaded connection G 1/8 Internal thread (2x)			
Application				
Special feature	gold-plated contacts			
Application	for industrial applications			
Media	compressed air; nitrogen (N2)			
Conditionally suitable for	other media on request			
Medium temperature	0...60 °C		32...140 °F	
Min. burst pressure	20 bar	290 psi	2 MPa	
Pressure rating	10 bar	145 psi	1 MPa	
Vacuum resistance	-1000 mbar	-14.5 psi	-0.1 MPa	
Type of pressure	relative pressure; vacuum; differential pressure			
Electrical data				
Operating voltage	[V]	18...30 DC		
Current consumption	[mA]	< 30		
Min. insulation resistance	[MΩ]	100; (500 V DC)		
Protection class		III		
Reverse polarity protection		yes		
Power-on delay time	[s]	0.3		
Integrated watchdog		yes		
Inputs / outputs				
Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1			

PQD489



Pressure sensor for pneumatics

PQ-001BKHR18-MFPKG/AS/

Outputs				
Total number of outputs	2			
Output signal	switching signal; analog signal; IO-Link; (configurable)			
Electrical design	PNP/NPN; (configurable)			
Number of digital outputs	1			
Output function	normally open / closed; (configurable)			
Max. voltage drop switching output DC [V]	2.5			
Permanent current rating of switching output DC [mA]	100			
Switching frequency DC [Hz]	< 170			
Number of analog outputs	1			
Analog current output [mA]	4...20, invertible; (scalable)			
Max. load [Ω]	500			
Analog voltage output [V]	0...10 / 1...5, invertible; (scalable)			
Min. load resistance [Ω]	2000			
Short-circuit protection	yes			
Type of short-circuit protection	yes (non-latching)			
Overload protection	yes			
Measuring/setting range				
Measuring range	-1...1 bar	-1000...1000 mbar	-14.5...14.5 psi	-100...100 kPa
Set point SP	-1...1 bar	-14.5...14.5 psi		-100...100 kPa
Analog start point	-1...0.6 bar	-14.5...8.7 psi		-100...60 kPa
Analog end point	-0.6...1 bar	-8.7...14.5 psi		-60...100 kPa
In steps of	0.001 bar	0.01 psi		0.1 kPa
Accuracy / deviations				
Switch point accuracy [% of the span]	< ± 0,5; (Turn down 1:1)			
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K: Turn down 1:1)			
Characteristics deviation [% of the span]	< ± 0,5; (Turn down 1:1; including linearity, hysteresis and repeatability)			
Linearity deviation [% of the span]	< ± 0.5 % (limit value setting according to DIN EN IEC 62828-1) Turn down 1:1			
Hysteresis deviation [% of the span]	< ± 0,25; (Turn down 1:1)			
Long-term stability [% of the span]	< ± 0,1; (Turn down 1:1; per year)			
Temperature coefficient zero point [% of the span / 10 K]	0,2; (Turn down 1:1)			
Temperature coefficient span [% of the span / 10 K]	0,2; (Turn down 1:1)			
Reaction times				
Response time [ms]	6			
Damping process value dAP [s]	0...4			

PQD489



Pressure sensor for pneumatics

PQ-001BKHR18-MFPKG/AS/

Damping for the analog output dAA	[s]	0...99.99
-----------------------------------	-----	-----------

Software / programming

Parameter setting options	display can be rotated and switched off; analog output selectable and scalable; Teach function; simulation function; Diagnostic function
---------------------------	--

Interfaces

Communication interface	IO-Link	
Transmission type	COM3 (230,4 kBaud)	
IO-Link revision	1.1.4	
SDCI standard	IEC 61131-9: 2019-06	
Profiles	Smart Sensor - SSP 4.1.1	Measuring and Switching Sensor, 1 channel
	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
	Extension	Quantity detection, switches when value exceeds the setpoint
	Function	Locator
	Function	ProductURI
SIO mode	yes	
Required master port class	A	
Process data analog	1	
Process data binary	2	
Min. process cycle time	[ms]	0.6
IO-Link resolution pressure	[bar]	0.0001
IO-Link process data (cyclical)	Function	bit length
	pressure	16
	device status	4
	SSC1.1	1
	SSC1.2	1
IO-Link functions (acyclical)	application specific tag; internal temperature; Medium temperature	
Supported DeviceIDs	Type of operation	DeviceID
	default	1996

Operating conditions

Ambient temperature	0...60 °C	32...140 °F
Storage temperature	-25...85 °C	-13...185 °F
Protection	IP 65	

Tests / approvals

EMC	DIN EN 61326-1	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	429
UL approval	UL approval number	J085
	File number UL	E174189
Pressure equipment directive	sound engineering practice; can be used for stable gases fluid group 2	

Mechanical data

Weight	[g]	53.2
Housing	rectangular	

PQD489



Pressure sensor for pneumatics

PQ-001BKHR18-MFPKG/AS/

Dimensions	[mm]	37.7 x 30 x 38.6
Material		PBT; PC; TPE; NBR; FKM; brass; silicon (coated)
Materials (wetted parts)		PBT; FKM; brass; silicon (coated)
Min. pressure cycles		50 million
Process connection		threaded connection G 1/8 Internal thread (2x)

Displays / operating elements		
Display	Display 1"	128 x 96 pixels
	Switching status	1 x LED, yellow
Display unit		mbar; kPa; psi; mmHg; inHg; kgf/cm²

Accessories	
Items supplied	head cap screw: 2 x (M3 x 8 mm)


Remarks	
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M8; coding: A; Contacts: 4, gold-plated



Connection

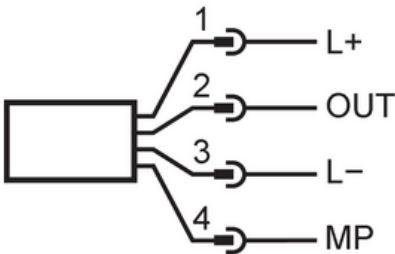

1	L+	
2	OUT	AO
3	L-	
4	MP	DO, IO-Link

AO: analog output; DO: digital output; MP: multi-function connection

PQD489



Pressure sensor for pneumatics

PQ-001BKHR18-MFPKG/AS/

Diagrams and graphs

drilling template

