


RMB310



Absolute multiturn encoder with solid shaft

MULTITURN ENCODER WETLINE

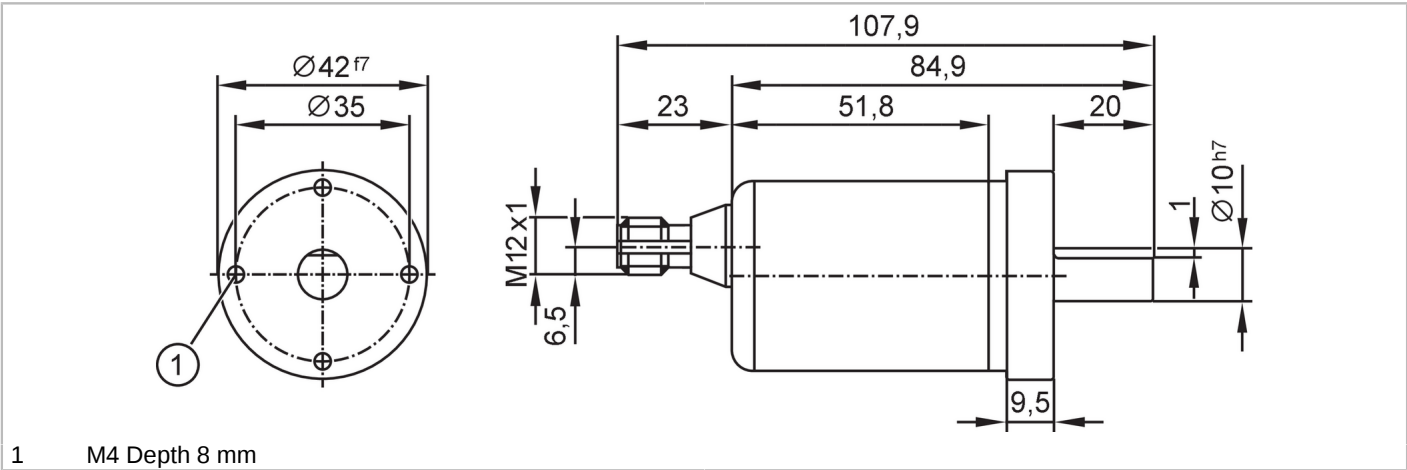

Product characteristics	
Resolution	65536 steps; 32768 revolutions; 31 bit
Communication interface	IO-Link
Shaft design	solid shaft
Shaft diameter [mm]	10
Application	
Function principle	absolute
Revolution type	multiturn
Detection system	magnetic
Electrical data	
Operating voltage [V]	18...30 DC; (; to PELV)
Rated insulation voltage [V]	30
Current consumption [mA]	< 75
Protection class	III
Reverse polarity protection	yes
Max. power-on delay time [ms]	1000
Max. revolution electrical [U/min]	6000
Outputs	
Short-circuit protection	yes
Measuring/setting range	
Resolution	65536 steps; 32768 revolutions; 31 bit
Accuracy / deviations	
Accuracy [°]	0.1
Software / programming	
Parameter setting options	preset; Zero point; Direction of rotation; rotational speed
Interfaces	
Communication interface	IO-Link
Transmission type	COM3 (230,4 kBaud)
IO-Link revision	1.1



Absolute multiturn encoder with solid shaft

MULTITURN ENCODER WETLINE

SDCI standard		IEC 61131-9 CDV	
Profiles		Common - I&D	Identification and Diagnosis
		Function	Multiple switching signal
		Function	Measurement data, high resolution
SIO mode		no	
Required master port class		A	
Min. process cycle time	[ms]	2.3	
IO-Link process data (cyclical)		Function	bit length
		process value	96
		device status	4
		binary switching information	5
IO-Link functions (acyclical)		application specific tag; operating hours counter; internal temperature; switching cycles counter	
Supported DeviceIDs		Type of operation	DeviceID
		default	1064
Note		For further information please see the IODD PDF file at "Downloads"	
Operating conditions			
Ambient temperature	[°C]	-40...85	
Storage temperature	[°C]	-40...85	
Max. relative air humidity	[%]	98; (Condensation not permissible)	
Protection		IP 68; IP 69K	
Tests / approvals			
EMC		DIN EN 61000-4-2 ESD	4 kV CD
		DIN EN 61000-4-3 HF radiated	10 V/m
		DIN EN 61000-4-4 Burst	2 kV
		DIN EN 61000-4-6 HF conducted	10 V
Vibration resistance		DIN EN 60068-2-6	30 g / 10...1000 Hz half-sine
Shock resistance		DIN EN 60068-2-27	200 g / 11 ms
Continuous shock resistance		DIN EN 60068-2-29	30 g / 6 ms half-sine
MTTF	[years]	283	
UL approval		voltage supply	Class 2
Mechanical data			
Weight	[g]	472.1	
Housing		tubular	
Dimensions	[mm]	Ø 42 / L = 107.9	
Material		flange: stainless steel (1.4404 / 316L); housing: stainless steel (1.4404 / 316L)	
Max. starting torque	[Nm]	0.05	
Reference temperature torque	[°C]	20	
Shaft design		solid shaft	
Shaft diameter	[mm]	10	
Shaft material		stainless steel (1.4112 / 440B)	
Max. shaft load axial (at the shaft end)	[N]	300	
Max. shaft load radial (at the shaft end)	[N]	300	
Fixing flange		Synchro-flange	

RMB310



Absolute multiturn encoder with solid shaft


MULTITURN ENCODER WETLINE

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12, axial; coding: A; Contacts: 5; Moulded body: stainless steel (1.4401 / 316)



1	UB
2	SSC1.2 / IN
3	GND
4	IO-Link
5	n. c.