


SBT633



Flow transmitters with fast response time

SBT34XKX10KG/O/US

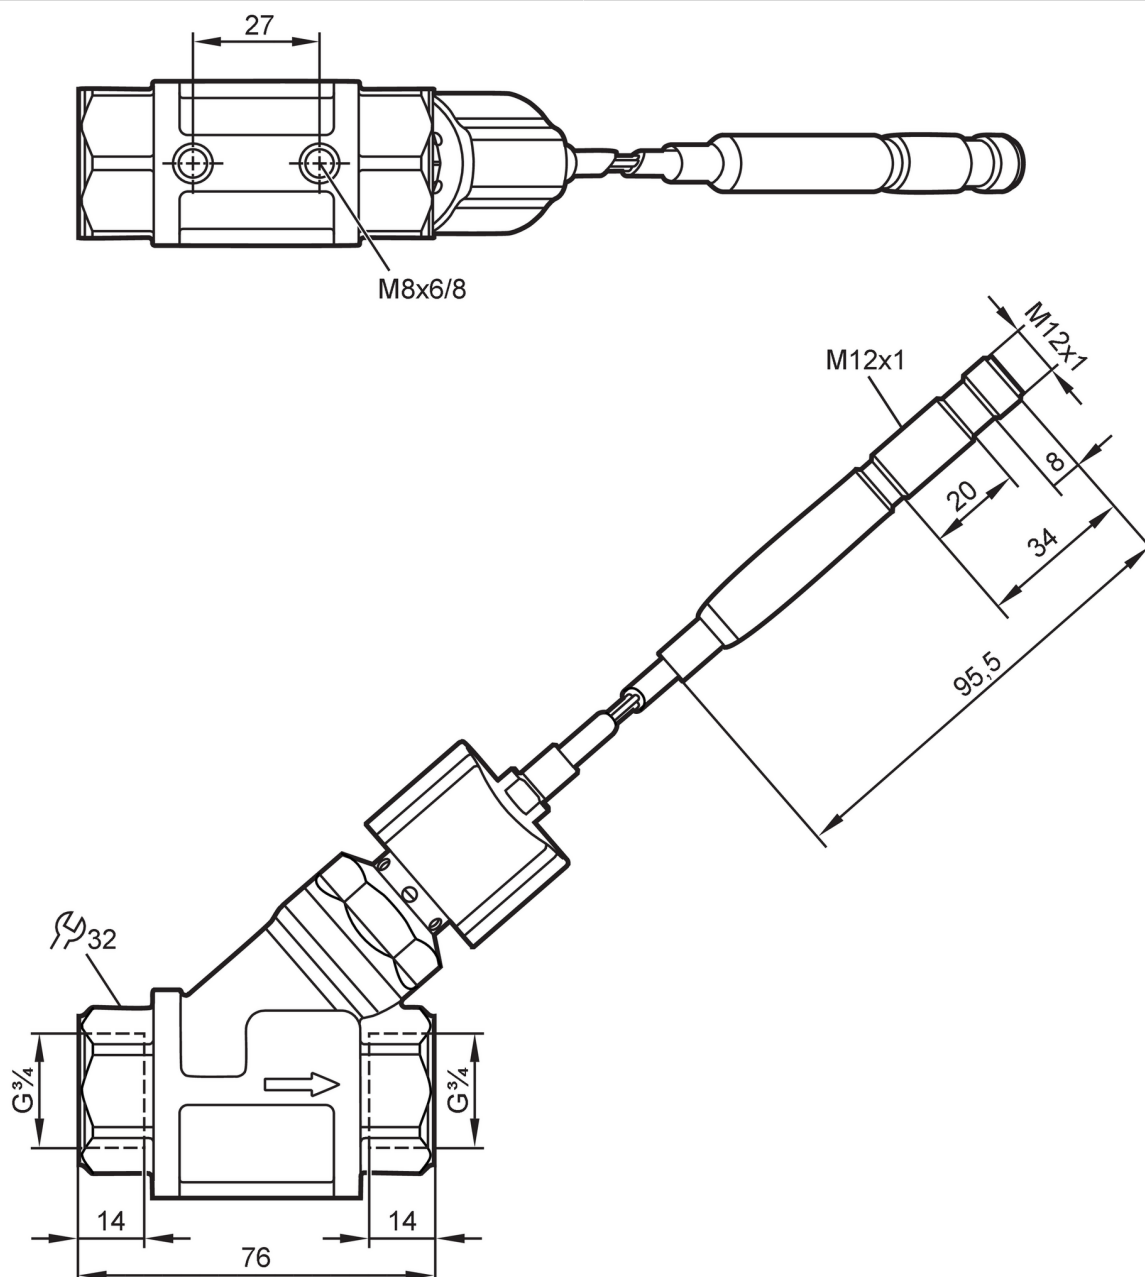

Product characteristics

Measuring range	[l/min]	0.3...25
Process connection		threaded connection G 3/4 Internal thread

Application

Media		Liquids; water
Medium temperature	[°C]	10...180
Pressure rating	30 bar	3 MPa
Note on pressure rating		static

Electrical data

Operating voltage tolerance	[%]	-15...10
-----------------------------	-----	----------



Flow transmitters with fast response time

SBT34XXK10KG/O/US

Operating voltage	[V]	24 DC; (to SELV/PELV)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes
Outputs		
Output signal		analog signal
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes
Measuring/setting range		
Measuring range	[l/min]	0.3...25
Accuracy / deviations		
Repeatability		1
	[% of the final value]	
Measuring error		± 5
	[% of the final value]	
Reaction times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC		DIN EN 61000-6-2
		DIN EN 61000-6-3
Shock resistance		20 g (11 ms)
Vibration resistance		5 g (10...2000 Hz)
MTTF	[years]	1380
Mechanical data		
Weight	[g]	680.05
Material		brass white bronze coated; PPS; copper alloy; aluminum anodized; PEI; silicone; O-ring: EPDM; FKM
Materials (wetted parts)		stainless steel (1.4401 / 316); stainless steel (1.4301 / 304); brass; brass chemically nickel-plated; PPS; O-ring: FKM; magnet: Metalllegierung nickel-plated; Two-component adhesive
Process connection		threaded connection G 3/4 Internal thread
Switching cycles mechanical		10 million
Remarks		
Remarks		Recommendation Use 200 micron filtration All data refer to water (20 °C).
Pack quantity		1 pcs.

SBT633



Flow transmitters with fast response time

SBT34XKX10KG/O/US


Electrical connection

Cable: 0.3 m, silicone

Connector: 1 x M12; coding: A




Connection

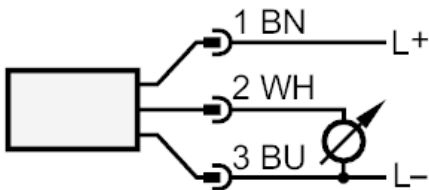

Colors to DIN EN 60947-5-2
Core colors :
BN = brown
BU = blue
WH = white

Diagrams and graphs

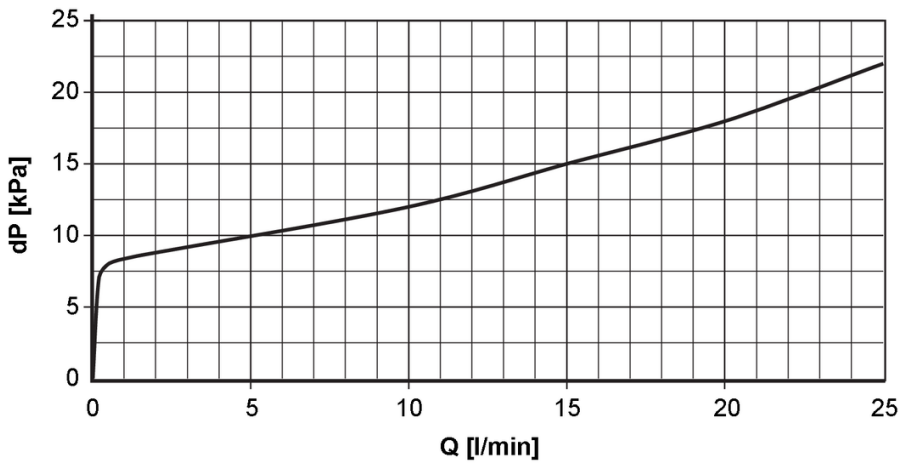

dP Pressure loss
Q volumetric flow quantity