


SD8500



Compressed air meter

SDR11DGXFRKG/US-100

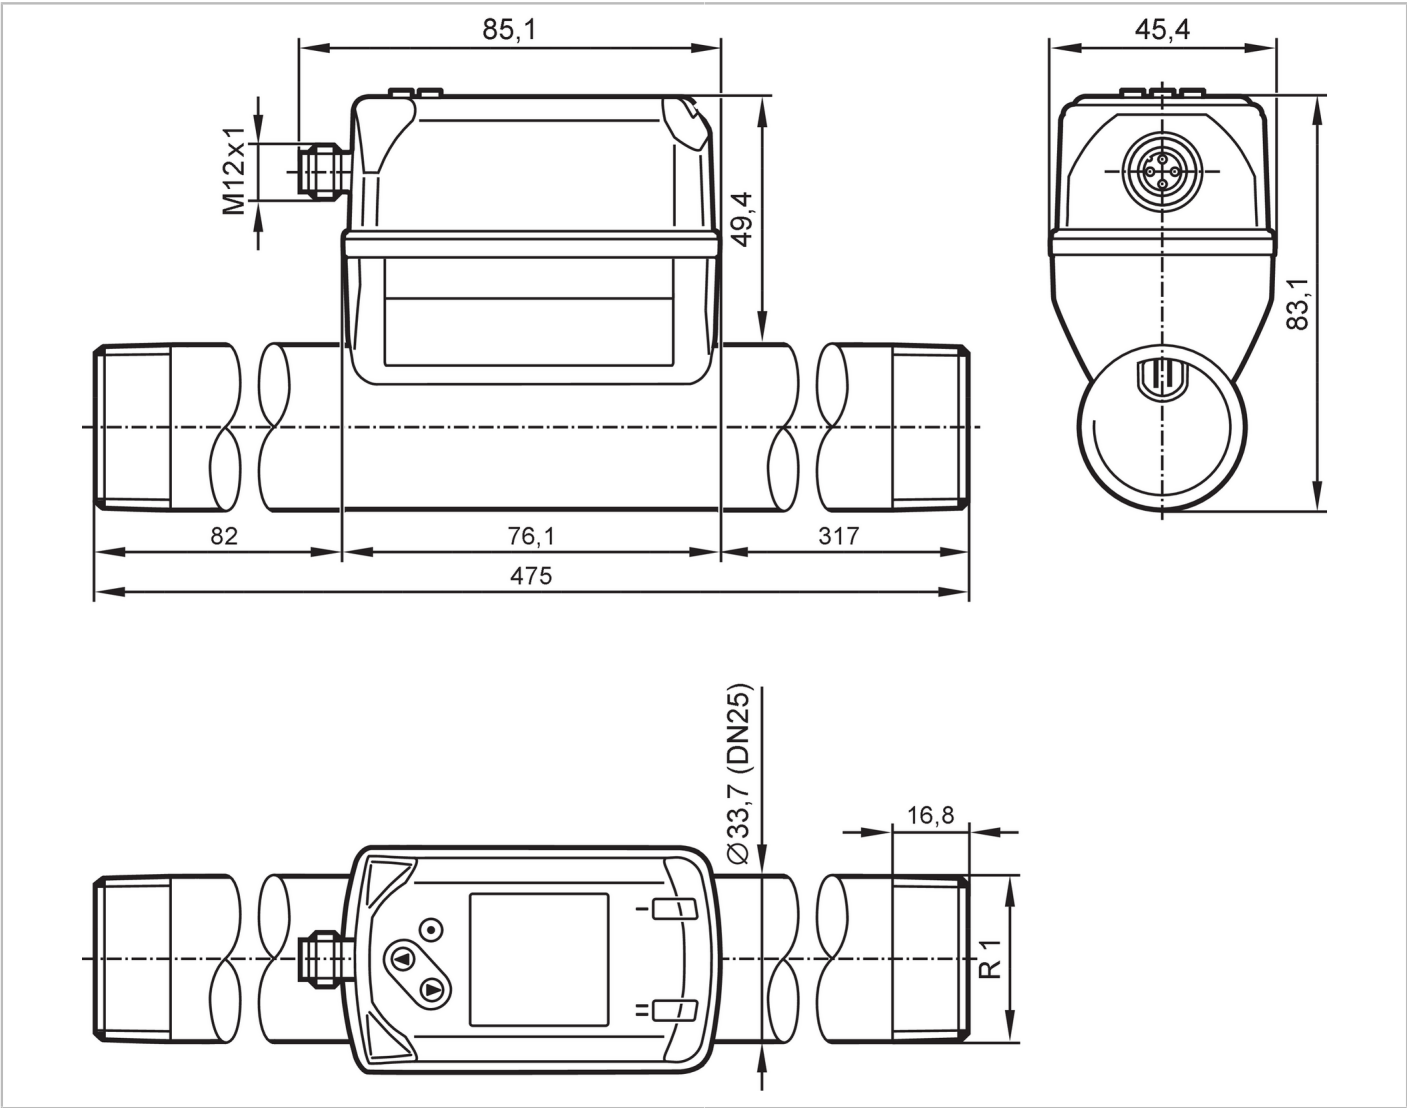

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1		
Measuring range	14...3750 l/min	0.4...103.7 m/s	0.8...225 m³/h
Process connection	threaded connection R 1 external thread DN25		

Application

Application	for industrial applications	
Media	compressed air	
Medium temperature [°C]	-10...60	
Min. burst pressure	64 bar	6.4 MPa
Pressure rating	16 bar	1.6 MPa
MAWP (for applications according to CRN) [bar]	10.5	

Electrical data

Operating voltage [V]	18...30 DC; (to SELV/PELV)		
Current consumption [mA]	< 80		

SD8500



Compressed air meter

SDR11DGXFRKG/US-100

Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	1

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
------------------------------	---

Inputs

Inputs	counter reset
--------	---------------

Outputs

Output signal	switching signal; analog signal; pulse signal; IO-Link; (configurable)
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	150; (per output)
Number of analog outputs	1
Analog current output [mA]	4...20; (scalable)
Max. load [Ω]	500
Pulse output	consumed quantity meter
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Measuring/setting range

Measuring range	14...3750 l/min	0.4...103.7 m/s	0.8...225 m³/h
Display range	0...4500 l/min	0...124.4 m/s	0...270 m³/h
Resolution	2 l/min	0.1 m/s	0.1 m³/h
Set point SP	32...3749 l/min	0.9...103.7 m/s	1.9...224.9 m³/h
Reset point rP	14...3730 l/min	0.4...103.2 m/s	0.8...223.8 m³/h
Analog start point ASP	0...3000 l/min	0...83 m/s	0...180 m³/h
Analog end point AEP	750...3750 l/min	20.7...103.7 m/s	45...225 m³/h
Low flow cut-off LFC	4...40 l/min	0.1...1.1 m/s	0.3...2.4 m³/h
In steps of	1 l/min	0.1 m/s	0.1 m³/h

Pressure monitoring

Measuring range [bar]	-1...16
Display range [bar]	-1...20
Resolution [bar]	0.05
Set point SP [bar]	-0.92...16
Reset point rP [bar]	-1...15.92
Analog start point [bar]	-1...12.8
Analog end point [bar]	2.2...16
In steps of [bar]	0.01

Volumetric flow quantity monitoring

Measuring range	0...100000000 m³	0...353146667.2 scf
-----------------	------------------	---------------------

SD8500



Compressed air meter

SDR11DGXFRKG/US-100

Display range	0...100000000 m³	0...353146667.2 scf
Set point SP	0.001...10000000 m³	0.05...353146667.2 scf
Pulse value	0.001...10000000 m³	0.05...353146667.2 scf
In steps of	0.0001 m³	0.005 scf
Pulse length [s]	0.007...2	
Temperature monitoring		
Measuring range	-10...60 °C	14...140 °F
Display range	-24...74 °C	-11.2...165.2 °F
Resolution	0.2 °C	0.5 °F
Set point SP	-9.7...60 °C	14.6...140 °F
Reset point rP	-10...59.7 °C	14...139.4 °F
Analog start point	-10...46 °C	14...114.8 °F
Analog end point	4...60 °C	39.2...140 °F
In steps of	0.1 °C	0.1 °F
Accuracy / deviations		
Temperature coefficient [1/K]	± 0,07 % MW	
Accuracy (in the measuring range)	class 141: ± (2 % MW + 0,5 % MEW); class 344: ± (6 % MW + 0,6 % MEW) ; air quality to ISO 8573-1:2010; at medium temperature 23 °C	
Repeatability	± (0,4 % MW + 0,1 % MEW)	
Pressure monitoring		
Repeatability [% of the final value]	± 0,2	
Characteristics deviation [% of the final value]	< ± 0,5; (BFSL = Best Fit Straight Line)	
Greatest TEMPCO of the span [% MEW / 10 K]	± 0,3	
Greatest TEMPCO of the zero point [% MEW / 10 K]	± 0,1	
Temperature monitoring		
Accuracy [K]	± 0,5; (medium flow in the limit area of the flow measurement range)	
Reaction times		
Response time [s]	< 0.1; (dAP = 0, T09)	
Damping process value dAP [s]	0...5	
Pressure monitoring		
Response time [s]	0.05	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 0,5	
Software / programming		
Parameter setting options	hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; totalizer	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	



Compressed air meter

SDR11DGXFRKG/US-100

SDCI standard		IEC 61131-9 CDV	
Profiles		Common - I&D	Identification and Diagnosis
		Function	Measurement data, standard resolution
SIO mode		yes	
Required master port class		A	
Process data analog		8	
Process data binary		2	
Min. process cycle time	[ms]	7.2	
Supported DeviceIDs		Type of operation	DeviceID
		default	866
Operating conditions			
Ambient temperature	[°C]	0...60	
Storage temperature	[°C]	-20...85	
Max. relative air humidity	[%]	90	
Protection		IP 65; IP 67	
Tests / approvals			
EMC		DIN EN 60947-5-9	
CPA approval		model number	001TG
		accuracy class	-
		maximum allowable error	± 2,5 % FS
		Q (min)	0,8 m³/h
		Q (t)	-
		Q (max)	225 m³/h
Vibration resistance		DIN EN 68000-2-6	5 g (10...2000 Hz)
MTTF	[years]	183	
UL approval		UL approval number	I012
		File number UL	E174189
Pressure equipment directive		sound engineering practice; can be used for stable gases fluid group 2	
Mechanical data			
Weight	[g]	1598.5	
Housing		rectangular	
Dimensions	[mm]	475 x 45.4 x 83.1	
Material		PBT+PC-GF30; PPS GF40; stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); steel (1.5523) galvanized; 2.0401 (brass / CW614N); FKM	
Materials (wetted parts)		stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate	
Process connection		threaded connection R 1 external thread DN25	
Displays / operating elements			
Display			Color display 1,44", 128 x 128 pixels
			2 x LED, yellow
Remarks			
Remarks		MW = Measured value	
		MEW = Final value of the measuring range	
		Measuring, display and setting ranges refer to standard volume flow according to DIN ISO 2533.	
		For information about installation and operation please see the operating instructions.	

SD8500



Compressed air meter

SDR11DGXFRKG/US-100

Pack quantity


1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



Connection

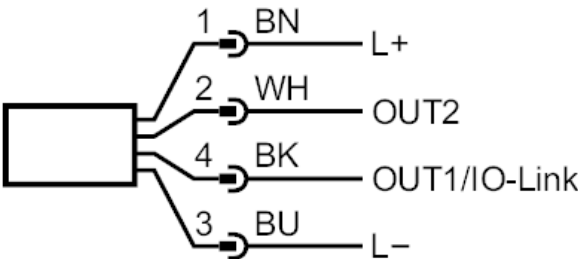

- OUT1/IO-Link:
- Switching output flow
Switching output temperature
Switching output pressure
Pulse output quantity meter
signal output Preset counter
- OUT2/InD:
- Switching output flow
Switching output temperature
Switching output pressure
analog output flow
analog output temperature
analog output pressure
signal output Preset counter
Pulse output quantity meter
Input counter reset