


SD8600



Industrial gas counter

SDR11DGXFRKG/US-100

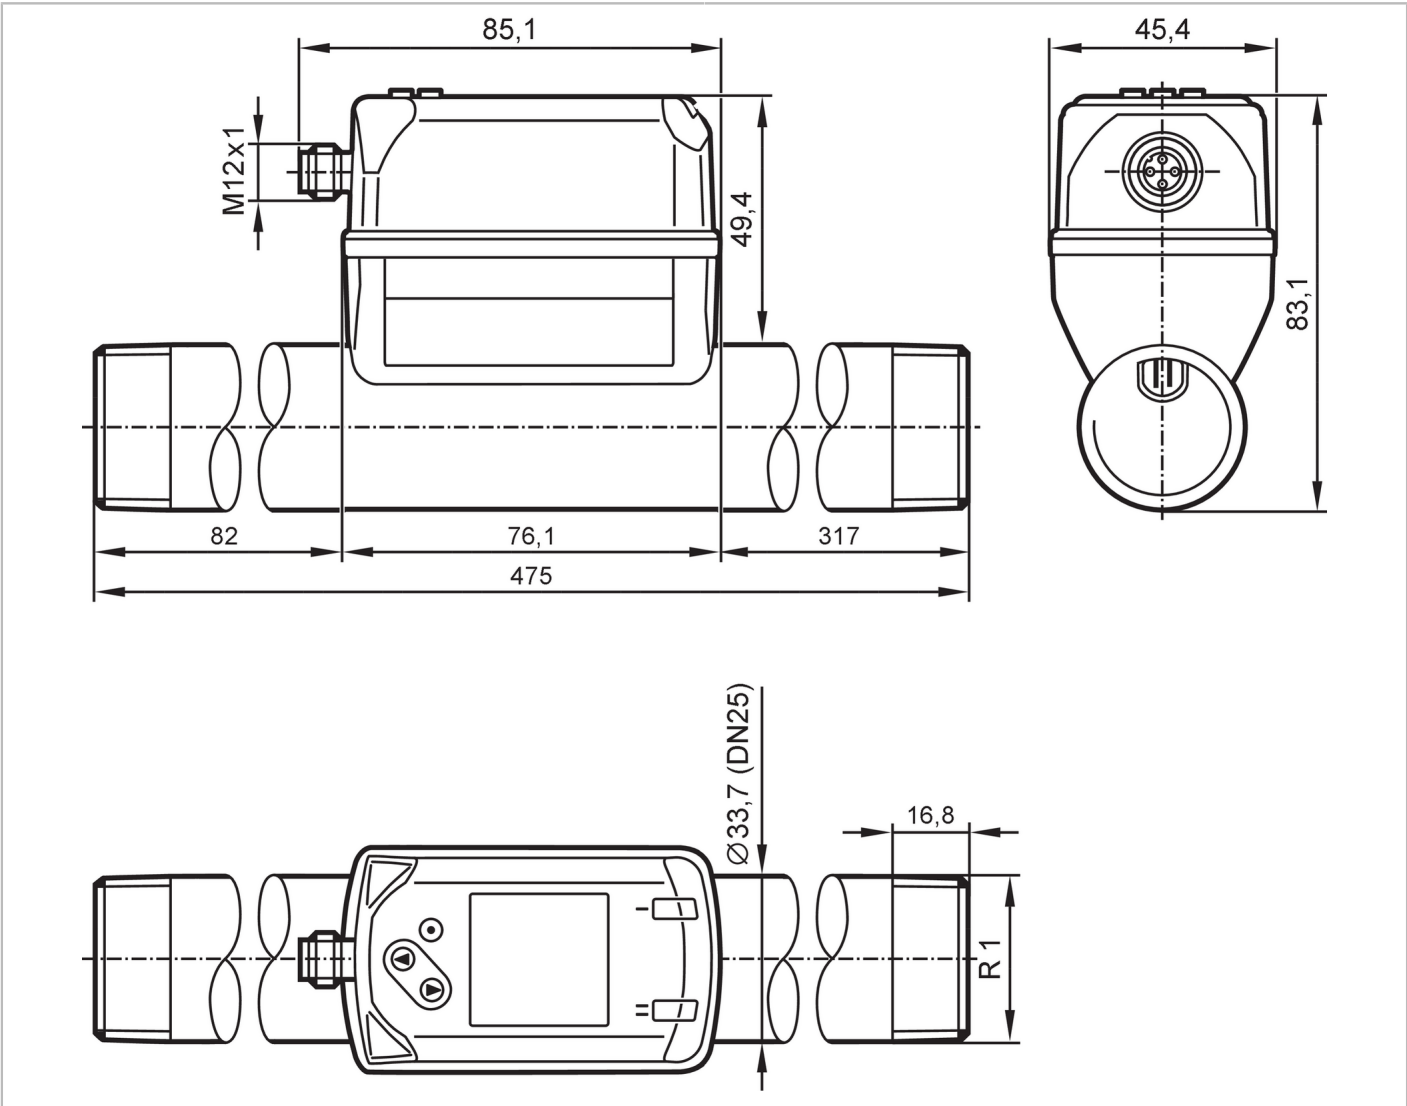

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1		
Measuring range	14...3750 l/min	0.4...103.7 m/s	0.8...225 m³/h
Process connection	threaded connection R 1 external thread DN25		

Application

Application	for industrial applications	
Media	Argon (Ar); carbon dioxide (CO2); nitrogen (N2); compressed air	
Medium temperature [°C]	-10...60	
Min. burst pressure	64 bar	6.4 MPa
Pressure rating	16 bar	1.6 MPa
MAWP (for applications according to CRN) [bar]	10.5	

Electrical data

Operating voltage [V]	18...30 DC; (to SELV/PELV)		
Current consumption [mA]	< 80		

SD8600



Industrial gas counter

SDR11DGXFRKG/US-100

Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	1

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
------------------------------	---

Inputs

Inputs	counter reset
--------	---------------

Outputs

Output signal	switching signal; analog signal; pulse signal; IO-Link; (configurable)
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	150; (per output)
Number of analog outputs	1
Analog current output [mA]	4...20; (scalable)
Max. load [Ω]	500
Pulse output	consumed quantity meter
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Measuring/setting range

Measuring range	14...3750 l/min	0.4...103.7 m/s	0.8...225 m³/h
Display range	0...4500 l/min	0...124.4 m/s	0...270 m³/h
Resolution	2 l/min	0.1 m/s	0.1 m³/h
Set point SP	32...3749 l/min	0.9...103.7 m/s	1.9...224.9 m³/h
Reset point rP	14...3730 l/min	0.4...103.2 m/s	0.8...223.8 m³/h
Analog start point ASP	0...3000 l/min	0...83 m/s	0...180 m³/h
Analog end point AEP	750...3750 l/min	20.7...103.7 m/s	45...225 m³/h
Low flow cut-off LFC	4...40 l/min	0.1...1.1 m/s	0.3...2.4 m³/h
In steps of	1 l/min	0.1 m/s	0.1 m³/h

Pressure monitoring

Measuring range [bar]	-1...16
Display range [bar]	-1...20
Resolution [bar]	0.05
Set point SP [bar]	-0.92...16
Reset point rP [bar]	-1...15.92
Analog start point [bar]	-1...12.8
Analog end point [bar]	2.2...16
In steps of [bar]	0.01

Volumetric flow quantity monitoring

Measuring range	0...100000000 m³	0...353146667.2 scf
-----------------	------------------	---------------------



Industrial gas counter

SDR11DGXFRKG/US-100

Display range	0...100000000 m ³	0...353146667.2 scf
Set point SP	0.001...10000000 m ³	0.05...353146667.2 scf
Pulse value	0.001...10000000 m ³	0.05...353146667.2 scf
In steps of	0.0001 m ³	0.005 scf
Pulse length [s]	0.007...2	

Temperature monitoring		
Measuring range	-10...60 °C	14...140 °F
Display range	-24...74 °C	-11.2...165.2 °F
Resolution	0.2 °C	0.5 °F
Set point SP	-9.7...60 °C	14.6...140 °F
Reset point rP	-10...59.7 °C	14...139.4 °F
Analog start point	-10...46 °C	14...114.8 °F
Analog end point	4...60 °C	39.2...140 °F
In steps of	0.1 °C	0.1 °F

Accuracy / deviations		
Temperature coefficient [1/K]	± 0,07 % MW	
Accuracy (in the measuring range)	± (6 % MW + 0,6 % MEW); at medium temperature 23 °C	
Repeatability	± (0,4 % MW + 0,1 % MEW)	

Pressure monitoring		
Repeatability [% of the final value]	± 0,2	
Characteristics deviation [% of the final value]	< ± 0,5; (BFSL = Best Fit Straight Line)	
Greatest TEMPCO of the span [% MEW / 10 K]	± 0,3	
Greatest TEMPCO of the zero point [% MEW / 10 K]	± 0,1	

Temperature monitoring		
Accuracy [K]	± 0,5; (medium flow in the limit area of the flow measurement range)	

Reaction times		
Response time [s]	< 0.1; (dAP = 0, T09)	
Damping process value dAP [s]	0...5	

Pressure monitoring		
Response time [s]	0.05	

Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 0,5	

Software / programming		
Parameter setting options	hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; totalizer	

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	

SD8600



Industrial gas counter

SDR11DGXFRKG/US-100

Profiles	Common - I&D	Identification and Diagnosis
	Function	Measurement data, standard resolution
SIO mode		yes
Required master port class		A
Process data analog		8
Process data binary		2
Min. process cycle time [ms]		7.2
Supported DeviceIDs	Type of operation	DeviceID
	default	868

Operating conditions		
Ambient temperature [°C]		0...60
Storage temperature [°C]		-20...85
Max. relative air humidity [%]		90
Protection		IP 65; IP 67

Tests / approvals		
EMC	DIN EN 60947-5-9	
CPA approval	model number	003TG
	accuracy class	-
	maximum allowable error	± 7 % FS
	Q (min)	0,8 m³/h
	Q (t)	-
	Q (max)	225 m³/h
Vibration resistance	DIN EN 68000-2-6	5 g (10...2000 Hz)
MTTF [years]		183
UL approval	UL approval number	I012
	File number UL	E174189
Pressure equipment directive	sound engineering practice; can be used for stable gases fluid group 2	

Mechanical data		
Weight [g]		1530
Housing		rectangular
Dimensions [mm]		475 x 45.4 x 83.1
Material	PBT+PC-GF30; PPS GF40; stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); steel (1.5523) galvanized; 2.0401 (brass / CW614N); FKM	
Materials (wetted parts)	stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate	
Process connection	threaded connection R 1 external thread DN25	

Displays / operating elements		
Display		Color display 1,44", 128 x 128 pixels
		2 x LED, yellow

Remarks		
Remarks	MW = Measured value	
	MEW = Final value of the measuring range	
	Standard conditions: 1013.25 mbar / 15 °C / 0 % relative humidity	
	For information about installation and operation please see the operating instructions.	
Pack quantity	1 pcs.	

SD8600



Industrial gas counter


SDR11DGXFRKG/US-100

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



Connection

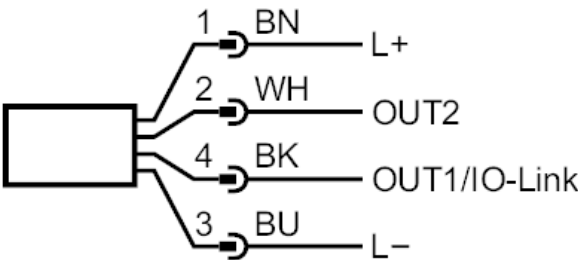

- OUT1/IO-Link:

Switching output flow
Switching output temperature
Switching output pressure
Pulse output quantity meter
signal output Preset counter
- OUT2/InD:

Switching output flow
Switching output temperature
Switching output pressure
analog output flow
analog output temperature
analog output pressure
signal output Preset counter
Pulse output quantity meter
Input counter reset