

# SM7420




## Magnetic-inductive flow meter

SMK34XGXFRKG/US-100

Alternative articles: SM7400

When selecting an alternative article and accessories please note that technical data may differ!

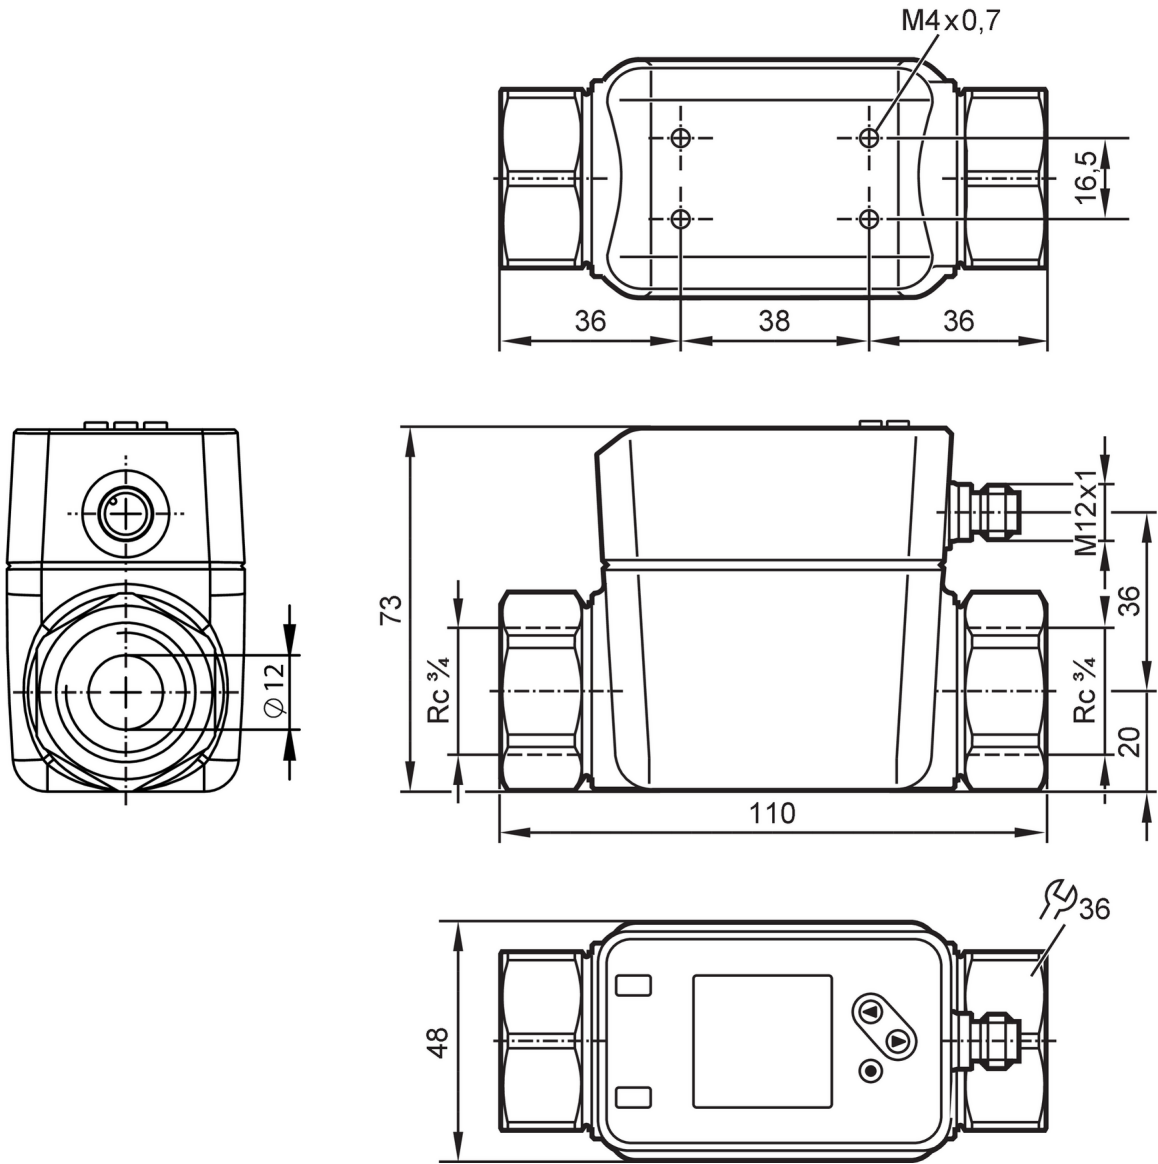

### Product characteristics

|                              |                                                           |                  |
|------------------------------|-----------------------------------------------------------|------------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analog outputs: 1 |                  |
| Measuring range              | 0.1...75 l/min                                            | 0.006...4.5 m³/h |
| Process connection           | threaded connection Rc 3/4 Internal thread DN20           |                  |

### Application

|                         |                                                                                           |         |
|-------------------------|-------------------------------------------------------------------------------------------|---------|
| Special feature         | gold-plated contacts                                                                      |         |
| Media                   | Conductive liquids; water; water-based media                                              |         |
| Note on media           | conductivity: $\geq 20 \mu\text{S/cm}$<br>viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C) |         |
| Medium temperature [°C] | -20...90                                                                                  |         |
| Pressure rating         | 16 bar                                                                                    | 1.6 MPa |

# SM7420



## Magnetic-inductive flow meter

SMK34XGXFRKG/US-100

| Electrical data                                 |                  |                                                                                          |
|-------------------------------------------------|------------------|------------------------------------------------------------------------------------------|
| Operating voltage                               | [V]              | 18...30 DC; (to SELV/PELV)                                                               |
| Current consumption                             | [mA]             | < 80                                                                                     |
| Protection class                                |                  | III                                                                                      |
| Reverse polarity protection                     |                  | yes                                                                                      |
| Power-on delay time                             | [s]              | 5                                                                                        |
| Measuring principle                             |                  | magnetic-inductive                                                                       |
| Inputs / outputs                                |                  |                                                                                          |
| Number of inputs and outputs                    |                  | Number of digital outputs: 2; Number of analog outputs: 1                                |
| Inputs                                          |                  |                                                                                          |
| Inputs                                          |                  | counter reset                                                                            |
| Outputs                                         |                  |                                                                                          |
| Total number of outputs                         |                  | 2                                                                                        |
| Output signal                                   |                  | switching signal; analog signal; pulse signal; IO-Link; frequency signal; (configurable) |
| Electrical design                               |                  | PNP/NPN                                                                                  |
| Number of digital outputs                       |                  | 2                                                                                        |
| Output function                                 |                  | normally open / closed; (configurable)                                                   |
| Max. voltage drop switching output DC           | [V]              | 2                                                                                        |
| Permanent current rating of switching output DC | [mA]             | 100                                                                                      |
| Number of analog outputs                        |                  | 1                                                                                        |
| Analog current output                           | [mA]             | 4...20; (scalable)                                                                       |
| Max. load                                       | [Ω]              | 500                                                                                      |
| Pulse output                                    |                  | flow rate meter                                                                          |
| Short-circuit protection                        |                  | yes                                                                                      |
| Type of short-circuit protection                |                  | yes (non-latching)                                                                       |
| Overload protection                             |                  | yes                                                                                      |
| Measuring/setting range                         |                  |                                                                                          |
| Measuring range                                 | 0.1...75 l/min   | 0.006...4.5 m³/h                                                                         |
| Display range                                   | -90...90 l/min   | -5.4...5.4 m³/h                                                                          |
| Resolution                                      | 0.1 l/min        | 0.006 m³/h                                                                               |
| Set point SP                                    | 0.5...75 l/min   | 0.03...4.5 m³/h                                                                          |
| Reset point rP                                  | 0.1...74.6 l/min | 0.006...4.48 m³/h                                                                        |
| Analog start point ASP                          | 0...59.9 l/min   | 0...3.6 m³/h                                                                             |
| Analog end point AEP                            | 15.1...75 l/min  | 0.9...4.5 m³/h                                                                           |
| Low flow cut-off LFC                            | 0.1...3.8 l/min  | 0.006...0.23 m³/h                                                                        |
| Frequency end point, FEP                        | 15.1...75 l/min  | 0.9...4.5 m³/h                                                                           |
| Frequency at the end point FRP                  | [Hz]             | 1...10000                                                                                |
| Volumetric flow quantity monitoring             |                  |                                                                                          |
| Pulse length                                    | [s]              | 0.003...2                                                                                |
| Pulse value                                     |                  | 0.01...99990000 l                                                                        |



## Magnetic-inductive flow meter

SMK34XGXFRKG/US-100

|                                   |                                                                                                                                                                |                                       |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| Temperature monitoring            |                                                                                                                                                                |                                       |
| Measuring range                   | [°C]                                                                                                                                                           | -20...90                              |
| Display range                     | [°C]                                                                                                                                                           | -42...112                             |
| Resolution                        | [°C]                                                                                                                                                           | 0.1                                   |
| Set point SP                      | [°C]                                                                                                                                                           | -19.6...90                            |
| Reset point rP                    | [°C]                                                                                                                                                           | -20...89.6                            |
| Analog start point                | [°C]                                                                                                                                                           | -20...68                              |
| Analog end point                  | [°C]                                                                                                                                                           | 2...90                                |
| In steps of                       | [°C]                                                                                                                                                           | 0.1                                   |
| Accuracy / deviations             |                                                                                                                                                                |                                       |
| Flow monitoring                   |                                                                                                                                                                |                                       |
| Accuracy (in the measuring range) |                                                                                                                                                                | ± (0,8 % MW + 0,2 % MEW)              |
| Repeatability                     |                                                                                                                                                                | ± 0,2 % MEW                           |
| Temperature monitoring            |                                                                                                                                                                |                                       |
| Accuracy                          | [K]                                                                                                                                                            | ± 2,5 (Q > 5 % MEW)                   |
| Reaction times                    |                                                                                                                                                                |                                       |
| Flow monitoring                   |                                                                                                                                                                |                                       |
| Start-up delay                    | [s]                                                                                                                                                            | 0...50                                |
| Response time                     | [s]                                                                                                                                                            | < 0.25; (dAP = 0, T09)                |
| Damping process value dAP         | [s]                                                                                                                                                            | 0...5                                 |
| Temperature monitoring            |                                                                                                                                                                |                                       |
| Response time                     | [s]                                                                                                                                                            | 15; (Q > 10 % MEW, T09)               |
| Software / programming            |                                                                                                                                                                |                                       |
| Parameter setting options         | hysteresis / window; normally open / closed; switching logic; Frequency output; current/pulse output; Start-up delay; display can be deactivated; Display unit |                                       |
| Interfaces                        |                                                                                                                                                                |                                       |
| Communication interface           | IO-Link                                                                                                                                                        |                                       |
| Transmission type                 | COM2 (38,4 kBaud)                                                                                                                                              |                                       |
| IO-Link revision                  | 1.1                                                                                                                                                            |                                       |
| SDCI standard                     | IEC 61131-9                                                                                                                                                    |                                       |
| Profiles                          | Common - I&D                                                                                                                                                   | Identification and Diagnosis          |
|                                   | Function                                                                                                                                                       | Measurement data, standard resolution |
| SIO mode                          | yes                                                                                                                                                            |                                       |
| Required master port class        | A                                                                                                                                                              |                                       |
| Process data analog               | 3                                                                                                                                                              |                                       |
| Process data binary               | 2                                                                                                                                                              |                                       |
| Min. process cycle time           | [ms]                                                                                                                                                           | 8                                     |
| Supported DeviceIDs               | Type of operation                                                                                                                                              | DeviceID                              |
|                                   | default                                                                                                                                                        | 960                                   |
| Operating conditions              |                                                                                                                                                                |                                       |
| Ambient temperature               | [°C]                                                                                                                                                           | -20...60                              |
| Storage temperature               | [°C]                                                                                                                                                           | -25...80                              |
| Protection                        | IP 65; IP 67                                                                                                                                                   |                                       |

# SM7420



## Magnetic-inductive flow meter

SMK34XGXFRKG/US-100

| Tests / approvals                                                                   |                                                                                       |                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------|
| EMC                                                                                 | DIN EN 60947-5-9                                                                      |                                       |
| CPA approval                                                                        | model number                                                                          | 006MI                                 |
|                                                                                     | accuracy class                                                                        | -                                     |
|                                                                                     | maximum allowable error                                                               | ± 1,0 % FS                            |
|                                                                                     | Q (min)                                                                               | 0,006 m³/h                            |
|                                                                                     | Q (t)                                                                                 | -                                     |
|                                                                                     | Q (max)                                                                               | 4,5 m³/h                              |
| Shock resistance                                                                    | DIN IEC 68-2-27                                                                       | 20 g (11 ms)                          |
| Vibration resistance                                                                | DIN IEC 68-2-6:                                                                       | 5 g (10...2000 Hz)                    |
| MTTF                                                                                | [years]                                                                               | 114                                   |
| UL approval                                                                         | UL approval number                                                                    | I014                                  |
|                                                                                     | File number UL                                                                        | E174189                               |
| Pressure equipment directive                                                        | sound engineering practice; can be used for group 2 fluids; group 1 fluids on request |                                       |
| Mechanical data                                                                     |                                                                                       |                                       |
| Weight                                                                              | [g]                                                                                   | 848.7                                 |
| Housing                                                                             |                                                                                       | rectangular                           |
| Dimensions                                                                          | [mm]                                                                                  | 110 x 48 x 73                         |
| Material                                                                            | stainless steel (1.4408/316); stainless steel (1.4404 / 316L); PC; PBT+PC-GF30        |                                       |
| Materials (wetted parts)                                                            | stainless steel (1.4404 / 316L); PEEK; carbon fiber PEEK; FKM                         |                                       |
| Process connection                                                                  | threaded connection Rc 3/4 Internal thread DN20                                       |                                       |
| Displays / operating elements                                                       |                                                                                       |                                       |
| Display                                                                             |                                                                                       | Color display 1,44", 128 x 128 pixels |
|                                                                                     |                                                                                       | 2 x LED, yellow                       |
| Remarks                                                                             |                                                                                       |                                       |
| Remarks                                                                             | MW = Measured value                                                                   |                                       |
|                                                                                     | MEW = Final value of the measuring range                                              |                                       |
| Pack quantity                                                                       | 1 pcs.                                                                                |                                       |
| Electrical connection                                                               |                                                                                       |                                       |
| Connector: 1 x M12; coding: A; Contacts: 4, gold-plated                             |                                                                                       |                                       |
|  |                                                                                       |                                       |

# SM7420



## Magnetic-inductive flow meter

SMK34XGXFRKG/US-100

### Connection



|       |                                                      |
|-------|------------------------------------------------------|
| OUT1: | Colors to DIN EN 60947-5-2                           |
|       | Switching output Volumetric flow quantity monitoring |
|       | Switching output Temperature monitoring              |
|       | Pulse output quantity meter                          |
|       | Frequency output volumetric flow monitoring          |
|       | Frequency output Temperature monitoring              |
|       | signal output Preset counter                         |
| OUT2: | IO-Link                                              |
|       | Switching output Volumetric flow quantity monitoring |
|       | Switching output Temperature monitoring              |
|       | analog output flow                                   |
|       | analog output temperature                            |
|       | Input counter reset                                  |
|       | Core colors :                                        |
| BK =  | black                                                |
| BN =  | brown                                                |
| BU =  | blue                                                 |
| WH =  | white                                                |


# SM7420

## Magnetic-inductive flow meter

SMK34XGXFRKG/US-100



### Diagrams and graphs

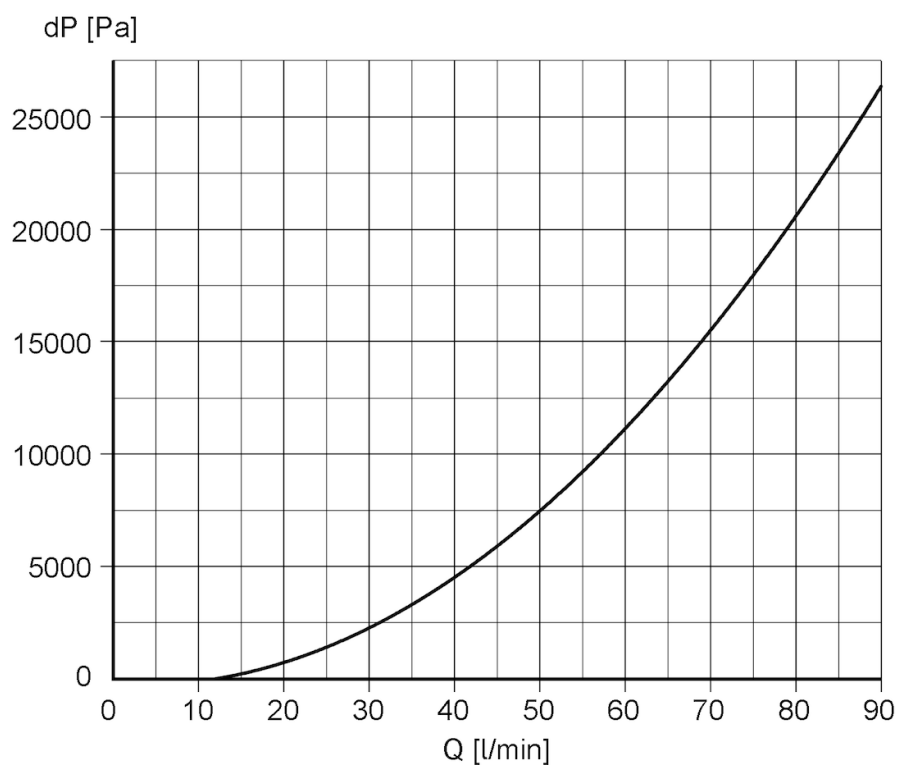

Pressure loss / volumetric flow quantity