


SUW611



Ultrasonic flow meter

SUF80IGBFRKG/US

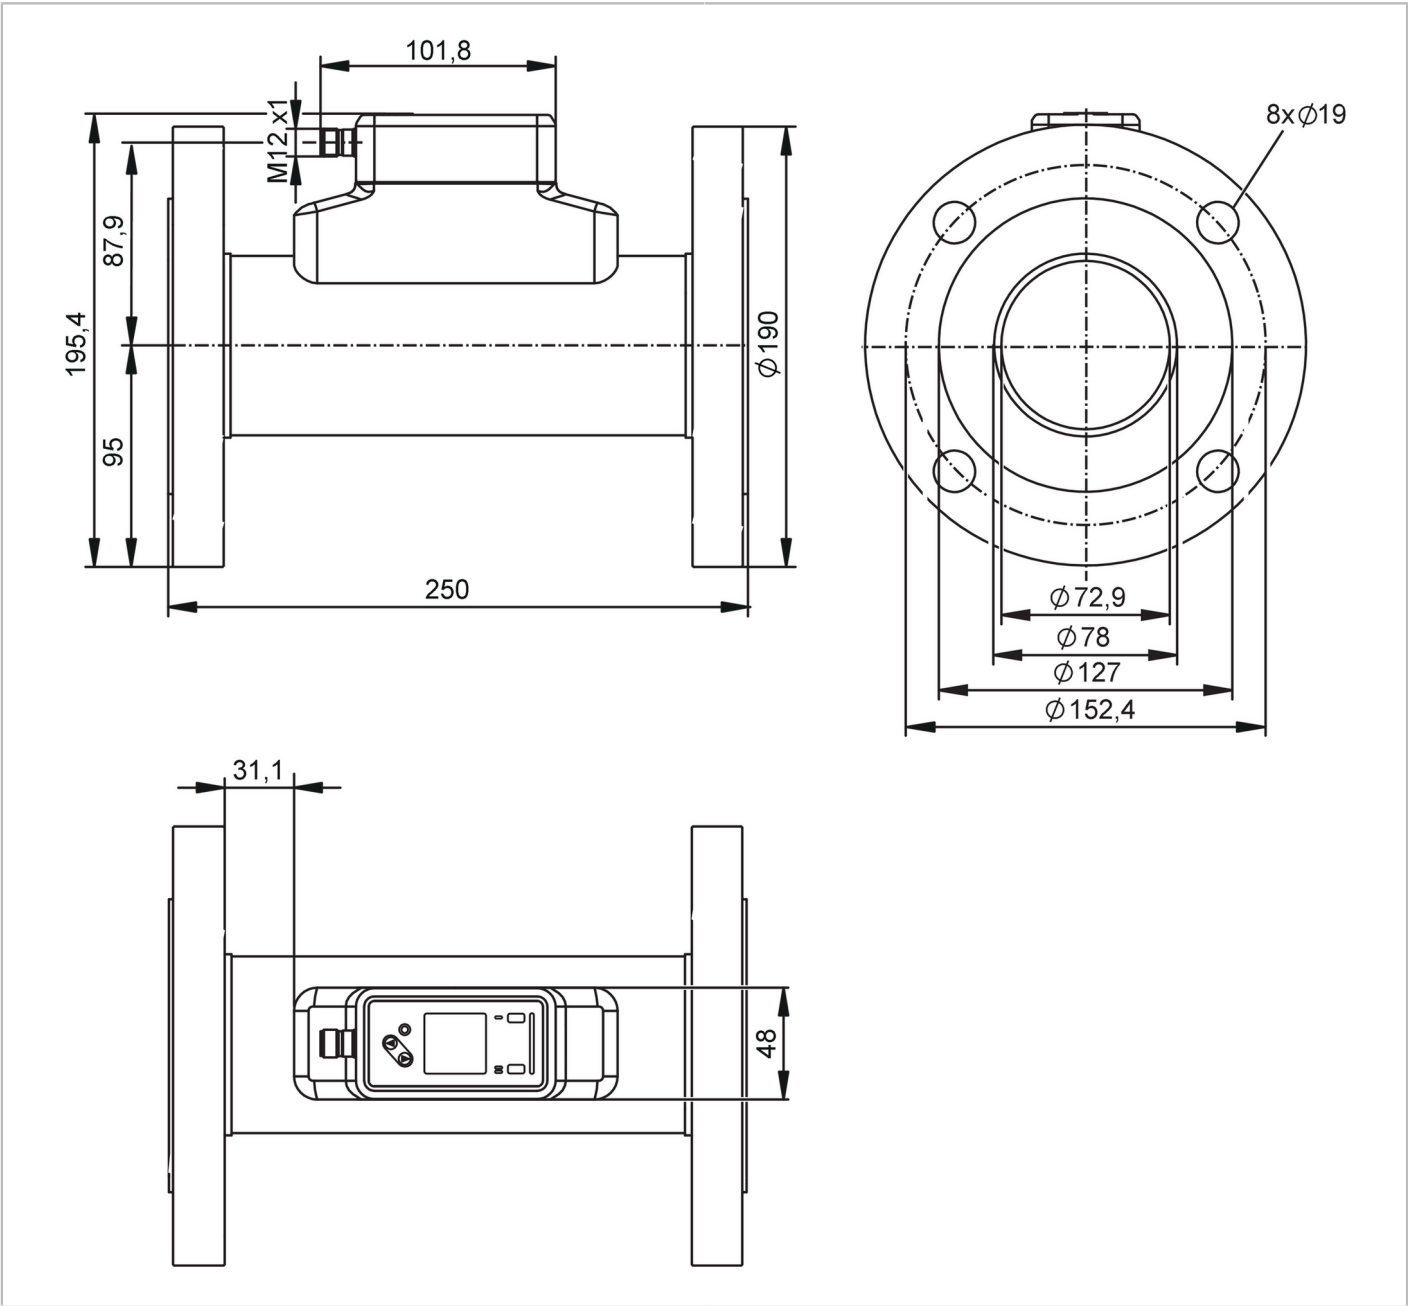

Product characteristics				
Measuring range	25...3600 l/min	1.5...216 m³/h	400...57061 gph	6.6...951 gpm
Nominal diameter	DN80 (3")			
Process connection	3" ASME B16.5 Class 150 Flange (ASME BPE)			
Application				
Special feature	gold-plated contacts			
Application	Use in industrial applications			
Media	ultra-pure water; water; water-based media			
Note on media	water-based media: for media with >10 % additives, the repeatability is the only available value			

SUW611



Ultrasonic flow meter

SUF80IGBFRKG/US

Medium temperature	[°C]	-20...100			
Min. burst pressure		40 bar	928 psi	4 MPa	
Pressure rating		16 bar	232 psi	1.6 MPa	
Vacuum resistance	[mbar]	-1000			
Electrical data					
Operating voltage	[V]	18...32 DC; (to SELV/PELV)			
Current consumption	[mA]	< 75			
Protection class		III			
Reverse polarity protection		yes			
Power-on delay time	[s]	5			
Measuring principle		ultrasonic			
Inputs / outputs					
Total number of inputs and outputs		2			
Inputs					
Inputs		OUT2	counter reset		
Outputs					
Total number of outputs		2			
Output signal		OUT1	switching signal; pulse signal; diagnostic signal; totalizer switching signal; frequency signal; IO-Link		
		OUT2	switching signal; pulse signal; diagnostic signal; totalizer switching signal; analog signal		
Electrical design		PNP/NPN			
Pulse output		flow rate meter			
Short-circuit protection		yes			
Type of short-circuit protection		yes (non-latching)			
Overload protection		yes			
Analog					
Number of analog outputs		1			
Analog current output	[mA]	4...20			
Max. load	[Ω]	500			
Digital					
Number of digital outputs		2			
Output function		normally open / closed; (configurable)			
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	100			
Switching frequency DC	[Hz]	0...10000			
Measuring/setting range					
Measuring range		25...3600 l/min	1.5...216 m³/h	400...57061 gph	6.6...951 gpm
Display range		-4320...4320 l/min	-259.2...259.2 m³/h	-68473...68473 gph	-1141.22...1141.22 gpm
Resolution		0.1 l/min	0.001 m³/h	1 gph	0.01 gpm



Ultrasonic flow meter

SUF80IGBFRKG/US

Note on factory setting	gpm, °F			
Set point SP	44.8...3600 l/min	2.7...216 m³/h	710...57061 gph	11.8...951 gpm
Reset point rP	26.1...3581.3 l/min	1.6...214.9 m³/h	413...56764 gph	6.9...946.1 gpm
Analog start point ASP	-3600...2880 l/min	-216...172.8 m³/h	-57060...45650 gph	-951...760.8 gpm
Analog end point AEP	-2880...3600 l/min	-172.8...216 m³/h	-45650...57060 gph	-760.8...951 gpm
Low flow cut-off LFC	25...180 l/min	1.5...10.8 m³/h	400...2850 gph	6.6...47.6 gpm
Frequency end point, FEP	722.2...3600 l/min	43.3...216 m³/h	11450...57060 gph	190.8...951 gpm
Frequency at the end point FRP [Hz]	1...10000			
Volumetric flow quantity monitoring				
Pulse length [s]	0.002...2			
Pulse value	0.1...99990000 l; 0.026...26414563.515 gal			
Temperature monitoring				
Measuring range	-20...100 °C		-4...212 °F	
Display range	-44...124 °C		-47.2...255.2 °F	
Resolution	0.1 °C		0.1 °F	
Set point SP	-19.6...100 °C		-3.2...212 °F	
Reset point rP	-20...99.6 °C		-4...211.2 °F	
Analog start point	-20...76 °C		-4...168.8 °F	
Analog end point	4...100 °C		39.2...212 °F	
Frequency start point, FSP	-20...76 °C		4...168.8 °F	
Frequency end point, FEP	4...100 °C		39.2...212 °F	
Frequency at the end point FRP [Hz]	1...10000			
Accuracy / deviations				
Flow monitoring				
Accuracy (in the measuring range)	water		± (2,0 % MW + 0,5 % MEW)	
Repeatability	± 0,2 % MEW			
Temperature monitoring				
Accuracy [K]	± 2,5 (Q > 5 % MEW)			
Temperature coefficient [% of the span / 10 K]	0,2			
Reaction times				
Flow monitoring				
Response time [s]	< 0.5; (dAP = 0, T09)			
Damping process value dAP [s]	0...5			
Temperature monitoring				
Dynamic response T05 / T09 [s]	5,7 / 86			
Software / programming				
Diagnostic functions	direction of flow detection; signal quality			
Interfaces				
Communication interface	IO-Link			
Transmission type	COM2 (38,4 kBaud)			
IO-Link revision	1.1			
SDCI standard	IEC 61131-9			



Ultrasonic flow meter

SUF80IGBFRKG/US

Profiles	BLOB	Binary Large Object transfer
	Common - I&D	Identification and Diagnosis
Required master port class		A
Process data analog		3
Process data binary		2
Min. process cycle time [ms]		9.6
IO-Link process data (cyclical)	Function	bit length
	totalizer	32
	Flow monitoring	32
	Temperature monitoring	32
	status	4
	Output 1	1
	Output 2	1
Supported DeviceIDs	Type of operation	DeviceID
	default	2014

Operating conditions

Ambient temperature [°C]	-20...60
Storage temperature [°C]	-25...80
Protection	IP 65; IP 67

Tests / approvals

EMC	DIN 61326-1:2021	
Shock resistance	DIN IEC 68-2-27	20 g (11ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000Hz)
UL approval	UL approval number	I033
	File number UL	E174189
Pressure equipment directive	can be used for group 2 fluids; group 1 fluids on request	

Mechanical data

Weight [g]	57.9
Housing	rectangular
Inlet pipe length	15 x DN
Outlet pipe length	3 x DN
Dimensions [mm]	250 x 190 x 195.4
Material	housing: stainless steel (1.4404 / 316L); Display: PFA; sealing Display: FKM; connector: PBT
Materials (wetted parts)	Pipe section: stainless steel (1.4435 / 316L); Process connection: stainless steel (1.4404 / 316L)
Nominal diameter	DN80 (3")
Process connection	3" ASME B16.5 Class 150 Flange (ASME BPE)
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.76 µm

Displays / operating elements

Display	Color display 1,44", 128 x 128 pixels
Switching function	2 x LED, yellow
diagnosis	1 x LED, three-color
Display unit	l/min; l/h; m³/h; m/s; gpm; gph; ft/s

SUW611



Ultrasonic flow meter

SUF80IGBFRKG/US


Accessories	
Items supplied	package insert
Remarks	
Remarks	MW = Measured value
	MEW = Final value of the measuring range
	pulse and totalizer signal are only available for one of the two outputs
	the specified Ra surface characteristics of the wetted surfaces do not apply to the weld seam.
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



Connection

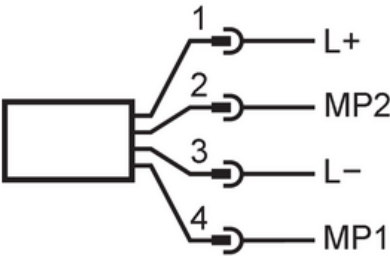

1 (L+)	L+	
2 (OUT2)	MP2	DO2, AO, DI
3 (L-)	L-	
4 (OUT1)	MP1	DO1, FO, IO-Link

AO: analog output; DI: digital input; DO: digital output; FO: Frequency output; MP: multi-function connection


SUW611

Ultrasonic flow meter

SUF80IGBFRKG/US



Diagrams and graphs

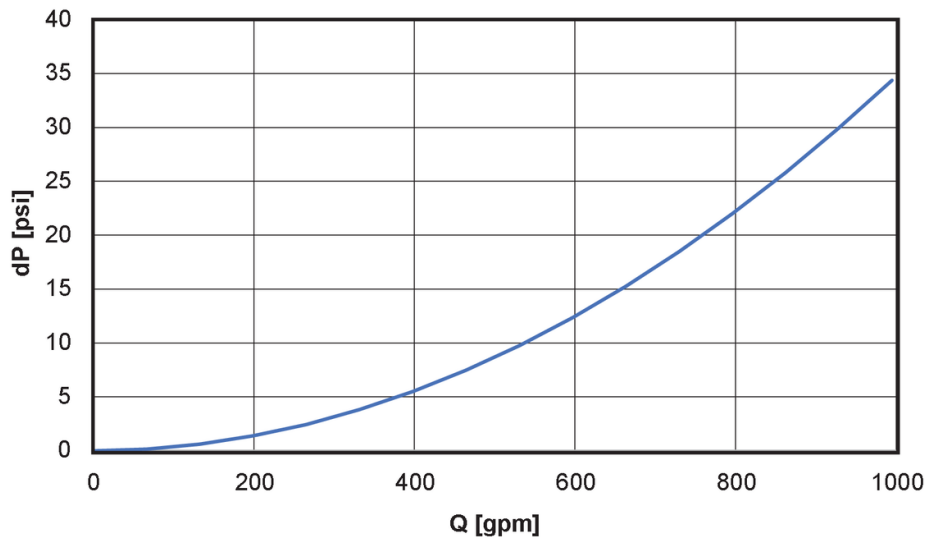

dP Pressure loss
[psi]
Q volumetric flow quantity
[gpm]