


TS2229



Temperature cable sensor with bolt-on sensor

TS-PT100 CONTACT SENSOR

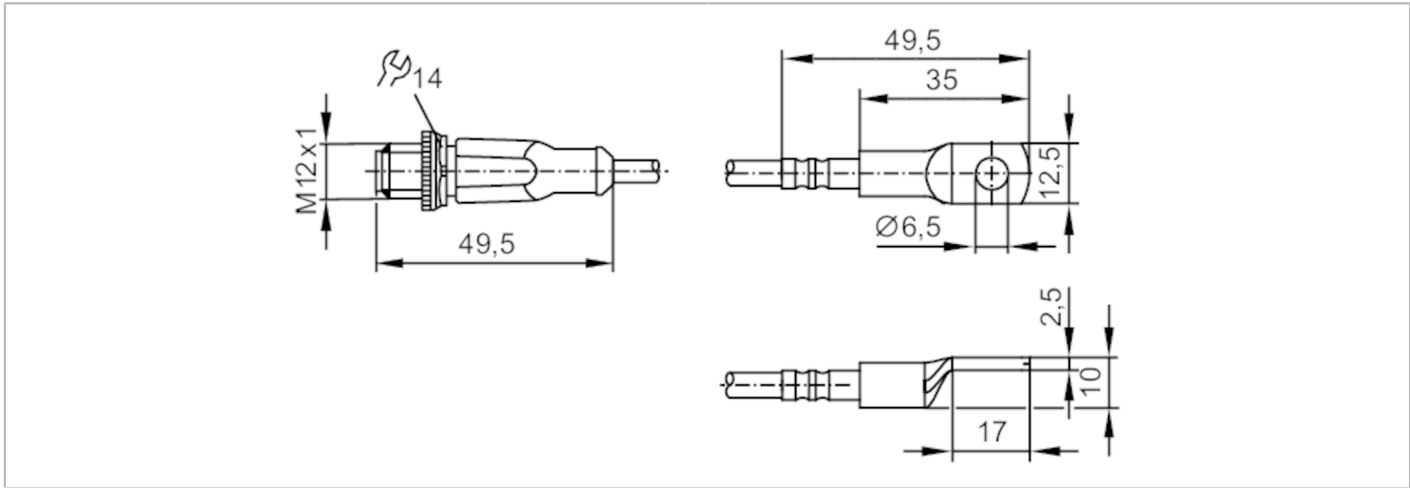

CE

DNV

DNV.COM/AF

Product characteristics		
Measuring range	-40...90 °C	-40...194 °F
Application		
Special feature	gold-plated contacts	
Measuring element	1 x Pt 100; (to DIN EN 60751, class A)	
Installation	Contact sensor for solid bodies	
Electrical data		
Insulation rating	[V]	2500; (Insulation between sensor housing and internal)
Protection class		III
Measuring/setting range		
Measuring range	-40...90 °C	-40...194 °F
Accuracy / deviations		
Accuracy	[K]	± (0,15 K + 0,002 x t)
Reaction times		
Dynamic response T05 / T09	[s]	9 / 15; (Values for a flat aluminium surface (anodized) using a conductive heat paste.; reference values for moving water : 10 / 24 (< 0,1 m/s))
Operating conditions		
Protection		IP 67
Tests / approvals		
MTTF	[years]	11415.5
Mechanical data		
Weight	[g]	88.5
Housing		rectangular
Design		bolt-on sensor
Dimensions	[mm]	12 x 8.7 x 51
Material		stainless steel (1.4303 / 305 / 308); copper nickel-plated
Remarks		
Pack quantity		1 pcs.

TS2229



Temperature cable sensor with bolt-on sensor

TS-PT100 CONTACT SENSOR

Electrical connection

Cable: 2 m, PUR, Ø 4.9 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

