


TS2269



Temperature cable sensor with process connection

TS-200KLKD6-...../US/

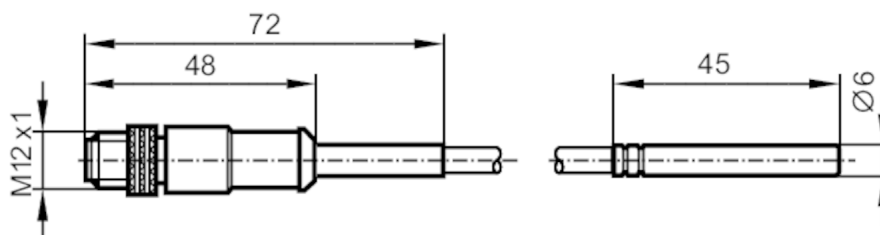

Product characteristics

Measuring range	-40...90 °C	-40...194 °F
Process connection	Clamp fitting Ø 6 mm	
Installation length EL	[mm]	45

Application

Special feature	gold-plated contacts	
Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)	
Media	liquids and gases	
Minimum installation depth	[mm]	15

Electrical data

Protection class	III	
------------------	-----	--

Measuring/setting range

Probe length L	[mm]	45
Measuring range	-40...90 °C	-40...194 °F

Accuracy / deviations

Accuracy	[K]	± (0,15 K + 0,002 x t)
----------	-----	-------------------------

Reaction times

Dynamic response T05 / T09	[s]	3 / 10; (according to DIN EN 60751)
----------------------------	-----	-------------------------------------

Operating conditions

Protection	IP 67	
------------	-------	--

Tests / approvals

MTTF	[years]	11415.5
------	---------	---------

Mechanical data

Weight	[g]	65.6
Housing	tubular	
Design	Measuring probes	
Dimensions	[mm]	Ø 6 / L = 45
Material	stainless steel	
Materials (wetted parts)	stainless steel (1.4404 / 316L)	
Process connection	Clamp fitting Ø 6 mm	
Probe diameter	[mm]	6
Installation length EL	[mm]	45

TS2269



Temperature cable sensor with process connection

TS-200KLKD6-...../US/

Remarks	
Remarks	The values for accuracy apply to flowing water.
Pack quantity	1 pcs.

Electrical connection

Cable: 2 m, PUR

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

