


Infrared temperature sensor

TW-030KLBM30-KFDKG/US



- 1 LEDs Display unit / Switching status
 2 7-segment LED display 4-digit
 3 Programming buttons

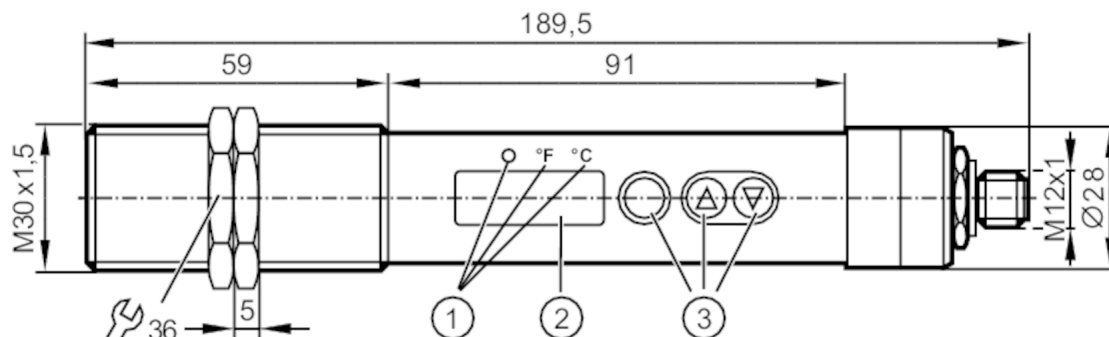

Product characteristics

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1	
Measuring range	-30...300 °C	-22...572 °F
Communication interface	IO-Link	

Application

Application	asphalt; coated metal; liquids; glass; rubber; wood; ceramics; plastics; lacquers; food products; paper; fabric
-------------	--

Electrical data

Operating voltage [V]	18...32 DC; (to SELV/PELV)
Current consumption [mA]	< 50
Min. insulation resistance [MΩ]	100; (50 V DC)
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 1

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1
------------------------------	---

Inputs

Test input	type 3 (IEC 61131-2)
------------	----------------------

Outputs

Total number of outputs	2
Output signal	switching signal; analog signal; IO-Link; (configurable)
Electrical design	PNP
Number of digital outputs	1
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	150
Number of analog outputs	1
Analog current output [mA]	4...20



Infrared temperature sensor

TW-030KLB30-KFDKG/US

Max. load	[Ω]	500
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Short-circuit proof		yes
Overload protection		yes
Monitoring range		
Wave length range	[μm]	8...14
Measuring/setting range		
Measuring range	-30...300 °C	-22...572 °F
Set point SP	-29...300 °C	-20.2...572 °F
Reset point rP	-30...299 °C	-22...570.2 °F
Analog start point	-30...250 °C	-22...482 °F
Analog end point	20...300 °C	68...572 °F
In steps of	0.5 °C	1 °F
Resolution		
Resolution of switching output	[K]	0.5
Resolution of analog output	[K]	0.2; (+ 0.03 % of the set measuring span)
Resolution of display	[K]	0.5
Accuracy / deviations		
Accuracy	[K]	< ± 1 %; (of measured value, min. 2 K (degree of emission = 1, T = 23 °C))
Repeatability	[K]	1
Reaction times		
Response time	[ms]	100
Software / programming		
Adjustment of the switch point		Programming buttons
Parameter setting options		Analog range; normally open / closed; switch-on/switch-off delay; Damping; Peakhold; emissivity; simulation function
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode		yes
Required master port class		A
Process data analog		16
Process data binary		1
Min. process cycle time	[ms]	3.6
Supported DeviceIDs	Type of operation	DeviceID
	default	1502



Infrared temperature sensor

TW-030KLBM30-KFDKG/US


Operating conditions		
Ambient temperature	[°C]	0...65
Storage temperature	[°C]	-20...80
Max. relative air humidity	[%]	95; (non condensing)
Protection		IP 65
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	30 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	88.4
Mechanical data		
Weight	[g]	410.2
Housing		Threaded type
Dimensions	[mm]	M30 x 1.5 / L = 189.5
Thread designation		M30 x 1.5
Material		threaded sleeve: stainless steel (1.4305 / 303); operator interface: polyester
Lens material		front lens: Infrared transparent crystal lens with anti-reflex coating
Displays / operating elements		
Display	Display unit	2 x LED, yellow
	Switching status	1 x LED, yellow
	Function display	7-segment LED display, 4-digit
	Measured values	7-segment LED display, 4-digit
Operating elements	3	Pushbuttons
Accessories		
Items supplied		lock nuts: 2
Remarks		
Remarks	Use a screened cable to protect infrared temperature sensors from interference.	
	The screen must be connected to the housing of the sensor via the connector.	
Pack quantity		1 pcs.

Infrared temperature sensor

TW-030KLB30-KFDKG/US


Electrical connection

Connection

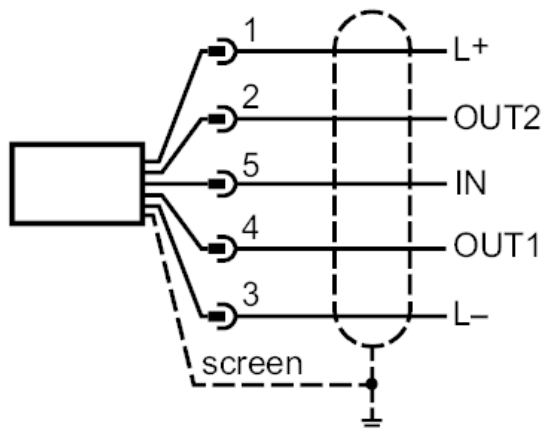


OUT1: Switching output / IO-Link
 OUT2: analog output
 IN: Test input

Connector: 1 x M12; coding: A



Diagrams and graphs

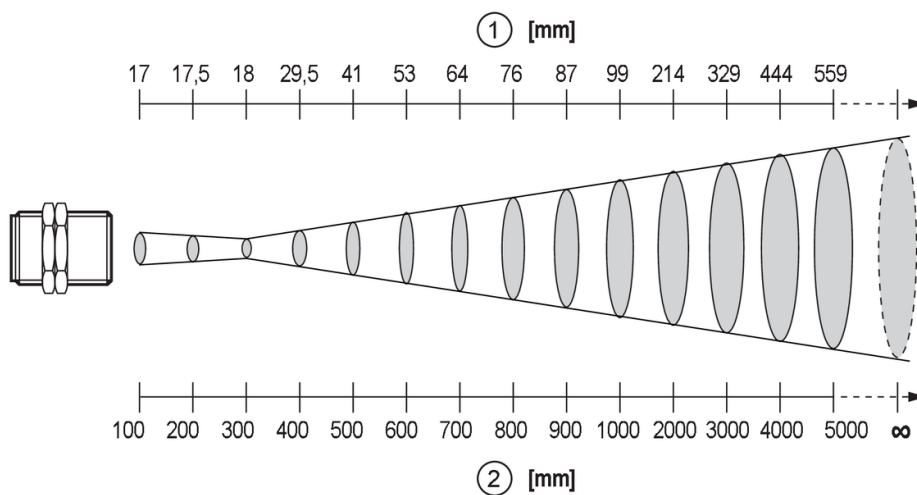

- 1 diameter of the measured spot
- 2 measuring distance