




Adapter for LB conduit

CONDUIT ADPTR, DUAL M12, 3/4"

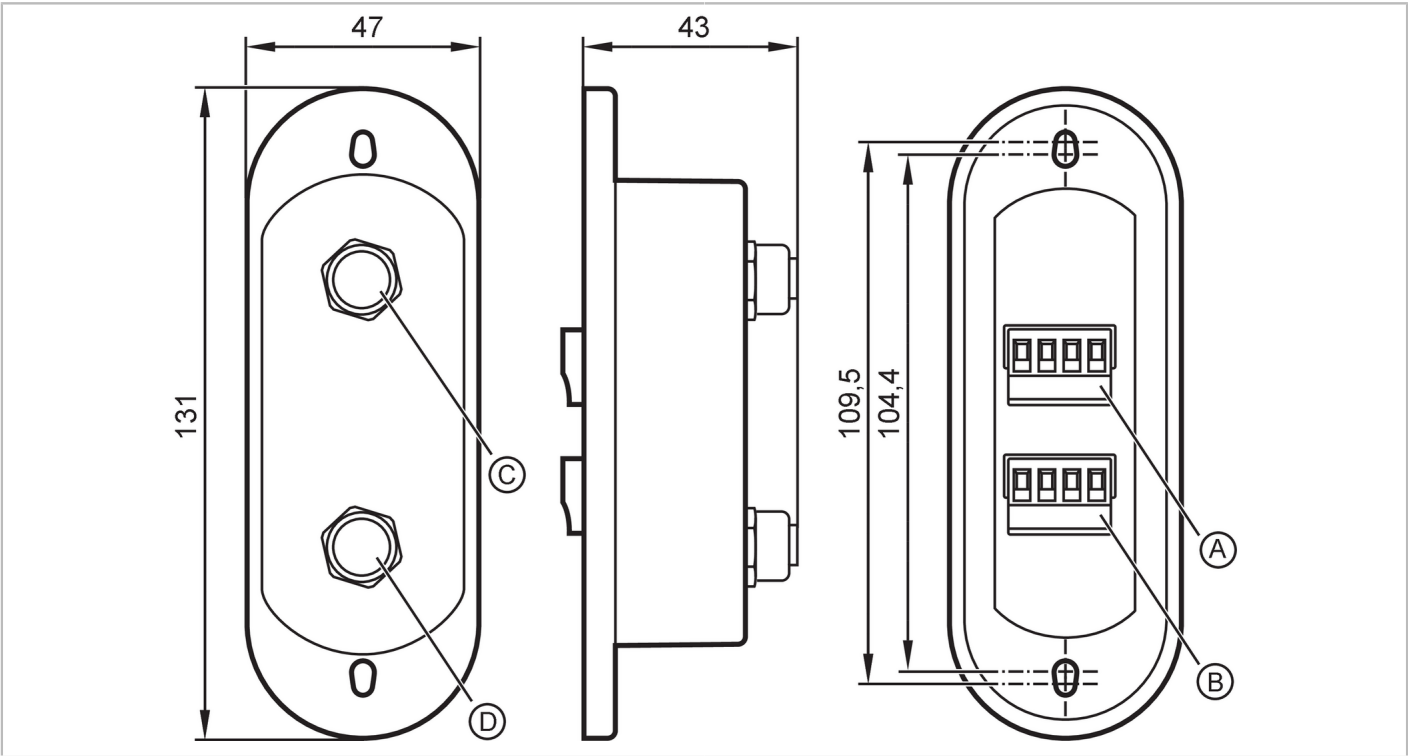

Application		
Special feature		gold-plated contacts
Application		Industrial applications
Electrical data		
Operating voltage	[V]	< 300 AC/DC
Max. current load per module/slot	[A]	4
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-40...70
Mechanical data		
Weight	[g]	272.155
Material		housing: PBT-GF20; sealing: NBR
Number of ports splitter box		2
Remarks		
Pack quantity		1 pcs.
Electrical connection - Socket		
Connector: 2 x M12; coding: A; Contacts: 4, gold-plated		



Adapter for LB conduit

CONDUIT ADPTR, DUAL M12, 3/4"

Connection

