


Article to be discontinued

Discontinuation date: 03/31/2027

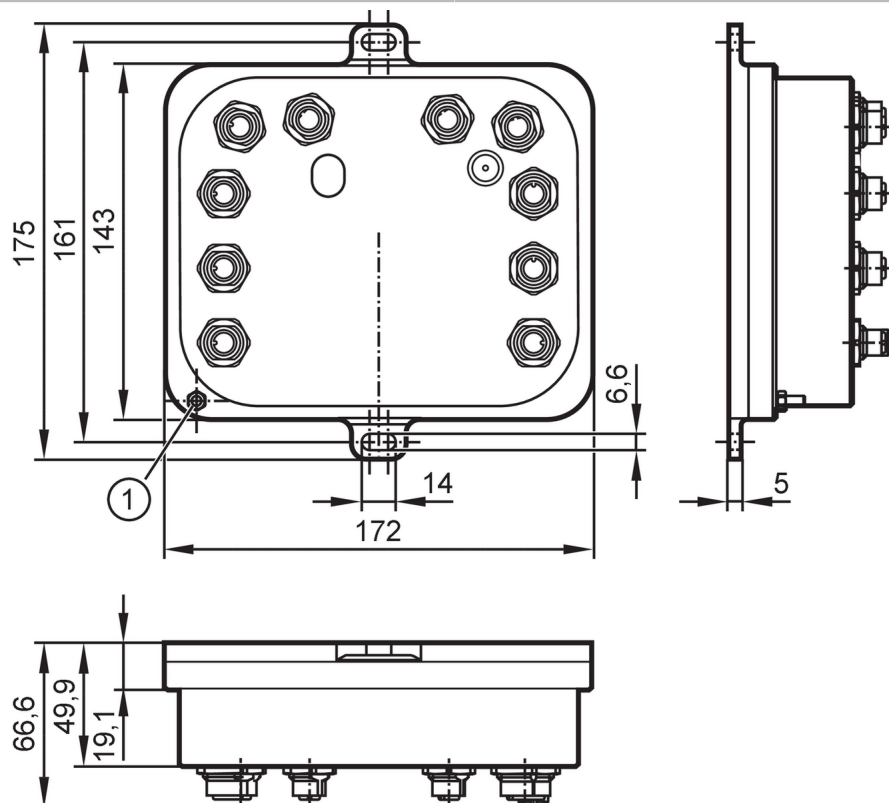

1 GND

**Product characteristics**

Communication interface	Ethernet
-------------------------	----------

Application

Design	parameter setting via PC software VES004
Application	continuous vibration monitoring

Electrical data

Operating voltage tolerance	[%]	20
Operating voltage	[V]	24 DC; (when using the IEPE input: 24 V + 20% IEPE = Integrated Electronics Piezo Electric)
Current consumption	[mA]	200; ((24 V DC))
Protection class		III

Inputs / outputs

Total number of inputs and outputs	8; (configurable)
------------------------------------	-------------------

Inputs

Total number of inputs	6
------------------------	---

Dynamic inputs

Number	4
Connection	S1...S4



Diagnostic electronics for vibration sensors

DIAGNOSTIC ELECTRONICS

Analog input	function type	Current, dynamic
	input range	0...10 mA / IEPE / 4...20 mA
	input frequency [Hz]	0,1...12000
	Resolution	16 bit
	sampling rate	100 kSamples
Process value inputs, analog / digital		
Number	2	
Connection	IN1 (pulse), IN2 (Current)	
Digital input	function type	pulse
	Circuit	HTL
	Frequency [Hz]	0,1...100000
Analog input	function type	Current
	input range [mA]	4...20
	Resolution	12 bit
Outputs		
Max. load	[Ω]	500
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Multi-function outputs, analog / digital		
Number	1	
Connection	OU1/Supply	
Digital output	Electrical design	PNP
	Output function	normally open / normally closed (configurable)
Analog output	function type	Current
	output range [mA]	4...20
Digital outputs		
Number	1	
Connection	OU2	
Digital output	Electrical design	PNP
	Output function	normally open / normally closed (configurable)
Interfaces		
Communication interface	Ethernet	
Number of Ethernet interfaces	1	
Ethernet Config		
Transmission standard	10Base-T; 100Base-TX	
Transmission rate	10/100 MBit/s	
Type of connector	M12	
Protocol	TCP/IP	
Factory settings	IP address: 192.168.0.1	
PROFINET IE1;IE2		
Transmission standard	100Base-TX	
Transmission rate	100 MBit/s	



Diagnostic electronics for vibration sensors

DIAGNOSTIC ELECTRONICS

Type of connector	M12
Protocol	PROFINET IO
Factory settings	IP address: 0.0.0.0
	subnet mask: 0.0.0.0
	gateway IP address: 0.0.0.0
	MAC address: see type label
Note on interfaces	CC-C (Conformance Class C) (IRT switch)
	Netload Class III
	SNMP (Simple Network Management Protocol)
	MRP (Media Redundancy Protocol)
	Supported network topologies: line ring

Operating conditions	
Ambient temperature [°C]	0...60
Storage temperature [°C]	0...60
Protection	IP 67

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV contact discharge / 15 kV air discharge
	EN 61000-4-3	10 V/m (80...2700 MHz)
	EN 61000-4-4 Burst	4 kV capacitive coupling probe, earthed
	EN 61000-4-6	10 V 0,15...80 MHz
	EN 61000-6-4	industrial environments
MTTF [years]	92	

Mechanical data	
Weight [g]	1388.2
Housing	rectangular
Type of mounting	Backplane mounting
Dimensions [mm]	175 x 172 x 66.6
Material	housing: Aluminum Alloy black anodized EN AW-5083

Data memory	
History memory	yes
Data memory buffered	yes
Data memory type	ring memory; FIFO
Real-time clock	yes
Memory location	internal
Memory interval	min. 1 min
Memory size	881664 data records

Accessories	
Accessories (optional)	cross-over Ethernet patch cable for the direct connection to the PC

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Connection	




Diagnostic electronics for vibration sensors

DIAGNOSTIC ELECTRONICS

Electrical connection - Sensor 1...4

Connector: 4 x M12; coding: A; Contacts: 4



- 1 L+
- 2 Signal
- 3 GND
- 4 Test

Electrical connection - Config / IE1 / IE2


Connector: 3 x M12; coding: D; Contacts: 4



- 1 TxD+
- 2 RxD+
- 3 TxD-
- 4 RxD-

Electrical connection - IN 1


Connector: 1 x M12; coding: A; Contacts: 3; Maximum cable length: 30 m



- 1 24 V DC
- 2 -
- 3 GND
- 4 IN 1 (pulses)

Electrical connection - IN 2

Connector: 1 x M12; coding: A; Contacts: 3; Maximum cable length: 30 m



- 1 24 V DC
- 2 IN 2 (4..20mA)
- 3 GND
- 4 -

Electrical connection - OU / Supply

Connector: 1 x M12; coding: A; Contacts: 4



- 1 24 V DC
- 2 analog / digital
- 3 GND
- 4 OU2: switch